

Operating the SHIMPO Hand Extruder



1. Push in metal tab to release plunger.



2. Be sure not to squeeze the trigger while pushing the tab.




3. Pull back on the plastic Pull to draw the plunger back.



4. Unscrew Die Cap from the front of the barrel.



5. Fill the barrel with soft clay.

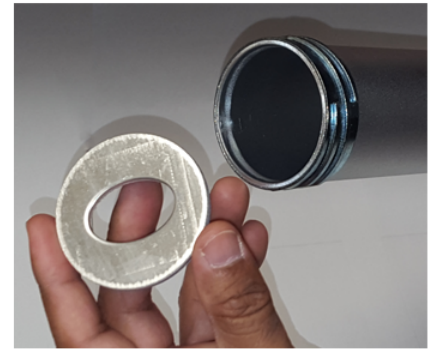

6. Place the desired die on top of the barrel.



7. Screw Die Cap back on to the barrel to secure the die in place.



8. Squeeze the trigger repeatedly to extrude out the clay in the shape of the die.