
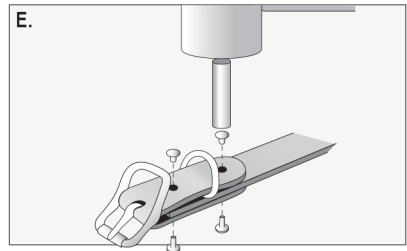
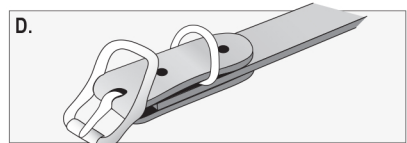
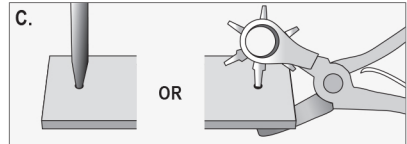
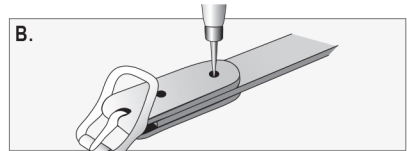


Assembly Instructions:

NOTE: Protect your work surface by using a poly cutting board. Always use a poly or wood mallet with tools to prevent damaging the tool.

Complete all designs, embellishments and edge finishing before assembly.

1. Measure your dog's neck, allow for two (2) fingers between neck and tape measure. Subtract 1" from that measurement.
2. Starting at the second hole on the collar strap, mark the length measurement from **Step 1**. Cut off excess strap on square end. (**Fig. A**)
3. Use buckle tab part to mark placement for new holes on cut end of strap (**Fig. B**):
 - Slip buckle onto the buckle tab.
 - Fold tab over cut end of strap.
 - Mark holes with stylus, pen, or pencil.
4. Punch holes using a 1/8" hole punch (round drive punch or rotary punch). (**Fig. C**)
5. Slip D-ring onto buckle tab behind buckle & position between holes as shown. Insert square end of strap and line up holes of all 3 layers. (**Fig. D**)
6. Follow instructions on rivet setter to set 2 rivets through all 3 layers. (Kit includes 1 extra rivet). (**Fig. E**)

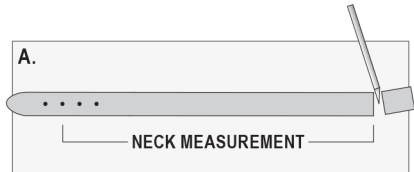

WARNING: CHOKING HAZARD
Small parts. Not for children under 3 years.

Find tutorials, tips, patterns and project ideas on realeather.com