


LED PERIMETER LIGHTS

DIRECTIONAL WARNING FOR ANY FIRE OR EMS APPARATUS




These high-output LED perimeter lights are available in three sizes to accommodate any application in the fleet. They are available in five single colors with split-color options as well. The perimeter lights feature 20 attention-grabbing flash patterns, field-replaceable outer lenses, a shock-resistant design and an extended 100,000-hour lifespan.


45BZ

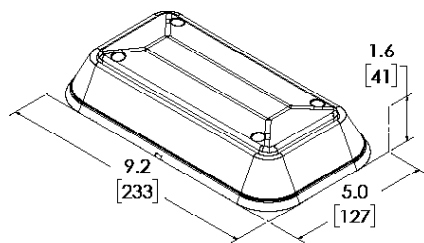

65BZ

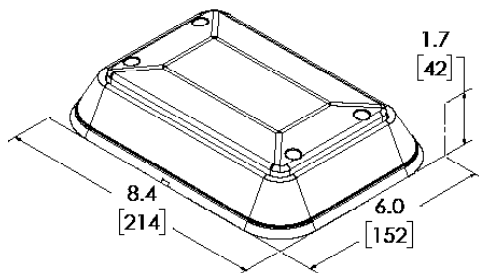

85BZ

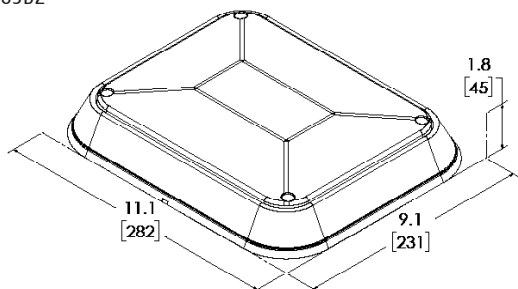

VOLTS	12V / 24V
DIMS	5.0" H x 9.2" L x 1.6" D 127mm H x 233mm L x 41mm D (45) (with bezel) 6.0" H x 8.4" L x 1.7" D 152mm H x 214mm L x 42mm (65) (with bezel) 9.1" H x 11.1" L x 1.8" D 231mm H x 282mm L x 45mm D (85) (with bezel)
FLASH PATTERNS	20
CERTS	CLASS I (SAE J595) A & R only, CLASS II (SAE J595) B & W only, CA T13, NFPA, KKK-A 1822F
DETAILS	• Surface mount • Sealed waterproof power supply • Shock resistant • Rated 100,000 hour life • Illumination Colors dictates lens color*

REPLACE " _ " with A = Amber, B = Blue, G = Green, R = Red, W = White

MODEL	TYPE	LENS	ILLUMINATION COLORS
45BZ_	Single-Color	*	A, B, G, R, W
45BZ_ _	Split-Color	*	RA, RB, RW
45BZC_	Single-Color	C	A, B, R
45STBZR	STT	*	R
45BZRV	Reverse		W
65BZ_	Single-Color	*	A, B, R, W
65BZ_ _	Split-Color	*	RA, RB, RW
65BZC_	Single-Color	C	A, B, R
65BZRS	Steady Burn	*	R
65BZRV	Reverse	*	W
85BZ_	Single-Color	*	A, B, R, W
85BZC_	Single-Color	C	A, B, R
-	Single-Color	C	A, R
85BZ_ _	Split-Color	*	RA