



REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE PER EL0268	2021-11-15
02	REVISED PER EL0268	2021-11-23
A	INITIAL RELEASE PER EL0268	2021-11-30

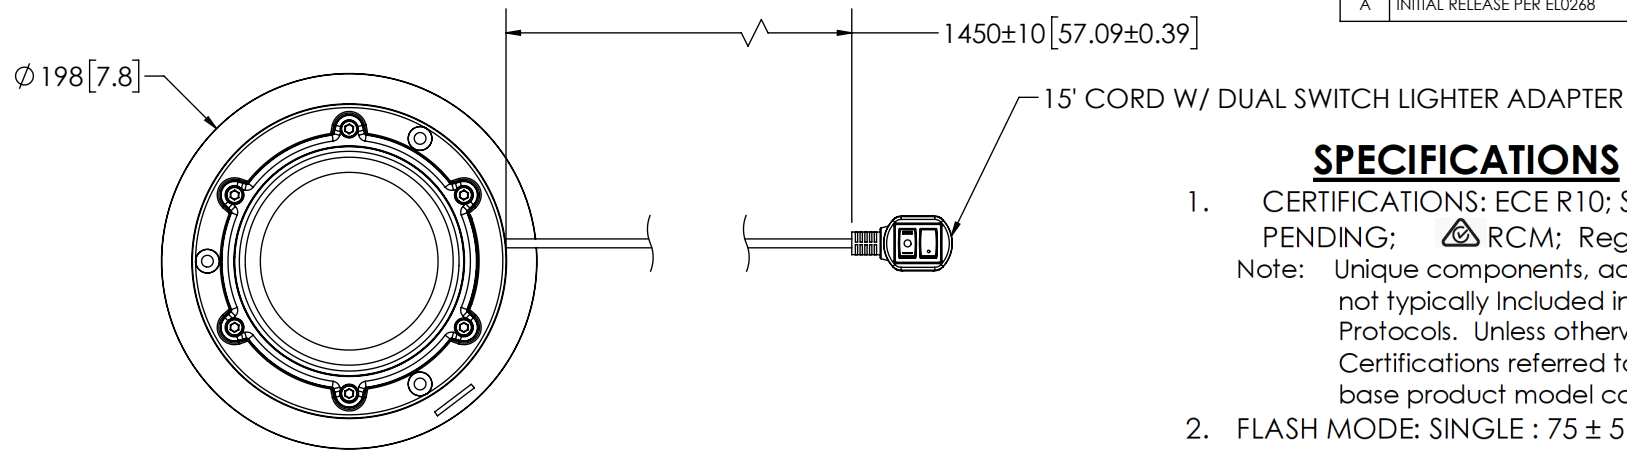

TOP VIEW

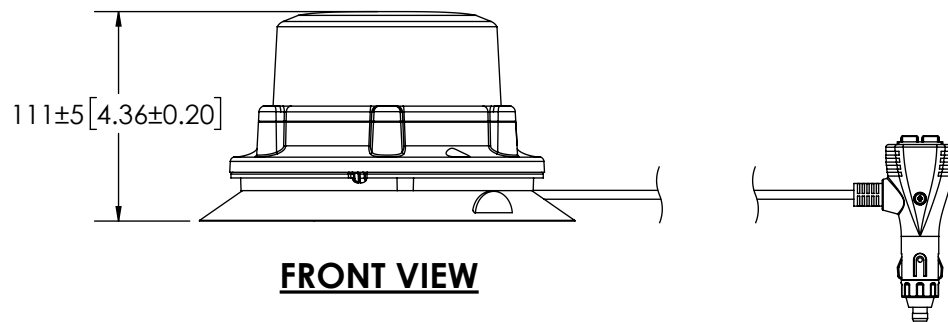

FRONT VIEW

SPECIFICATIONS

- CERTIFICATIONS: ECE R10; SAE PENDING; CA Title 13 PENDING; RCM; Reg 65 Cert; IP67/IP69K
Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
SINGLE : 120 ± 5 FLASHES PER MINUTE
DOUBLE : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 10-32 VDC
- CURRENT (PEAK): 4.4A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 60.7W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 140°F (60°C)
- CONNECTION: 15' CORD W/DUAL SWITCH LIGHTER ADAPTER
- MOUNTING: VACUUM MAGNET
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 3.4 LBS (1.53 Kg)

COLOR CHART

FGS. NO.	COLOR
EB8160A-VM	AMBER

- NOTES:
- DIMENSIONS IN MILLIMETERS [INCHES (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2021 ELECTRONIC CONTROLS COMPANY

SCALE 1:4		APPROVALS	DATE	 ECCO [®] www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01		DRAWN BY	2021-11-23	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED BTKABD	2021-11-24	
MECH. ENG.				
<u>MILLIMETERS DECIMALS</u> XX. ± 1.0mm XX.X ± 0.5mm	<u>INCHES DECIMALS</u> X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	<u>ANGLES</u> ± 0.5° <u>FRACTIONS</u> ± 1/64	ELEC. ENG. SPO	2021-11-24
			TEST ENG. JRT	2021-11-23
			SALES.	
Electronically Controlled Use Latest Copy				LED HD BEACON,3 BOLT,10-30VDC,VM CUSTOMER PART NO. SEE CHART
				SIZE: A4 DWG. NO. EB8160X-VM REV. A
				Project: EL0268 Date Created: 2021-11-15

THIRD ANGLE PROJECTION	
	