



Spectre Corp

Model 9500 Precision Combination Series Transducer

- Highest performance transducer over temperature. Zero thermal error/drift
- Units are individually calibrated from -40°C to 85°C for pressures ranging from 0-5" WC to 40,000 PSI
- 0.05% & 0.03% BFSL (STANDARD) – Contact Factory for other options
- 16 Point Calibration with Certificate (STANDARD)

- Unparalleled thermal stability from -40°C to 100°C
- Transducer maintains stated accuracy throughout entire temperature compensated range
- Duplicate any customer process and electrical connector for transparent replacement
- Multiple Temperature Outputs available

Spectre's ZERO Drift High Performance Transducer is the world's only pressure transmitter that maintains performance over temperature by eliminating the largest sources of error:

Zero & Thermal Drift



FEATURES:

Proprietary Fused Bond Sensor

Sensor Wetted Material Machined from Stainless Steel Bar Stock (No Welds)


RFI/EMI Protection

Digital Correction for non-linearity and inaccuracies within the sensing element

Multiple Temperature and Pressure Output Options (Custom on Request)

Suitable for high shock and vibration applications

REFERENCE DIMENSIONS:

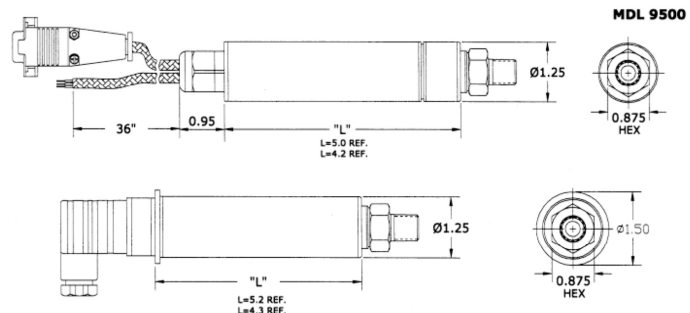

Spectre Corp
7912 Root Road
Suite C/D
North Ridgeville, Ohio 44039



www.SpectreCorp.com
Phone: (440) 250-0616
Fax: (440) 353-0269
E-Mail: info@spectresensors.com



Model 9500 Precision Combination Series Transducer

A	(0-500)	2	D	1	05	EC2
PRESSURE PORT	RANGE ¹	TYPE	PRESSURE OUTPUT	TEMP OUTPUT	ACCURACY (BFSL)	CONNECTOR ²
A = 1/4" MNPT	PSI	1 = ABSOLUTE	D = 4-20 mA	1 = 4-20 mA	05 = 0.05%	EC1 = 36" PIGTAIL ³
B = SAE-4 MALE	BAR	2 = GAUGE	E = 0-5 VDC	2 = 1-5 VDC	03 = 0.03%	EC2 = LARGE DIN 43650, FORM A
C = OTHER	kPA	3 = VACUUM	F = 0-10 VDC	3 = TC		EC3 = MINI DIN 43650, FORM C
E = F-250 C	INCHES WC	4 = SEALED	M = mV/V	4 = RTD		EC4 = BENDIX PTIH-10-6P
	TORR	5 = COMPOUND		7 = OTHER		ECT = TURCK M12
		6 = OTHER				ECX = OTHER

Ordering Guide: 9500-A-(0-500PSI)-2-D-1-05-EC1-PB

¹ OTHER RANGES AVAILABLE, CONSULT FACTORY

² CUSTOM PINOUTS/WIRING AVAILABLE, PLEASE SPECIFY UPON ORDER PLACEMENT

³ PVC STANDARD CABLE JACKET-OTHERS

AVAILABLE ON REQUEST

PB
OPTIONS
PB = PUSH BUTTON RE-ZERO
NO = NONE
OPX = OTHER (SPECIFY)

TYPICAL APPLICATIONS		
Engine Test Stands	Diesel-Internal Combustion	Laboratory
Leak Detection	Emission Testing	Bake Testing
Turbine-Rocket/Jet Engine Testing	Production Test Stand	Military
Transmission Testing	Off-road Vehicles	Tank Level

Performance @ 25 °C
Accuracy: < ± 0.05% BFSL to 0.02% BFSL
Stability: (2 year): <± 0.10% FSO, Typical
Overpressure Protection: 2X Rated Pressure
Burst Pressure: 5X Minimum
Pressure Cycles: > 50 Million
Temperature Range: -40 °C to 100°C
Response: ≤ 2 ms to 90%

Electrical Data
Excitation: 13-36 VDC
Current Consumption: < 5 mA
Zero Offset: ≤±0.1% of FS
Span Tolerance: ≤±0.1% of FS
Output Load: > 10K Ω

⁴ Thermal changes will not affect overall accuracy.

Environmental Data
Temperature
Operating: -40°C to 85°C
Storage: -50°C to 125°C
Thermal Limits
Compensated Range: -40°C to 85°C
Thermal Effect Zero: Negligible ⁴
Thermal Effect Span: Negligible ⁴

Physical Data
Sensor
Wetted Material: 316 SS
Housing: 316 SS
Connections
Pressure: 1/4" MNPT, SAE-4, F-250 C (Others on request)
Electrical: Cable, DIN, Bendix, M12 (Others on request)





Spectre Corp

**Spectre Corp
7912 Root Road
Suite C/D
North Ridgeville, Ohio 44039**



**www.SpectreCorp.com
Phone: (440) 250-0616
Fax: (440) 353-0269
E-Mail: info@spectresensors.com**