


MILLMIX[®] sheeting and mixing mill



	Unit	400 x 1,000	500 x 750	550 x 1,500	600 x 1,800	660 x 2,100	750 x 2,500	910 x 3,050
Roll diameter	mm	400	500	550	600	660	750	910
Roll length, total	mm	1,000	750	1,500	1,800	2,100	2,500	3,050
Roll length, usable	mm	880	620	1,380	1,680	1,980	2,380	3,000
Roll speed	rpm	24	19.1	17.5	16	14.5	12.7	10.5
Peripheral speed	m/min.	30	30	30	30	30	30	30
Drive power	kW	2 x 37	2 x 55	2 x 75	2 x 95	2 x 130	2 x 175	2 x 275
Individual drive for each roll friction area		Infinitely adjustable from 0.1 to 1.0, the friction can be adjusted independently from mill side, front to rear roll / rear to front roll						
Cooling water consumption		8	10	14	18	20	22	33
Weight	t approx.	11	16	21	31	35	45	90

All data are nominal and may vary to suit a specific application

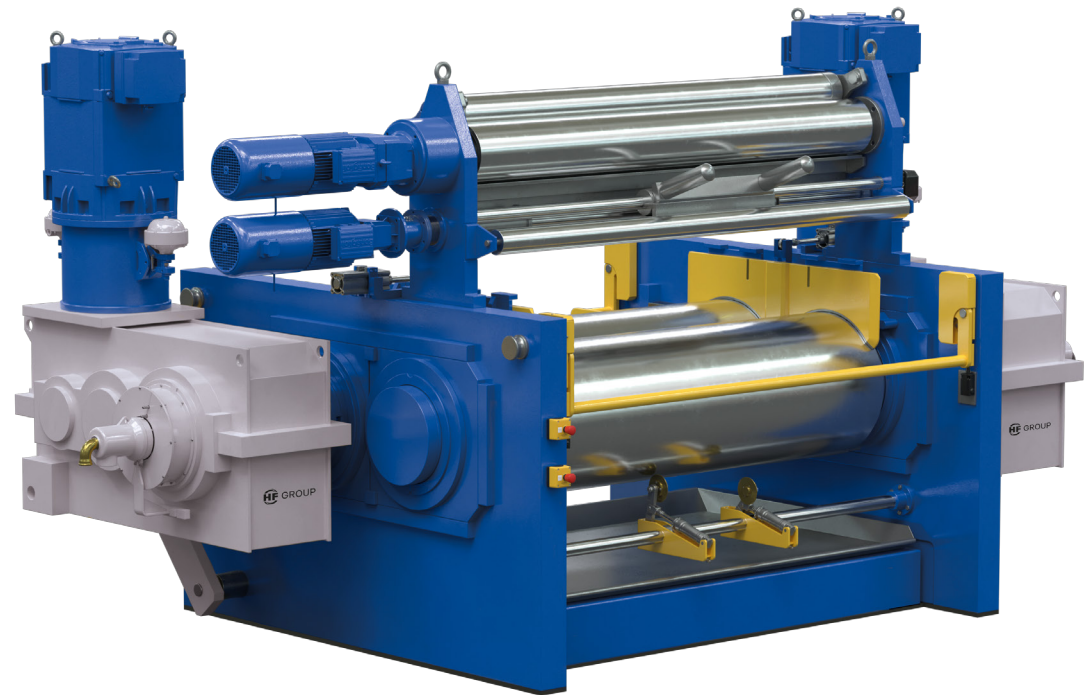