



Description

The Truffle-KTR24 is the smallest model in the compact line of Truffle subwoofer.

The source subwoofer has a frequency range of 45 Hz to 150 Hz and is comprised of a single 4" driver with passive radiators. Easy to conceal, the Truffle-KTR24 has an 8"-long cylindrical speaker box equipped with one

4" active driver on one end and one 4" passive speaker on the other, making the box a perfect omnidirectional low-end source.


This subwoofer provides the low-end frequencies for the Azimut-KAMUT2L1 audio system.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	4" ferrite magnet woofer with 1" voice coil + 4" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Sensitivity	82.4 dB (1W, 1m)
Max SPL	112 dB ¹
Power handling	60 W
Nominal Impedance	4 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP54
Dimensions & Weight	120 x 116 x 190 mm (4.7 x 4.6 x 7.48 in) 1.5 kg (3.31 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

1. Maximum SPL is calculated using crest factor 4 (12dB) from sensitivity scaled @1m and power handling specifications, exclusive of power compression.

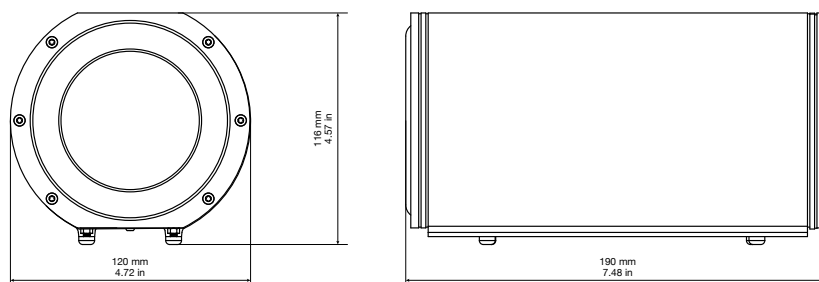

Notes for data:
Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.