


X24 SERIES

The Normet Xrock X24-series offers breaker booms designed for tight spaced operations in stationary and mobile applications. This series blends a sleek, compact design with robust performance, ideal for precision and power in tight workspaces.

Robust, lightweight steel plate design for excellent maneuverability in narrow workspaces.

Maintenance-free cylinder eye bearings ensure continuous operation and extended service life with cost savings.

Compact footprint and lightweight design eliminates the need for a heavy platform, ensuring cost-efficiency throughout the entire service life.

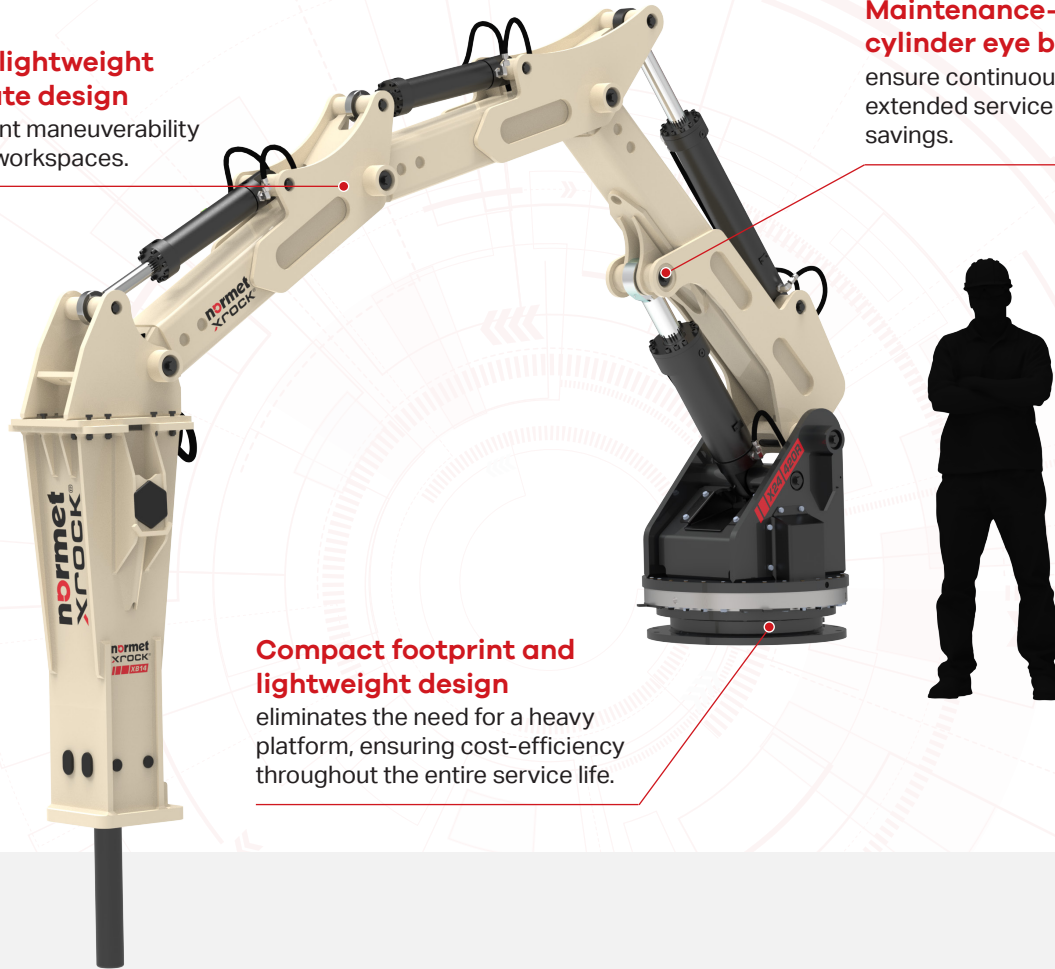

SPECIFICATION

	X24-290R	X24-420R
Maximum reach (incl. nominal breaker), m (ft)	4.7 (15.4)	6.0 (19.7)
Horizontal reach, max (breaker vertical), m (ft)	3.0 (9.8)	4.0 (13.1)
Vertical reach, max (incl. nominal breaker), m (ft)	2.6 (8.5)	3.9 (12.8)
Recommended breaker weight, kg (lb)	300 - 600 (660 - 1320)	300 - 600 (660 - 1320)
Operating mass, without breaker, kg (lb)	1 450 (3 197)	1 700 (3 748)

X24-420R BREAKER BOOM

offers additional reach with a stick boom.

POWER UNITS

Normet Xrock power units offer streamlined power to maximize boom and breaker performance. Our power units are delivered fully assembled and rigorously tested, ensuring immediate readiness for deployment. The power unit system is ready for use by simply connecting it to the boom and providing the necessary power supply. Integrated drip tray is always included in our power units and their accessible service points allow effortless maintenance.



ACCESSORIES

Wireless Remote Control

The wireless and lightweight, our handheld remote control enables flexible operations from a secure and remote location.

Automatic lubrication system

The automatic lubrication system improves uptime and safety by reducing the necessity for potentially hazardous boom maintenance procedures.

Automatic breaker lubrication system

The automatic breaker lubrication system enhances the operational lifespan of breakers and ensures peak equipment performance over an extended period.

SPECIFICATION

	PU18-43
Weight without oil, kg (lb)	800 (1 764)
Oil tank volume, l (gal)	250 (66)
Oil flow, l/min (gal/min) 1500 rpm (50 Hz)	65 (17)
Oil flow, l/min (gal/min) 1800 rpm (60 Hz)	78 (20)

COMPATIBLE BREAKERS

To optimize productivity, extend equipment lifespan, and maximize usability, complement your Normet Xrock booms with perfectly compatible Normet Xrock hydraulic breakers. The thoughtfully curated features of Normet Xrock breakers, paired with our agile and maneuverable booms, guarantee efficient task completion while maintaining cost-effectiveness in your operations.



SPECIFICATION

	XB5	XB6
Operating weight, kg (lb)	335 (738)	450 (992)
Oil flow, l/min (gal/min)	25 - 60 (6.6 - 15.8)	45 - 100 (11.8 - 26.4)
Impact rate (bpm)	450 - 1 000	500 - 1 050
Operating pressure, bar (psi)	110 - 120 (1 595 - 1 740)	110 - 120 (1 595 - 1 740)
Tool diameter, mm (in)	70 (2.7)	75 (2.9)
Noise level (dB)	125	127
Excavator weight, t (lb)	4 - 8 (1 7636 - 3 0864)	5 - 10 (11 023 - 22 046)