



# Utimec LF 1000 Water



Normet reserves the right to change this specification without further notice



## INTRODUCTION

DOC056095.3 - 03.06.2024

**LF 1000 Water** with 10 m<sup>3</sup> transport capacity is designed for water transportation and dust preventing in underground mines.



#### **POWER TRAIN**

L-series units have powerful 6-cylinder liquid cooled turbocharged 185 kW Volvo Penta engine. Available emission standards are Tier 3 / Stage IIIA and Stage V that provide clean and efficient operation.

Machine is equipped with Dana hydrodynamic transmission and planetary type axles which have hydraulically powered dual-circuit oil immersed multidisc service brakes. Moreover, axles have spring applied hydraulically released fail-safe -type parking/safety brake.




#### **SAFETY AND USABILITY**

Vehicle has an front axle suspension system, which improve safety, driving comfort and increases component lifetime.

Normet's FOPS and ROPS approved safety cabin provides superior visibility and comfortable compartment for the driver and the passenger. Cabin controls are easy and ergonomic to use, and the multifunctional display (MID) provides driving information (speed, RPM, temperatures, safety warnings & alarms etc.), which can be recorded for further analysis.

Enclosed cabin provides low noise level ensuring safe and comfortable driving.

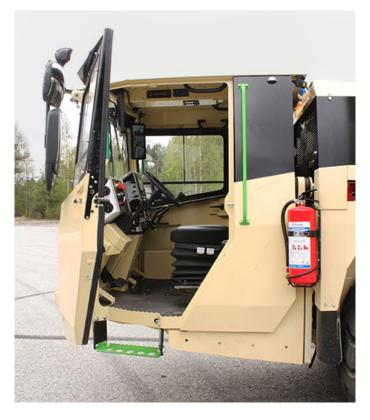

Electric system is designed for harsh underground environment. System consists of self-extinguishing wire harnesses with tinned wires, water tight conduits and all exposed components are minimum IP65 protection class. In addition, vehicle layout allows easy access to all service points, all daily checks can be done from the ground level.



Normet reserves the right to change this specification without further notice



## **TECHNICAL SPECIFICATION**

DOC056095.3 - 03.06.2024

#### **WATER MODULE**

Carrying capacity 10 000 I

Pumping capacity:

- Standard pump 800 I/min
- Sump dewatering system 1600 l/min
- High capacity pump with water cannon

Hose reel with hose

#### **ENGINE AND TRANSMISSION**

 Volvo Penta TAD851VE, 185 kW/2200 rpm, with engine brake, Tier 3 / Stage IIIA approved

Exhaust system:

- · Catalytic exhaust gas purifier and muffler
- Diesel particulate filter (DPF)

Fuel tank capacity: 280 I

#### Dana T14 series powershift transmission with lock-up

- 4 speeds forward and 3 reverse
- 4-wheel drive

Gear selector:

- Manual
- Automatic
- Volvo Penta TAD881VE, 185 kW/2200 rpm, with engine brake, Stage V approved

Requires diesel exhaust fluid (DEF) and Ultra-low sulphur diesel (ULSD)

Diesel particulate filter (DPF)

Selective catalytic reduction (SCR)

Fuel tank capacity: 280 I DEF tank capacity: 25 I

#### Dana T14 series powershift transmission with lock-up

- 4 speeds forward and 3 reverse
- 4-wheel drive

Gear selector:

- Manual
- Automatic

#### **PERFORMANCE**

Tramming speed (horizontal) 28 km/h

Lateral gradient for tramming (continuous)

Longitudinal gradient for tramming (continuous) 9°

Depending of machine configuration, lateral and longitudinal tramming gradient can temporarily be higher.

#### **AXLES AND BRAKES**

Load end axle:

Dana 113 series fixed

Engine end axle:

Dana 113 series

Hydro-pneumatic suspension and +/- 7° oscillation

Service brake: hydraulically powered dual-circuit oil immersed multidisc brakes in both axles

Safety/Parking brake: spring applied hydraulically released failsafe -type brake

Brake testing possible from cabin

#### **TYRES AND RIMS**

- Nokian Tyres 14.00-24" with NDT inspected rims
- o Bridgestone 14.00-24" with NDT inspected rims

#### **STEERING**

Orbitrol type hydraulic frame steering

Frame articulation +/- 40°

#### **HYDRAULIC SYSTEM**

Variable displacement pump system:

190 bar, 135 l/min at 2200 rpm

Hydraulic oil tank capacity 180 I

#### **24 VDC ELECTRICAL SYSTEM**

LED driving and indicator lights

LED work lights

LED side lights

Warning LED light:

#### Color

- Amber
- Blue
- Red
- Green (n/a with rotating light pattern)
- White (n/a with rotating light pattern)

## Light pattern

- Strobe
- Rotating

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

40



DOC056095.3 - 03.06.2024

#### **DRIVER'S COMPARTMENT**

#### Cabin type:

- Open cabin FOPS/ROPS approved
- Enclosed cabin FOPS/ROPS approved

#### Driver's seat and seat belt:

- Air suspended T-back seat with 3-point seat belt
- o Air suspended heavy duty seat with 3-point seat belt

Cabin door interlock switches with safety brake application

#### Passenger's seat:

- T-back seat with 3-point seat belt
- Heavy duty seat with 3-point seat belt
- 2 seats with retractable lap seat belts (n/a with side facing pedals)

#### Throttle and brake pedal layout:

- · Front facing pedals
- Front and side facing pedals with seat swivel

#### **MACHINE CONNECTIVITY**

- Machine connectivity hardware (WLAN/3G/4G/LTE)
- Analytics license (includes connectivity hardware)

#### **TECHNICAL DOCUMENTATION**

#### Standard documents:

Instruction manuals, hard copy 2 pcs:

- English
- Russian
- One of destination EU languages

Spare parts manuals, hard copy 2 pcs:

- English
- Russian

PDF manuals on USB-stick 2 pcs, includes instruction and spare parts manuals

#### Additional documentation:

- Extra hard copies of manuals
- o Extra PDF manuals
- LinkOne WebView electronic manuals
- Other than standard language manuals

#### **OTHER**

#### Powder extinguisher:

- 6 kg
- 12 kg
- Ansul Sentry

#### Number of extinguishers:

- 1
- o 2

#### Painting and taping:

- · Standard painting and taping
- Painting and taping according to customer specifications

#### Text labels in:

- En/Ru/One of destination EU-languages
- Other language

#### Measurements:

- Noise
- Vibration
- Emissions

Normet reserves the right to change this specification without further notice



## **ACCESSORIES**

DOC056095.3 - 03.06.2024

#### **PROCESS PRODUCTIVITY**

- Road watering system
- Wall washing addition to road watering system
- Retarder
- Front support legs
- Pressure washer with 230 I tank on cabin roof (increases cabin height by 250 mm)

#### **CARRIER PRODUCTIVITY**

- · Accessories for open cabin:
  - Two-piece windscreen with wipers
  - Windshield with wipers
  - Protective grids
- Accessories for enclosed cabin:
  - Two-piece windscreen
  - Sliding rear window
  - Audio system
  - Air conditioning with heating
  - Heated mirrors
- 12 V, 20 A power supply in cabin with socket and connector
- Auto engine shutdown during idling
- Engine shutdown delay
- Inlet plug for jump start
- Block heater with interior heater and battery charger 230 V (Interior heater available with enclosed cabin)
- Block heater with interior heater, battery charger, hydraulic oil and filter heaters 400 V (Interior heater available with enclosed cabin)
- Fuel operated pre-heater
- Fast fuel filling system
- o Hand pump for filling of hydraulic tank
- Fluid evacuation panel with sampling points
- Automatic lubrication system
- Reversing camera:
  - 1 camera, 1 display
  - o 3 cameras, 3 displays
  - 1 camera, 1 display and reversing radar
  - $\circ \quad \text{4 cameras, 3 displays with recording support} \\$
- Spare rim and tyre
- Toolbox and maintenance tools
- o Interior cooling fan
- Wax tape for electric connectors

Normet reserves the right to change this specification without further notice



#### DOC056095.3 - 03.06.2024

#### **SAFETY**

- Cabin door puddle lights
- Extra warning LED light

#### Color

- Amber
- Blue
- Red
- Green (n/a with rotating light pattern)
- White (n/a with rotating light pattern)

#### Light pattern

- Strobe
- Rotating
- Direction lights (Green/Red)
  - Both lights always on
  - Lights follows driving direction
- Extra warning LED light with battery backup

#### Color

- Amber
- Blue
- Red
- Green (n/a with rotating light pattern)
- White (n/a with rotating light pattern)

#### Light pattern

- Strobe
- Rotating
- Seat belt interlock switch applies safety brake
- Fire extinguisher system
  - Dry chemical

#### Ansul A-101

- Manual
- Automatic, Checkfire
  - 110
  - o 210
- Liquid agent

#### Ansul LVS

- Manual
- o Automatic, Checkfire
  - 110
  - o 210
- Gear lockout:

#### Forward:

- Highest gear locked out
- 2 highest gears locked out

#### Reverse:

- Highest gear locked out
- o 2 highest gears locked out
- Engine end safety rails and ladder
- Front and rear grounding straps
  - Flat cable
  - ∘ Chain

- Pump for brake release
  - Electric pump
  - Hand pump
- Redundant brake monitoring system
- Methane monitoring system
- Protection guards for tunnel curtains
- Tyre pressure indicators
- Warning triangles
- Flashlight with charger
- Hearing protectors
- Wheel chocks with brackets
- Service isolator for starter

Normet reserves the right to change this specification without further notice



## **SERVICES**

DOC056095.3 - 03.06.2024

#### **NORMET SERVICES**

Normet is committed to servicing its customers all over the world. We provide service from a single machine to an entire fleet. The Normet service offering consists of many different products from delivery of parts and training to fleet performance agreements.

More information check normet.com:

https://www.normet.com/en/products-and-services

For any questions about Normet Services contact local Normet.

https://www.normet.com/en/contact/

#### **SPARE PARTS**

As a leading global Original Equipment Manufacturer, we are committed to providing a complete solution to your spare parts needs. All of Normet's spare parts are manufactured to the highest possible standards to help maintain the safety and profitability of your projects. Our spare parts improve efficiency and total cost of ownership throughout your operations.

Start a carefree journey with Normet equipment by having the right selection of parts available from the beginning.

Spare part recommendation / Start-up Spare Part package: Available for the first 2000h\*: includes periodical service parts, most common wearing parts and other recommended parts. (\*Recommendations are based on average hours that can vary depending on worksite conditions.)

Underground, every part is critical!

More information check https://www.normet.com

#### **SERVICE AGREEMENTS**

Service agreements are always customized to meet our customer needs, consisting of various Normet service products. The service solution is created together with the customer and the level of an agreement can vary with different support agreements (including e.g. parts, periodical maintenance, oncall services, and audits) up to guaranteed fleet availability or process performance (including e.g. parts, all maintenance activities, operator trainings and process audits).

Note that we can provide Digital solutions with connected equipment.

More information check normet.com.

#### **TRAININGS**

Training services can be tailored to your individual needs and range from equipment service training to process application training.

We offer a sustainable training path from the beginning of your operation to the execution stage of your project.

More information check normet.com.

#### **COMMISSIONING**

Equipment commissioning concerns **equipment familiarization**. This is included as part of Normet vehicle delivery. Safety introduction and operating basics for Normet Equipment. Review of Normet user and spare parts manuals. Hands-on equipment safety device operational training. Ensure product quality and customer satisfaction during handover.

Commissioning includes machinery handover to customers and safety operating principles without technical insights or process application training.

#### **EXTENDED COMMISSIONING**

We offer an extended training package on top of standard commissioning. Normet provides extended commissioning services that offer basic insights into maintenance manuals, periodical and daily maintenance, as well as modern operating perspectives to maximize handling efficiency. Safety-oriented training ensures reliable operations for Battery Electric Vehicles and Diesel-Driven based on your vehicle fleet. This cost-effective solution covers the essential aspects of equipment operation, safety, and maintenance schedules.

To ensure continuous and maximized safe operations with your new equipment and to expand your knowledge scale of operations, this option is the most suitable and recommended option for extending your new equipment training. This cost-effective solution covers the essential aspects of equipment operation, safety, and maintenance schedules.

#### **UPGRADES AND MODIFICATIONS**

We build our machines to last. We also understand that your needs on the ground can change - and reacting to that change makes a big difference in your productivity. Normet Upgrades & Modifications provide you with access to product improvements that meet your evolving requirements and let you stay one step ahead of the curve.

Contact your local Normet office for Upgrade offering to your fleet.

More information check normet.com.

Normet reserves the right to change this specification without further notice




# **DIMENSIONS**

DOC056095.3 - 03.06.2024


Length	9880 mm	Track	1950 mm
Width	2300 mm	Ground clearance as shown	360 mm
Height	2480 mm	Turning radius outer	8190 mm
Height of cabin	2380 mm	Turning radius inner	5450 mm
Wheel base	4910 mm		

## SIDE VIEW - BASIC MACHINE

Dimensions in () apply when the cabin is installed in the upper position.

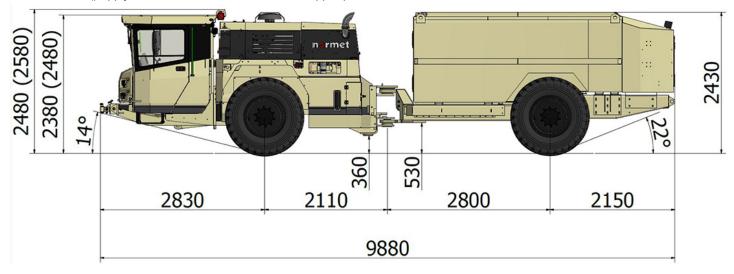


#### **SIDE VIEW - MACHINE WITH OPTIONS**

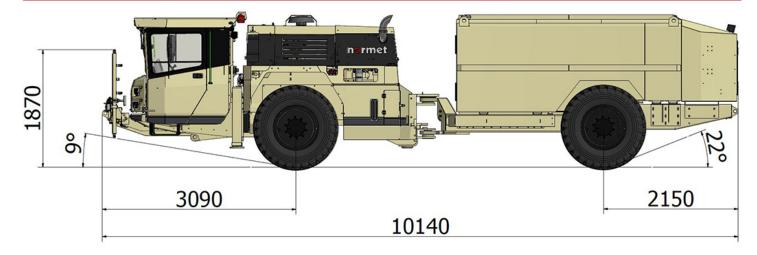


Normet reserves the right to change this specification without further notice



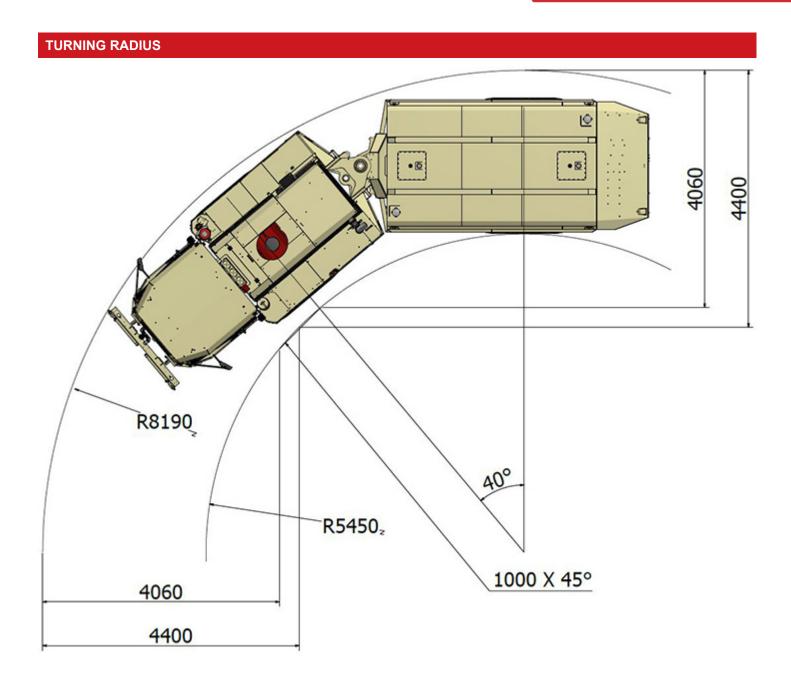


Normet reserves the right to change this specification without further notice





#### **TOP VIEW**

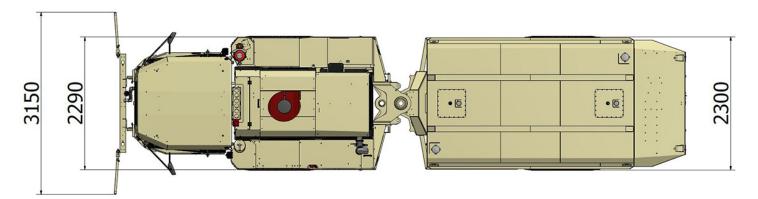

## FRONT AND BACK VIEWS





Normet reserves the right to change this specification without further notice



# TRACTIVE EFFORTS

DOC056095.3 - 03.06.2024

#### **OPERATING WEIGHT**


Empty 15 000 kg

Fully loaded 25 000 kg

final machine weight variate in agree with selected options

#### **VOLVO PENTA TAD 851/881 185 KW**

Performance curve with turbine lock-up DOC059932

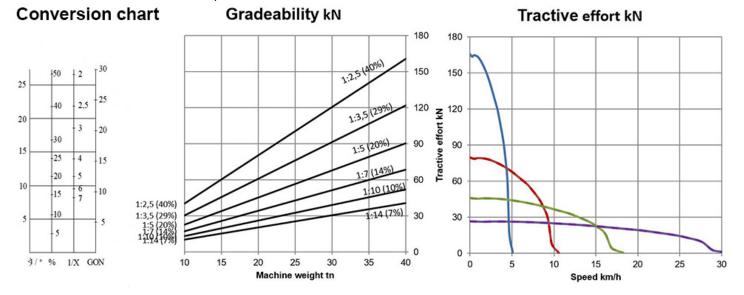

Normet reserves the right to change this specification without further notice