



# Utilift MF 330



Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

## INTRODUCTION

**Utilift MF 330** Scissor Lift with lifting capacity up to 3 tonnes and max. platform height of 3.5 m is designed to provide a safe work platform for all kinds of installation works in tunnels up to 5.5 m high.

Typical applications are fan installations, ventilation ducting, electrification works and piping for air and water services. Optional side extensions provide complete drift coverage from single setup practically in all kinds of mine headings. The works can be accomplished safely, efficiently and comfortably from the level work deck, elevated to a optimum work height.



### POWER TRAIN

M-series units have powerful 4-cylinder liquid cooled turbo-charged engines, which power range is between 110-121 kW, depending of the selected engine model. Available emission standards are Tier 3 / Stage IIIA and Stage V that provide clean and efficient operation.

Machine is equipped with Dana hydrodynamic transmission and planetary type axles which have hydraulically powered dual-circuit oil immersed multidisc service brakes. Moreover, axles have spring applied hydraulically released fail-safe -type parking/safety brake.

### SAFETY AND USABILITY

Vehicle has an optional front axle suspension system, which improve safety, driving comfort and increases component lifetime.

Normet's FOPS and ROPS approved safety cabin provides superior visibility and comfortable compartment for the driver and the passenger. Cabin controls are easy and ergonomic to use, and the multifunctional display (MID) provides driving information (speed, RPM, temperatures, safety warnings & alarms etc.), which can be recorded for further analysis.

Enclosed cabin provides low noise level ensuring safe and comfortable driving.

Electric system is designed for harsh underground environment. System consists of self-extinguishing wire harnesses with tinned wires, water tight conduits and all exposed components are minimum IP65 protection class. In addition, vehicle layout allows easy access to all service points, all daily checks can be done from the ground level.

# TECHNICAL SPECIFICATION

## LIFTING PLATFORM

### Dimensions:

- 1800 X 3200 mm
- 1800 X 3200 mm
- Side extensions 730 mm

Lifting capacity 3000 kg

Max. lifting height 3500 mm

Start/stop from platform

Battery operated emergency pump

Rear handrails of platform

Standard gate to climb in platform

Safety monitoring system of MEWP:

- Dangerous movement preventing system (mandatory in NAP, NAS, CE area)
- Dangerous movement warning system with overload monitoring

## ENGINE AND TRANSMISSION

- **Deutz TCD 2013 L4, 120 kW/2300 rpm, Tier 3 / Stage IIIA approved**

Exhaust system for Deutz engine:

- Catalytic exhaust gas purifier and muffler
- Diesel particulate filter (DPF)

Fuel tank capacity 110 l

### Dana 24000 series powershift transmission

3 speeds forward and reverse

4-wheel drive

Manual gear selector

- **Mercedes-Benz OM 904 LA, 110 kW/2200 rpm, with engine & exhaust brakes, Tier 3 / Stage IIIA approved**

Exhaust system for MB engine:

- Catalytic exhaust gas purifier and muffler
- Diesel particulate filter (DPF)

Fuel tank capacity 110 l

### Dana 24000 series powershift transmission with lock-up

3 speeds forward and reverse

4-wheel drive

Gear selector:

- Manual
- Automatic

- **Cummins B4.5, 121 kW/2500 rpm with exhaust brake, Stage V approved**

Requires diesel exhaust fluid (DEF) and Ultra-low sulphur diesel (ULSD)

Diesel particulate filter (DPF)

Selective catalytic reduction (SCR)

DEF tank capacity: 19 l

Fuel tank capacity: 105 l

### Dana 24000 series powershift transmission with lock-up

3 speeds forward and reverse

4-wheel drive

Gear selector:

- Manual
- Automatic

## PERFORMANCE

Tramming speed (horizontal):

Deutz 26 km/h

Mercedes-Benz 26 km/h

Cummins 26 km/h

Lateral gradient for tramming (continuous) 4°

Longitudinal gradient for tramming (continuous) 9°

## AXLES AND BRAKES

Load end axle:

Dana 123 series fixed

Engine end axle:

Dana 123 series

- +/- 8° oscillation
- Hydro-pneumatic suspension and +/- 8° oscillation

Service brake: hydraulically powered dual-circuit oil immersed multidisc brakes in both axles

Safety/Parking brake: spring applied hydraulically released fail-safe -type brake

## TYRES AND RIMS

Nokian Tyres 10.00-20" with NDT inspected rims

## STEERING

Orbitrol type hydraulic frame steering

Frame articulation +/- 40°

## HYDRAULIC SYSTEM

Variable displacement pump system:  
190 bar, 135 l/min at 2200 rpm

Hydraulic oil tank capacity 110 l

## 24 VDC ELECTRICAL SYSTEM

Main switch:

- Mechanical switch in battery box
- Electric switch with control in cabin and service switch in battery box
- Electric switch with control in cabin, start isolator and service switch in battery box

LED driving and indicator lights

LED work lights

LED side lights (left/right):

- White / White
- Green / Red
- Red / Green

Warning LED light:

Color

- Amber
- Blue
- Red
- Green (n/a with rotating light pattern)
- White (n/a with rotating light pattern)

Light pattern

- Strobe
- Rotating

## DRIVER'S COMPARTMENT

Cabin type:

- Open cabin FOPS/ROPS approved
- Enclosed cabin FOPS/ROPS approved with sliding rear window

Driver's seat and seat belt:

- Air suspended T-back seat with 3-point seat belt
- Air suspended heavy duty seat with 3-point seat belt

Seat belt safety interlock for driver:

- Warning indicator in display
- Safety brake application

Cabin door interlock switches with safety brake application

Passenger's seat:

- T-back seat with 3-point seat belt
- Heavy duty seat with 3-point seat belt
- 2 person seat with fixed lap seat belts

Throttle and brake pedal layout:

- Front and side facing pedals with seat swivel
- Front facing pedals

Gear lever side:

- On right side of the steering wheel
- On left side of the steering wheel

## MACHINE CONNECTIVITY

- Machine connectivity hardware (WLAN/3G/4G/LTE)
- Analytics license (includes connectivity hardware)

## TECHNICAL DOCUMENTATION

Standard documents:

Instruction manuals, hard copy 2 pcs:

- English
- Russian
- One of destination EU languages

Spare parts manuals, hard copy 2 pcs:

- English
- Russian

PDF manuals on USB-stick 2 pcs, includes instruction and spare parts manuals

Additional documentation:

- Extra hard copies of manuals
- Extra PDF manuals
- LinkOne WebView electronic manuals
- Other than standard language manuals

**OTHER**

Powder extinguisher:

- 6 kg
- 12 kg
- Ansul Sentry

Number of extinguishers:

- 1
- 2

Painting and taping:

- Standard painting and taping
- Painting and taping according to customer specifications

Standard support legs at the load end

Text labels in:

- En/Ru/One of destination EU-languages
- Other language

Measurements:

- Noise
- Vibration
- Emissions

## ACCESSORIES

### PROCESS PRODUCTIVITY

- Front support legs
- Fan rack, Max. diameter of fan 1100 mm, Max. length 2000 mm
- Platform tilt +/- 8° for levelling the platform
- Hydraulic pipe lifters:

Lifting capacity of pipe lifters 350 kg

Stroke length 600 mm

Pipe diameter 70 - 270 mm or pipes with a nominal value from 2½" to 10"

Reduces lifting capacity of platform 400 kg

- Crane Hiab 029:

Lifting capacity 27 kNm, 800 kg/3,4 m

Max lifting mass 995 kg with CE-approved model

Two hydraulic extensions, max reach 3,4 m

Installation on rear frame

Accessories:

- Load monitoring (mandatory for CE approval)
- Load monitoring, radio controller and controls for optional grapple
- Grapple for crane:

Pipe diameter 60 - 440 mm

Max. opening 1040 mm

Radio remote control

Rotator for grapple

Reduces max lifting capacity of crane 80 kg

Only available with CE approved crane with radio controller

- Hydraulic generator 400/230 V 50 Hz, 9.5 / 14.3 A
- 0,4 m<sup>3</sup>/min compressor with hose reel, air tank and tyre filling pistol
- 4 m<sup>3</sup>/min hydraulic driven compressor on front rack
- Compressed air inlet on carrier and air outlet with water separator in platform
- Welding kit

Includes welding generator (180 A welding current and 230V/400VAC output voltage) and welder's equipment; mask, gloves, scratch brush and slag hammer

- Toolbox on platform
- Scaling bars with rack

Bar lengths 1.8, 2.4 and 3.0 m

### CARRIER PRODUCTIVITY

- Accessories for open cabin:
  - Protective grids
  - Windshield with wipers
- Accessories for enclosed cabin:
  - Audio system
  - Air conditioning with heating
  - Heated mirrors
  - 12 V, 18 A power supply in cabin with socket and connector
  - Auto engine shutdown during idling
  - Engine shutdown delay
  - Inlet plug for jump start
  - Block heater with interior heater and battery charger 230 V (Interior heater available with enclosed cabin)
  - Block heater with interior heater, battery charger, hydraulic oil and filter heaters 400 V (Interior heater available with enclosed cabin)
  - Fuel operated pre-heater
  - Fast fuel filling system
  - Hand pump for filling of hydraulic tank
  - Fluid evacuation panel with sampling points
  - Automatic lubrication system
  - Reversing camera:
    - 1 camera, 1 display
    - 3 cameras, 2 displays
    - 1 camera, 1 display and reversing radar
    - 4 cameras, 1 display with recording support
  - Spare rim and tyre
  - Toolbox and maintenance tools
  - Interior cooling fan
  - Wax tape for electric connectors

**SAFETY**

- Cabin door puddle lights
- Extra warning LED light (From the options below it is possible to choose 1-2 combinations)
  - Color
    - Amber
    - Blue
    - Red
    - Green (n/a with rotating light pattern)
    - White (n/a with rotating light pattern)
  - Light pattern
    - Strobe
    - Rotating
- Fire extinguisher system, 3 point activation (cabin, engine end and lifting platform)
  - Dry chemical
    - Ansul A-101
      - Manual
      - Automatic, Checkfire 110
  - Liquid agent
    - Fogmaker (Automatic)
- Gear lockout:
  - Forward:
    - Highest gear locked out
    - 2 highest gears locked out
  - Reverse:
    - Highest gear locked out
    - 2 highest gears locked out
- Engine end safety rails and ladder
- Front and rear grounding straps
  - Flat cable
  - Chain
- Pump for brake release
  - Electric pump
  - Hand pump
- Redundant brake monitoring system
- Hydraulic pressure monitoring kit
- Methane monitoring system
- Protection guards for tunnel curtains
- Tyre pressure indicators
- Additional wide angle mirrors (n/a with heated mirrors)
- Warning triangles
- Flashlight with charger
- Hearing protectors
- Wheel chocks with brackets

## SERVICES

### NORMET SERVICES

Our services cover the whole life cycle of your equipment. They include start-up and commissioning, genuine spare parts, upgrades & modifications, and remanufacturing, as well as rental and leasing offerings, and field services. We also offer improvement services such as operator training and process audits.

### SPARE PARTS

Genuine parts from Normet Services ensure that you always have the highest quality parts available to keep your equipment up and running. Depending on your needs, we can offer everything from individual parts to complete parts contracts, and our professionals around the world have the experience to ensure that you have the parts you need when you need them.

#### Initial spare parts package:

Available for 1000h of use\*. Includes periodical service, most common wearing parts and most critical safety parts.

#### Spare parts packages made for customer needs:

Available based on hours of use\*. Includes periodical service, most common wearing parts and most critical safety parts.

\* Recommendations are based on average hours – can vary a lot depending on work site conditions.

### UPGRADES AND MODIFICATIONS

Our Upgrades and Modifications services are designed to ensure the economical, efficient and purposeful performance of your equipment over its entire life cycle. A service provided by a reliable OEM like Normet ensures the safety and performance of your equipment. Normet Upgrades and Modifications save you both time and money, while delivering the high quality you expect from us.

### SERVICE CONTRACTS

With a service agreement, Normet manages your fleet with guaranteed availability and agreed costs, giving you transparency for your life cycle costs, annual operational budget and fleet uptime. This lets you focus on your core operations. Each service agreement is built and customized to meet the individual customer's needs from our portfolio of services. Depending on the level of service agreement you need, you can choose anything from basic technical support for an individual machine all the way up to services for your entire fleet, as well as process performance. The service levels we offer are:

- Parts Availability
- Fleet Support
- Fleet Availability
- Process Performance

The content of a service level can be tailored to meet your particular requirements.

### TRAINING SERVICE

Our Training Services are available for you and your operators throughout the equipment lifecycle and they include:

				
	Operation & Maintenance	Spraying	Charging	Scaling
ADVANCED	Advanced fault diagnostics & troubleshooting	Concrete chemicals, testing and preparing for EFNARC-certificate test		
INTERMEDIATE	Troubleshooting training Foundations of electrics, hydraulics and mechanics NorSmart	Advanced training in concrete spraying Economics of concrete spraying	Advanced training in explosives Economics of charging	Advanced training in scaling Economics of scaling
BASIC	Operation and Maintenance Training Basic Product Training	Basic understanding of concrete spraying	Basic understanding of charging	Basic understanding of scaling
LEVEL	SERVICE	PROCESS KNOWLEDGE		



# START-UP AND COMMISSIONING

## 1. OPERATOR TRAINING

	Start-up training	Commissioning
<b>1.1 Classroom training</b>		
General introduction and operation of machine	Basic	No classroom training included in commissioning
Safety instructions	Basic	
Use of manuals	Basic	
Technical introduction of equipment	Basic	
Hands-on service and pre-operation checks	Basic	
Controls and driving (starting, driving, stopping, parking)	Basic	
<b>1.2 Practical training</b>		
Pre-operation checks	Basic	Introduction
Driving, starting, stopping, parking	Basic	Introduction
Preparing the machine for specific operation conditions	Basic	Not covered
Operation	Basic	Introduction
Washing the machine	Basic	Introduction
Troubleshooting	Basic	Basic


## 2. MAINTENANCE AND REPAIR TRAINING

General operation of machines	Basic	Introduction
Symbols of drawings and codes	Basic	Not covered
Understanding hydraulic and electric schematics	Basic	Introduction
Control systems	Basic	Introduction
Function of main components (depending on equipment)	Basic	Introduction
Locations of components in the machine	Basic	Not covered
Periodical maintenance	Basic	Introduction
Troubleshooting	Basic	Not covered
Use of manuals	Basic	Introduction
Connection of hydraulic and electrical equipment	Basic	Not covered


## DIMENSIONS

Length	8460 mm	Ground clearance as shown	330 mm
Width	2000 mm	Turning radius outer	6500 mm
Height	2360 mm	Turning radius inner	3960 mm
Height of cabin	2250 mm	Turning radius outer (with front rack)	6620 mm
Wheel base	3650 mm	Turning radius inner (with front rack)	3960 mm
Track	1670 mm		

### SIDE VIEW – BASIC MACHINE

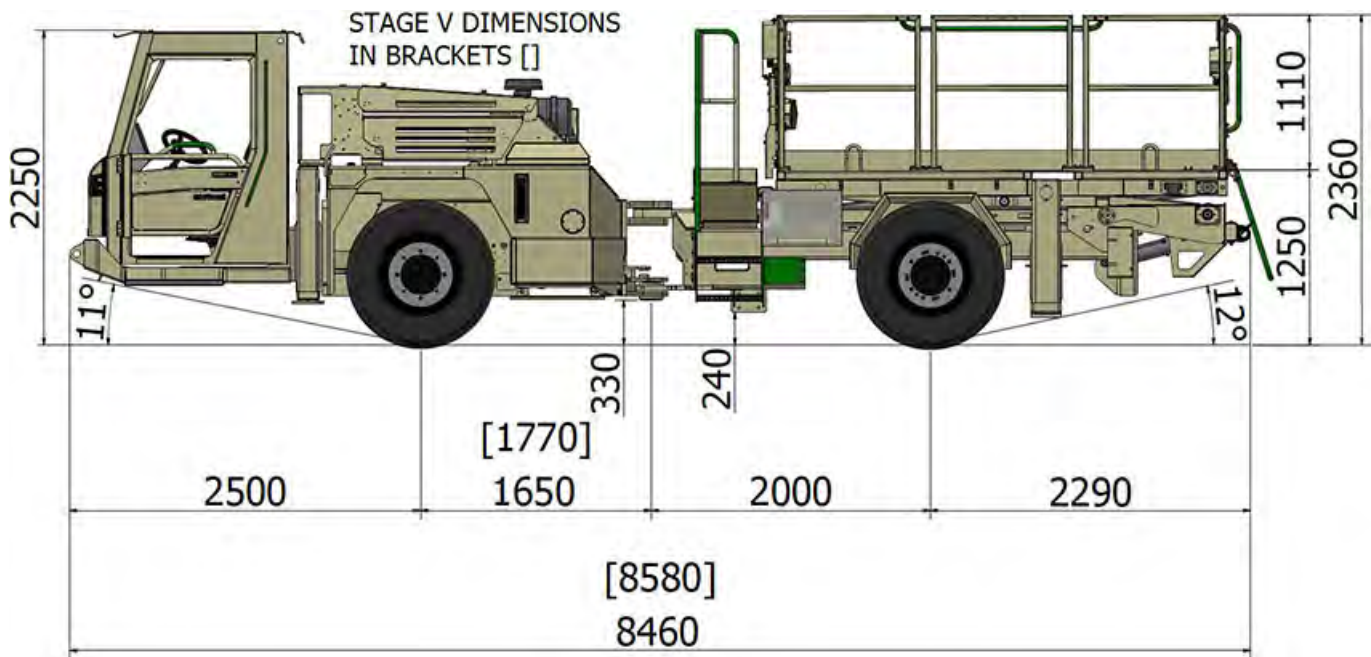

### SIDE VIEW – MACHINE WITH OPTIONS

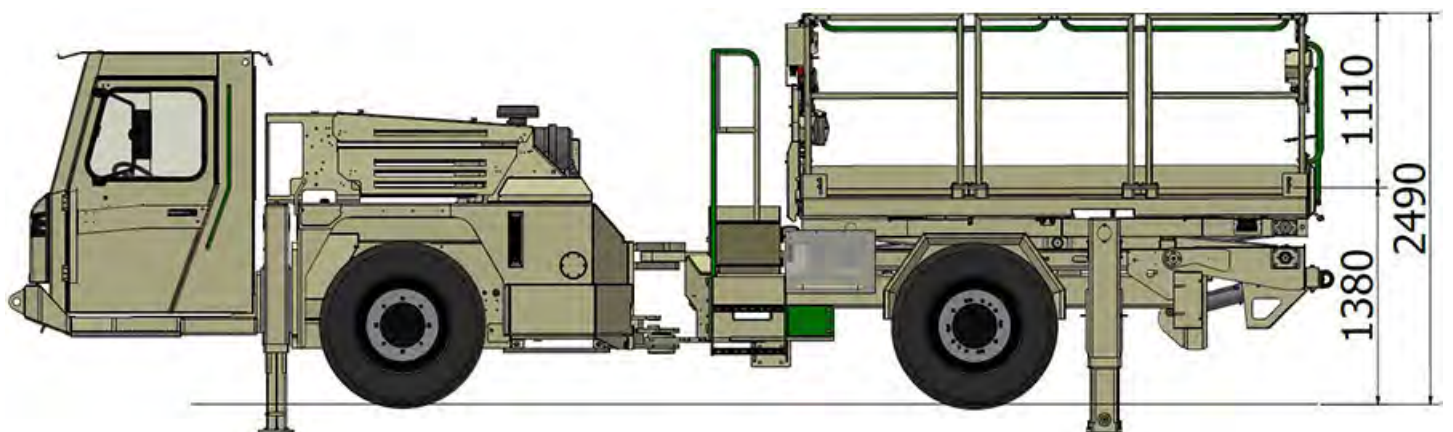


Normet reserves the right to change this specification without further notice


Pictures may include options and additional equipment.

## SIDE VIEW – MACHINE WITH PIPE LIFTERS

### DIMENSIONS WITH EXTENDED PLATFORM IN BRACKETS []

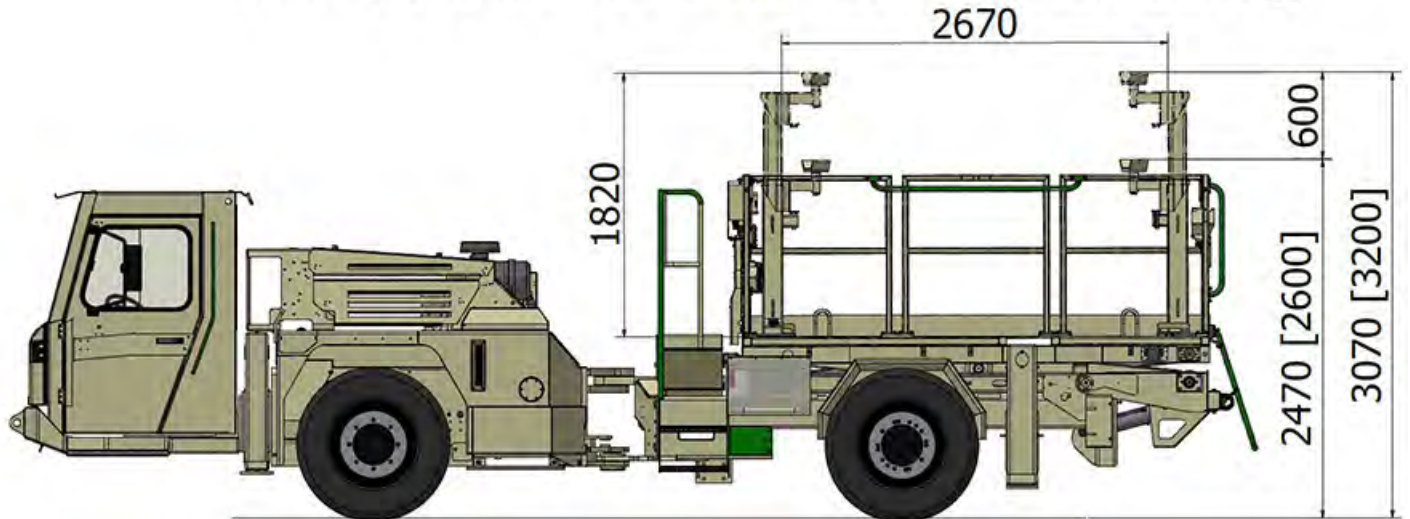


## SIDE VIEW – BASIC PLATFORM WITH CRANE

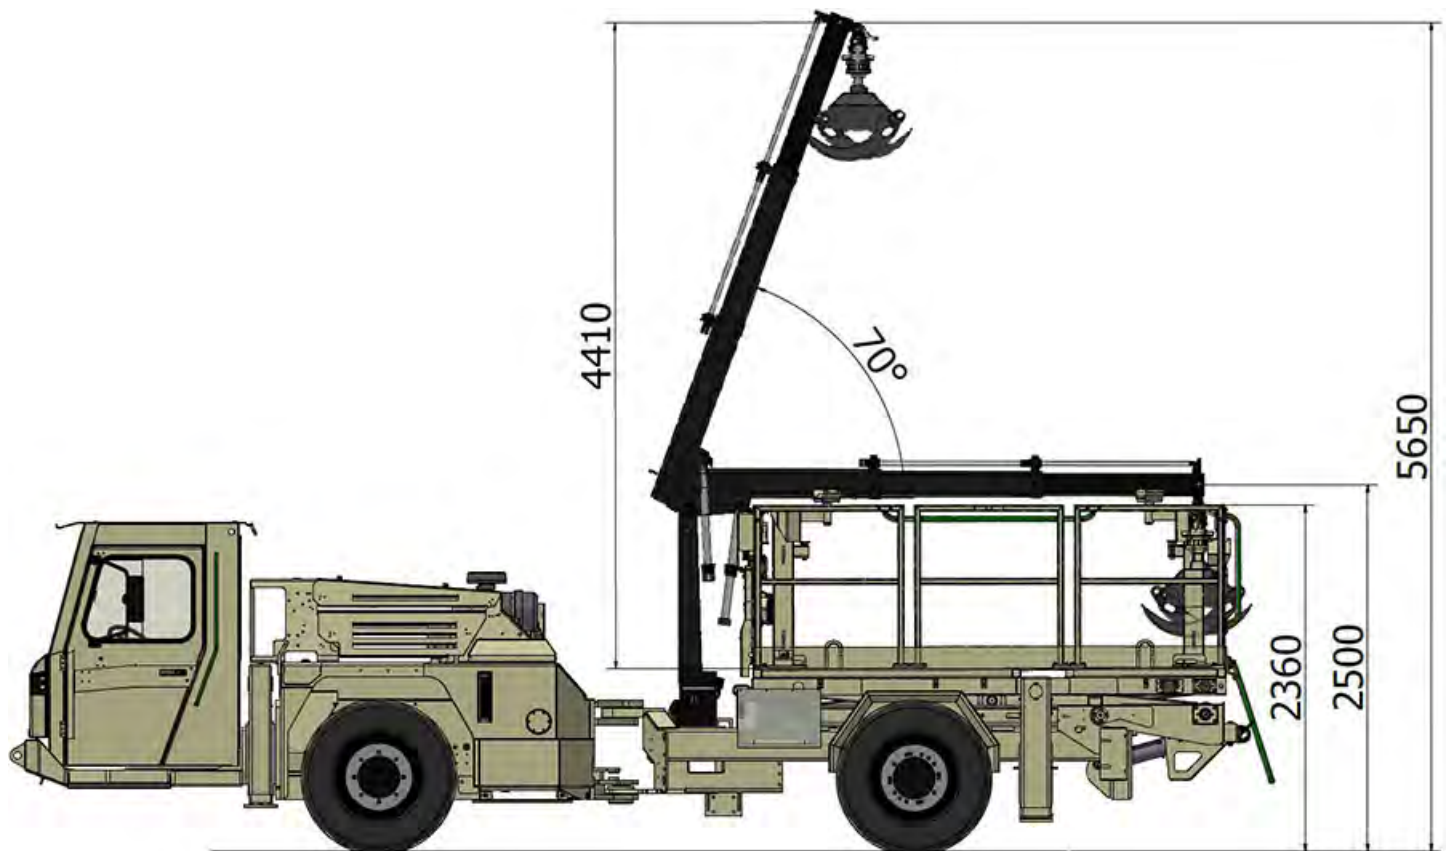


Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


## SIDE VIEW – EXTENDED PLATFORM WITH CRANE

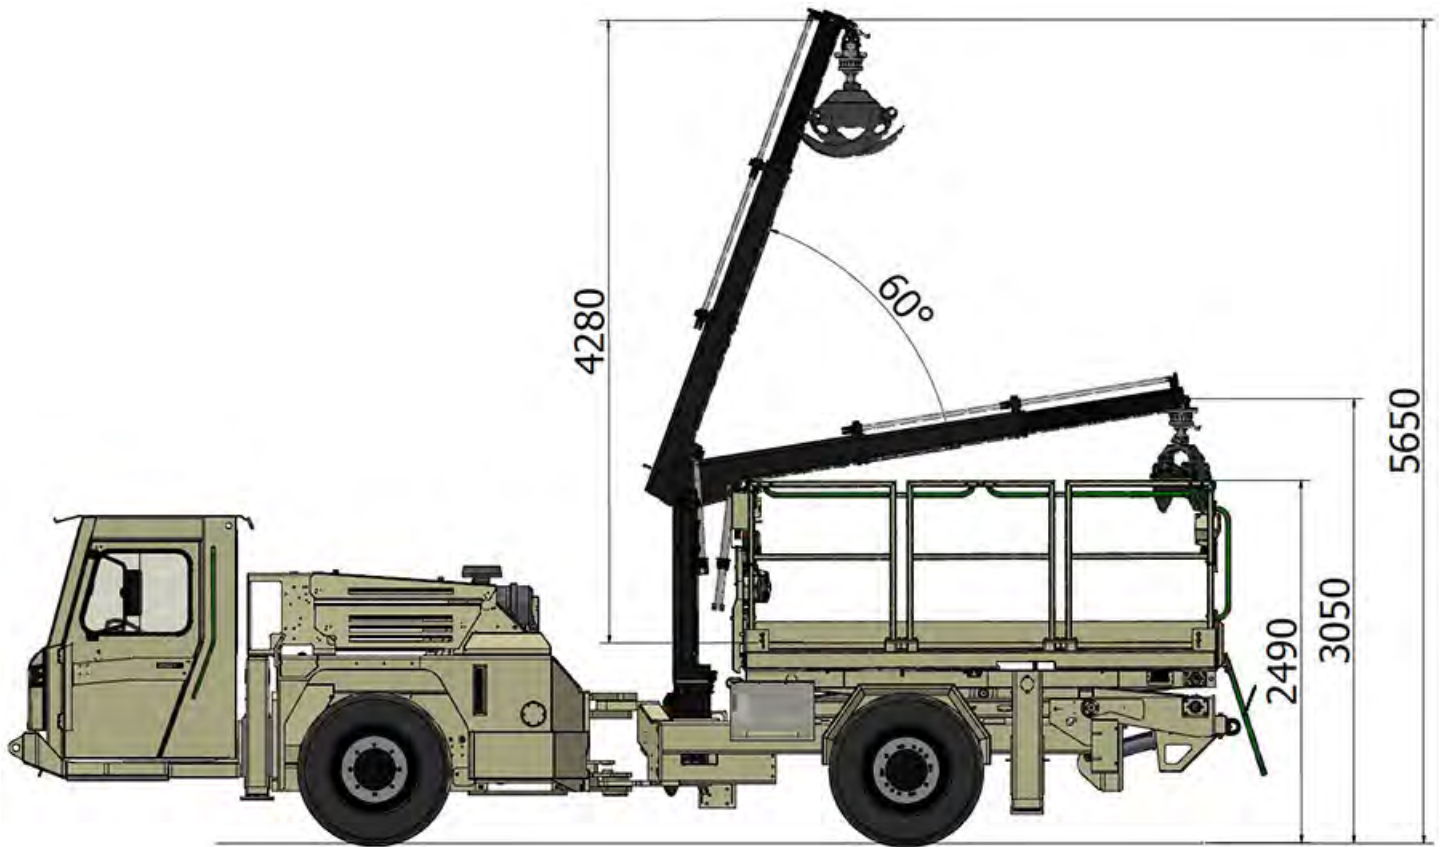

## SIDE VIEW – MACHINE WITH ALL OPTIONS

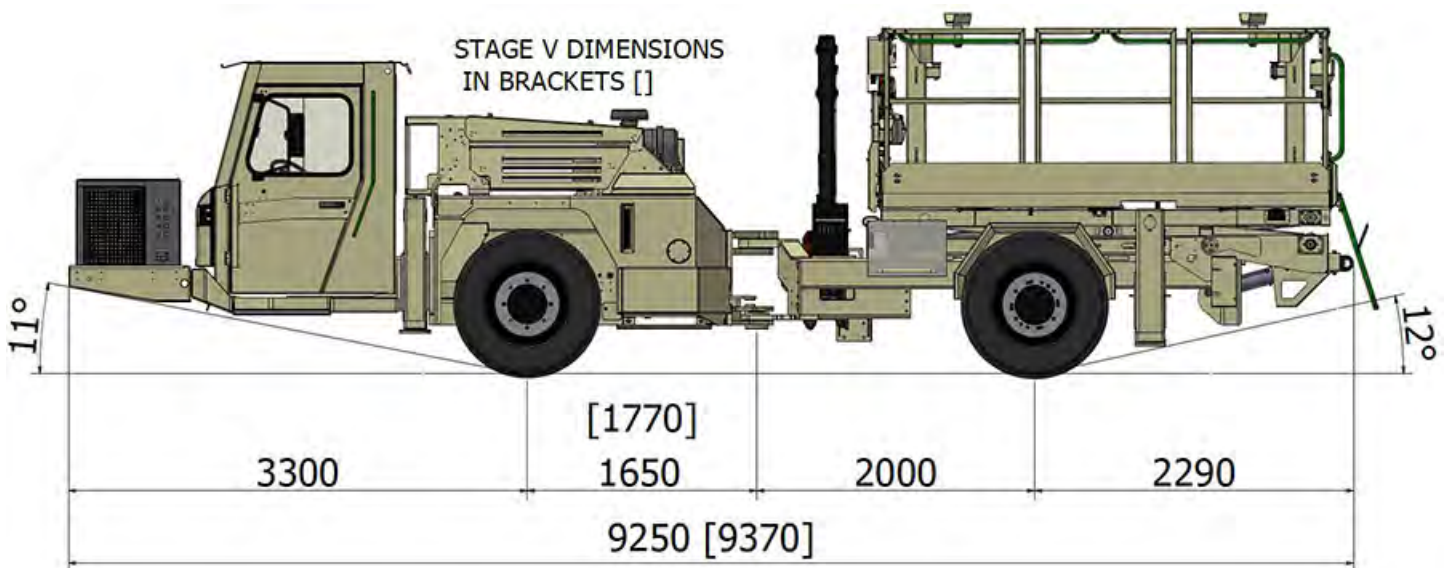


## SIDE VIEW – LIFTED PLATFORM

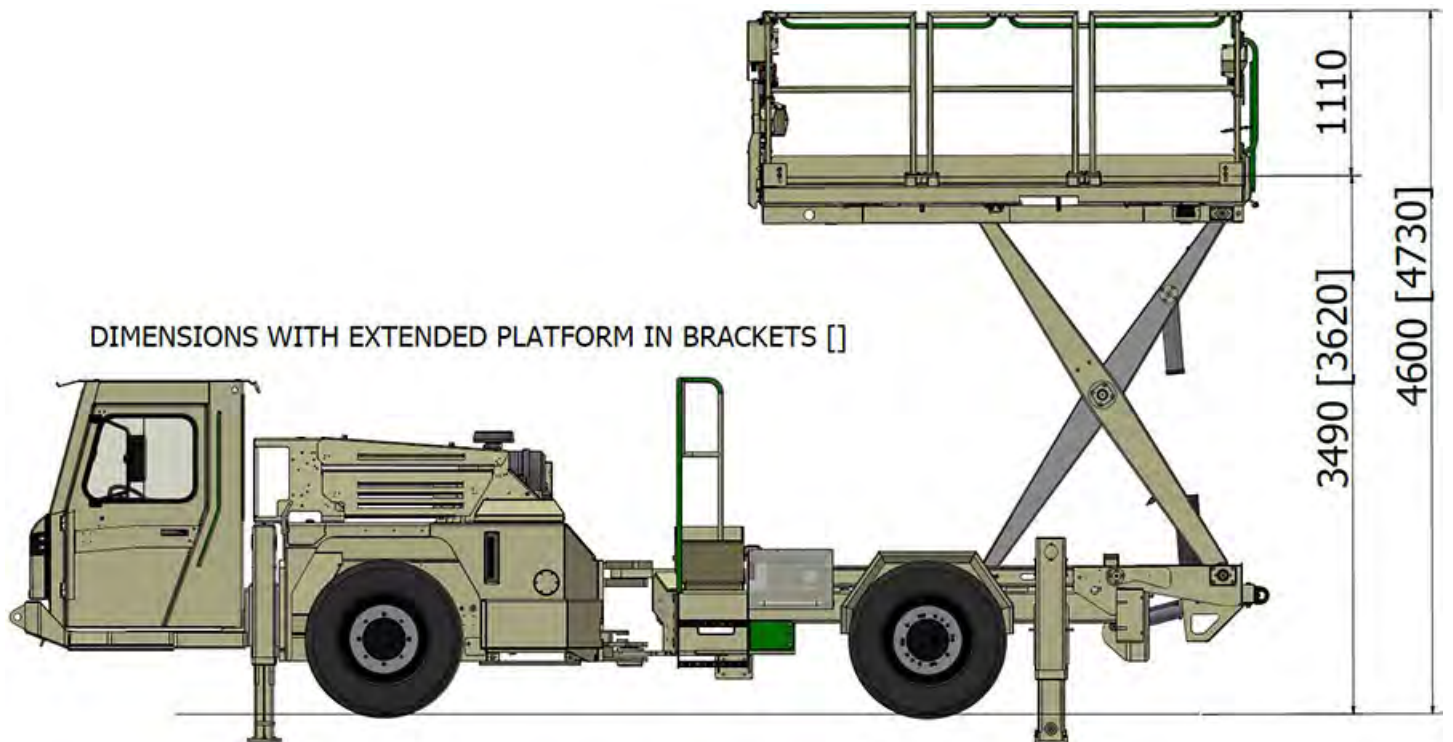


**SIDE VIEW – LIFTED PLATFORM WITH PIPE LIFTERS**


**DIMENSIONS WITH EXTENDED PLATFORM IN BRACKETS [ ]**

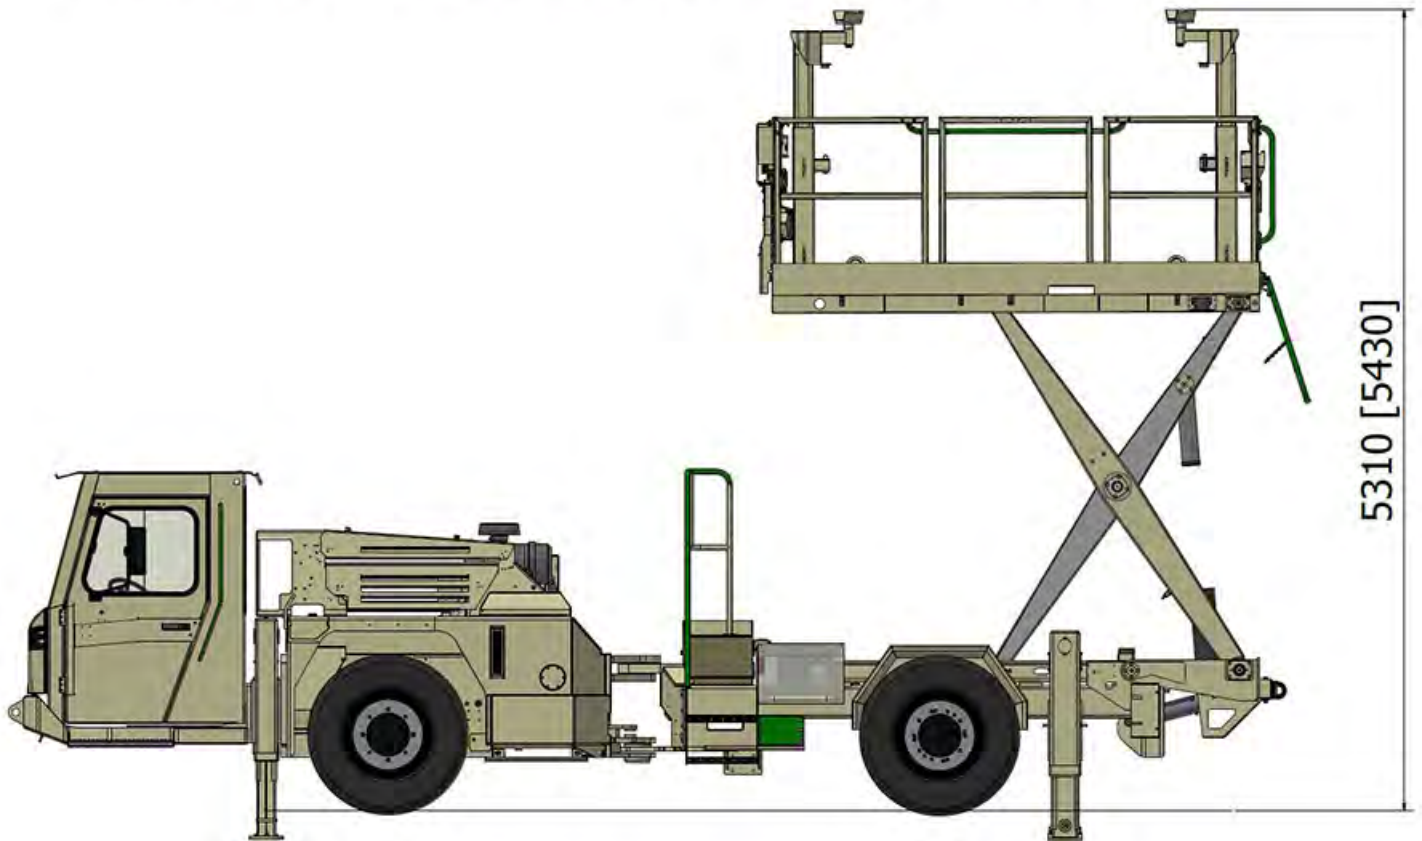


## TURNING RADIUS

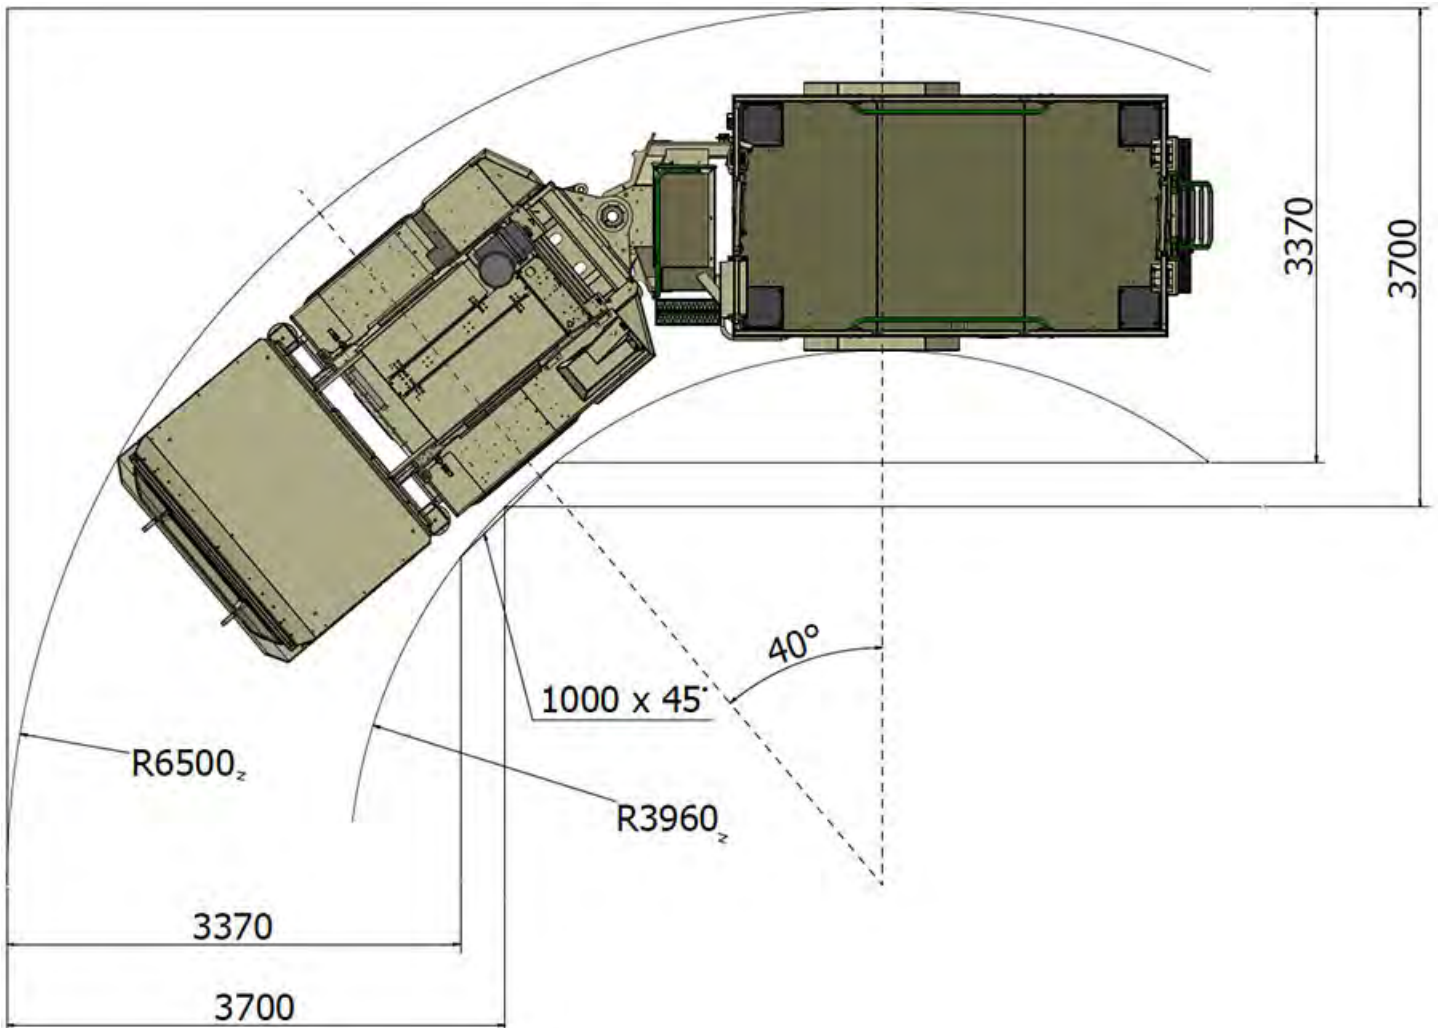

## TURNING RADIUS - WITH FRONT RACK

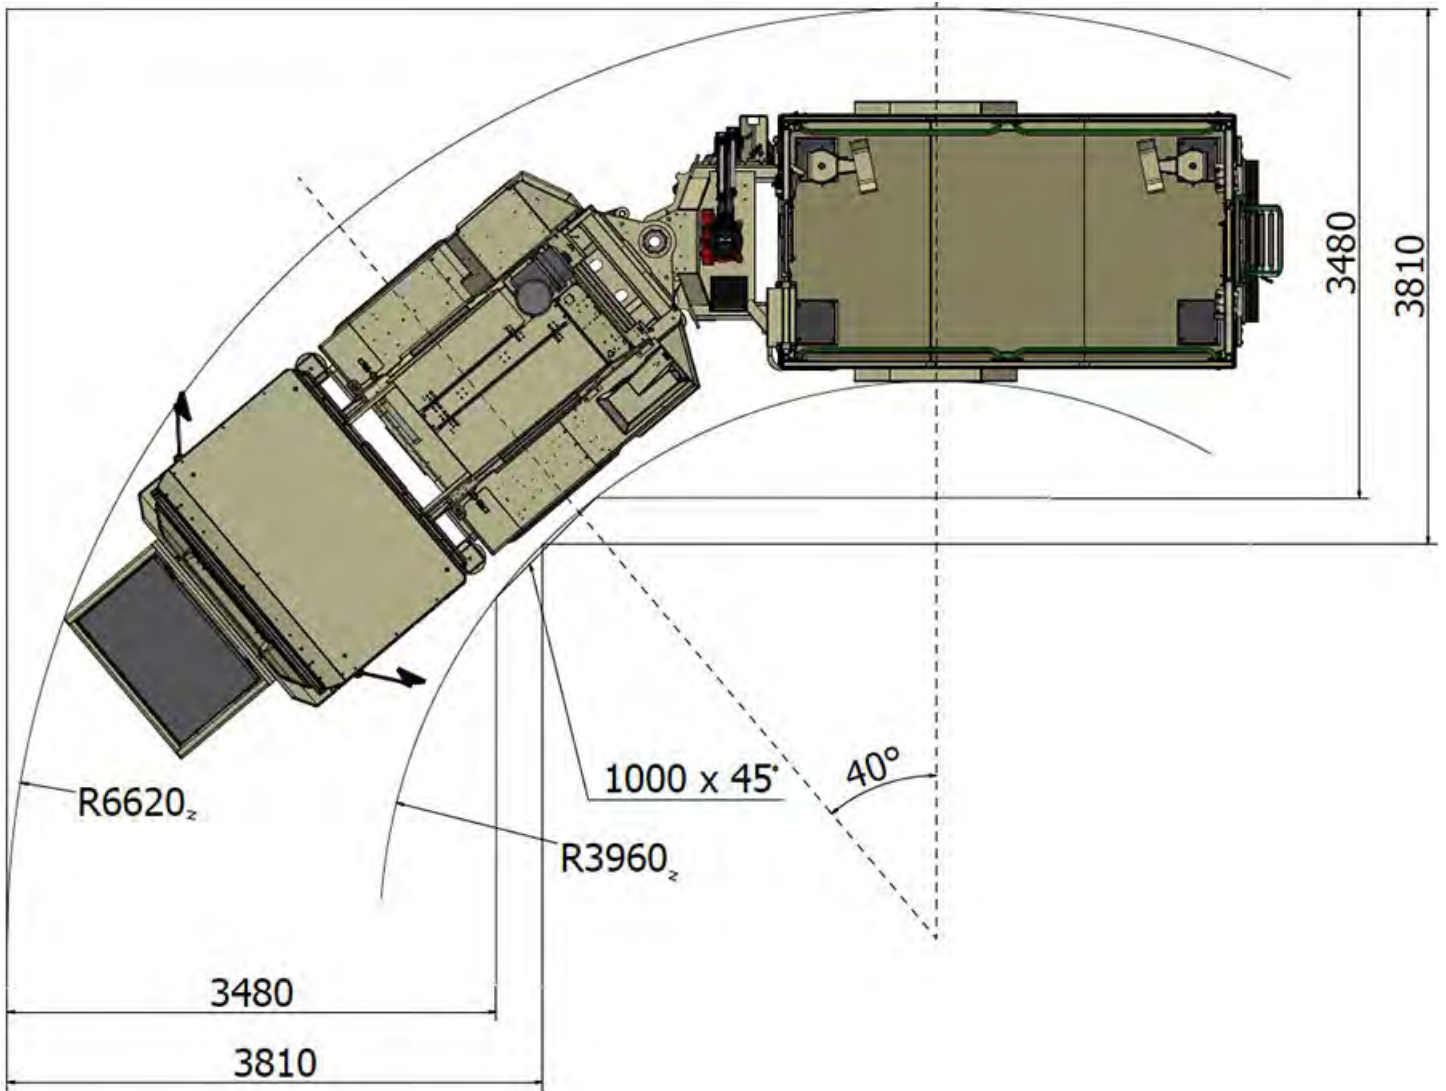

## TOP VIEW

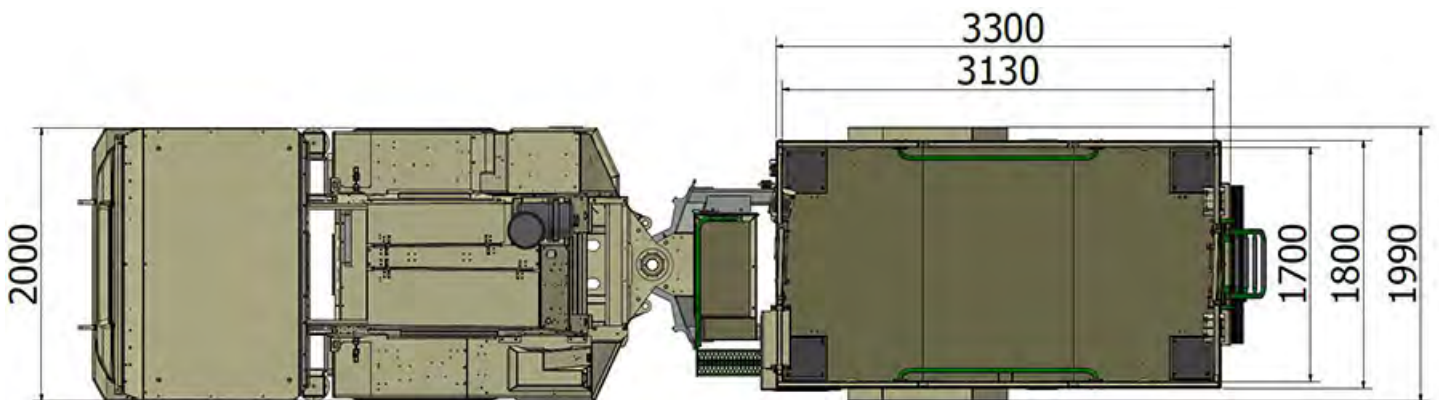


Normet reserves the right to change this specification without further notice


Pictures may include options and additional equipment.




## TOP VIEW - EXTENDED PLATFORM

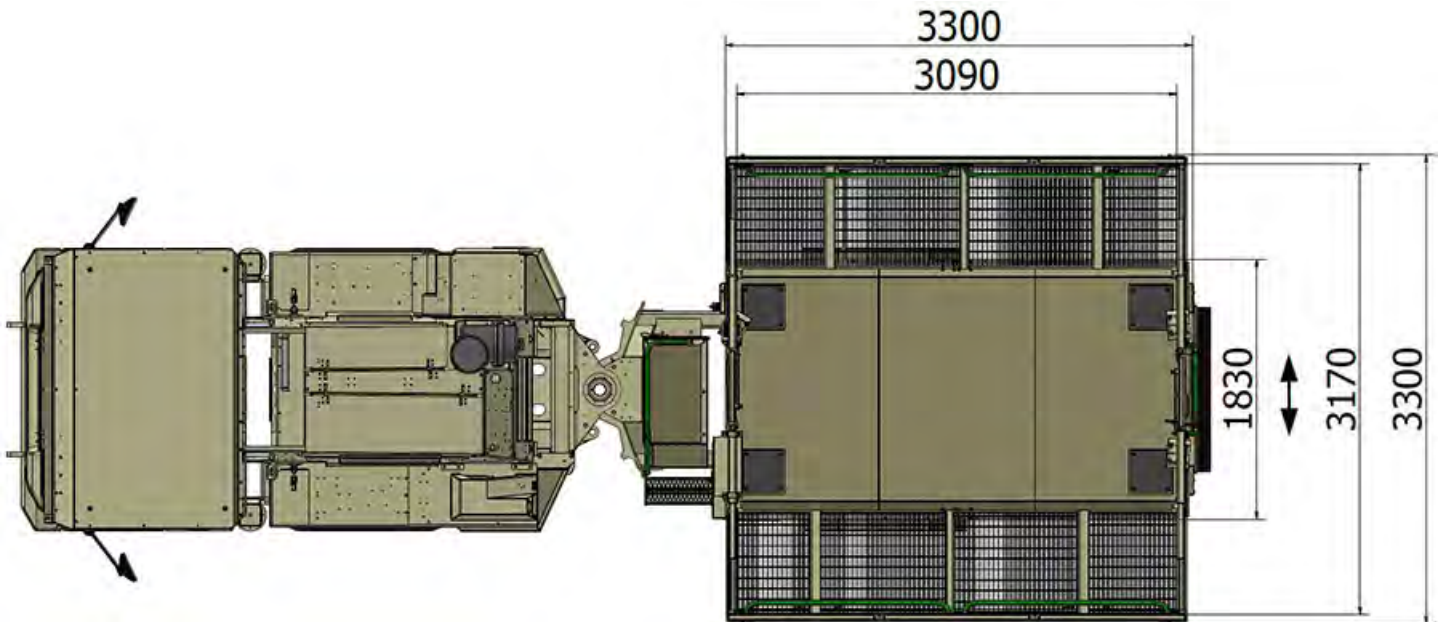


## TOP VIEW - CRANE REACH

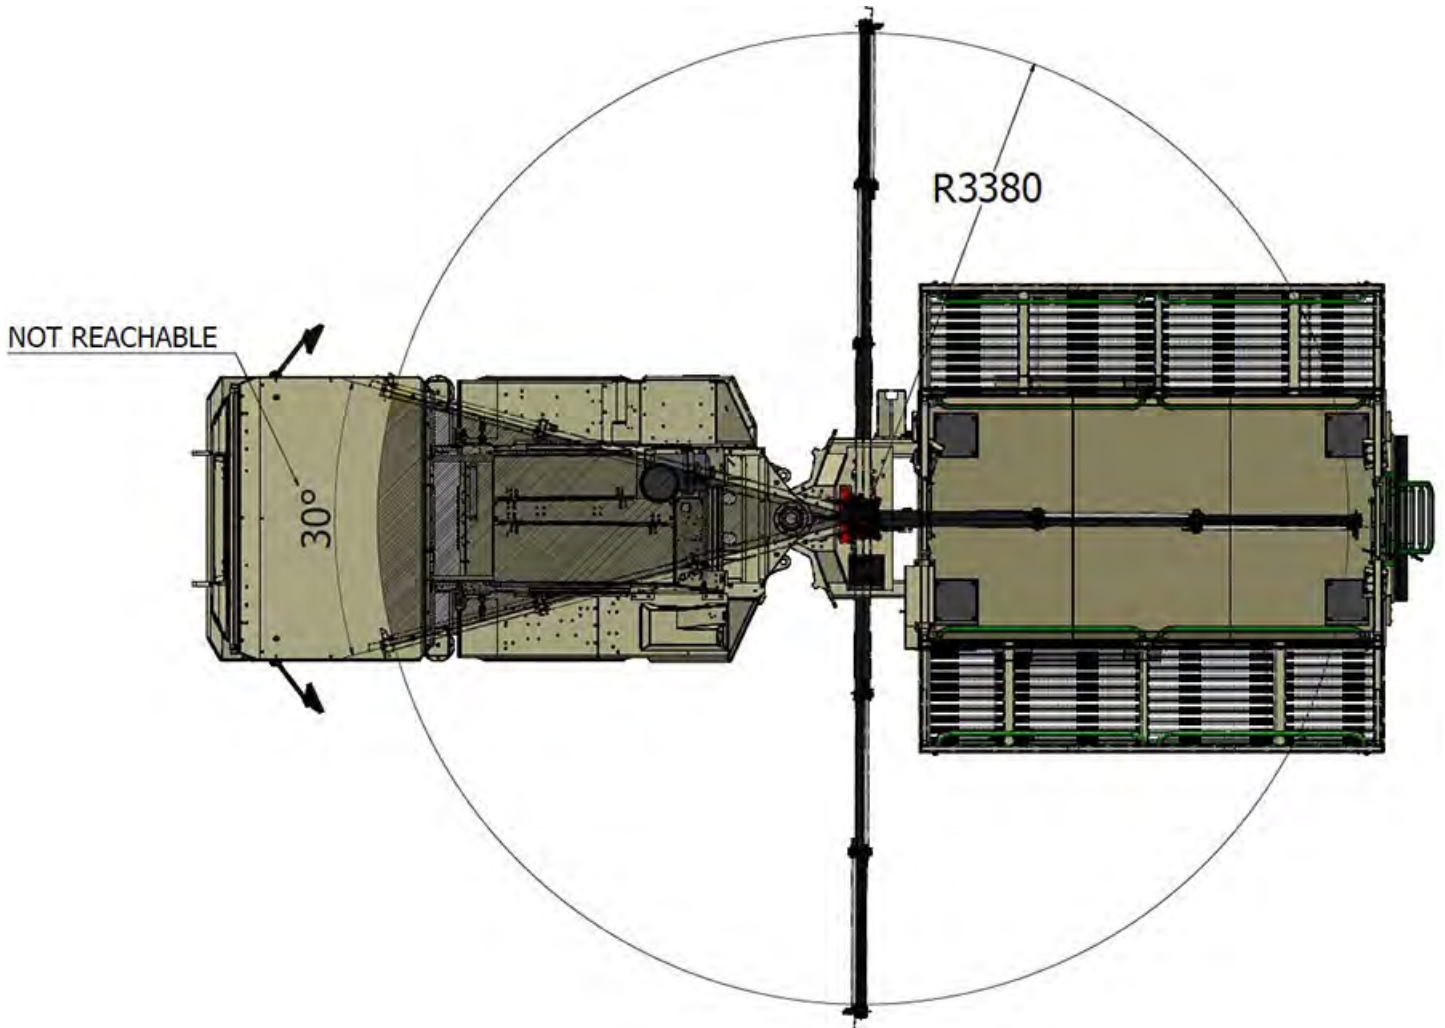

## FRONT VIEW

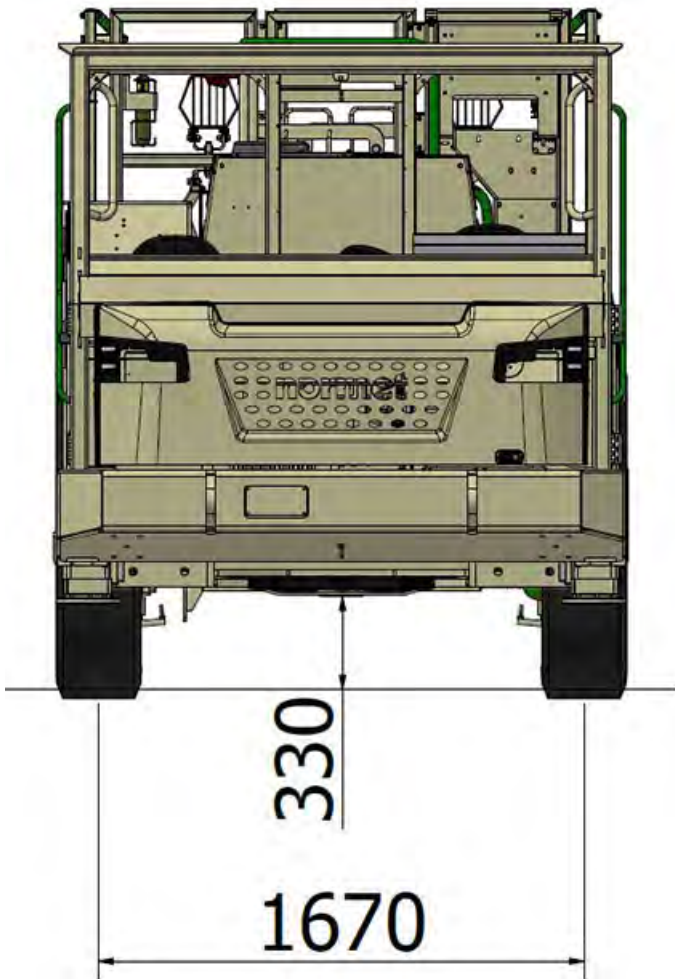


## BACK VIEW - CRANE REACH

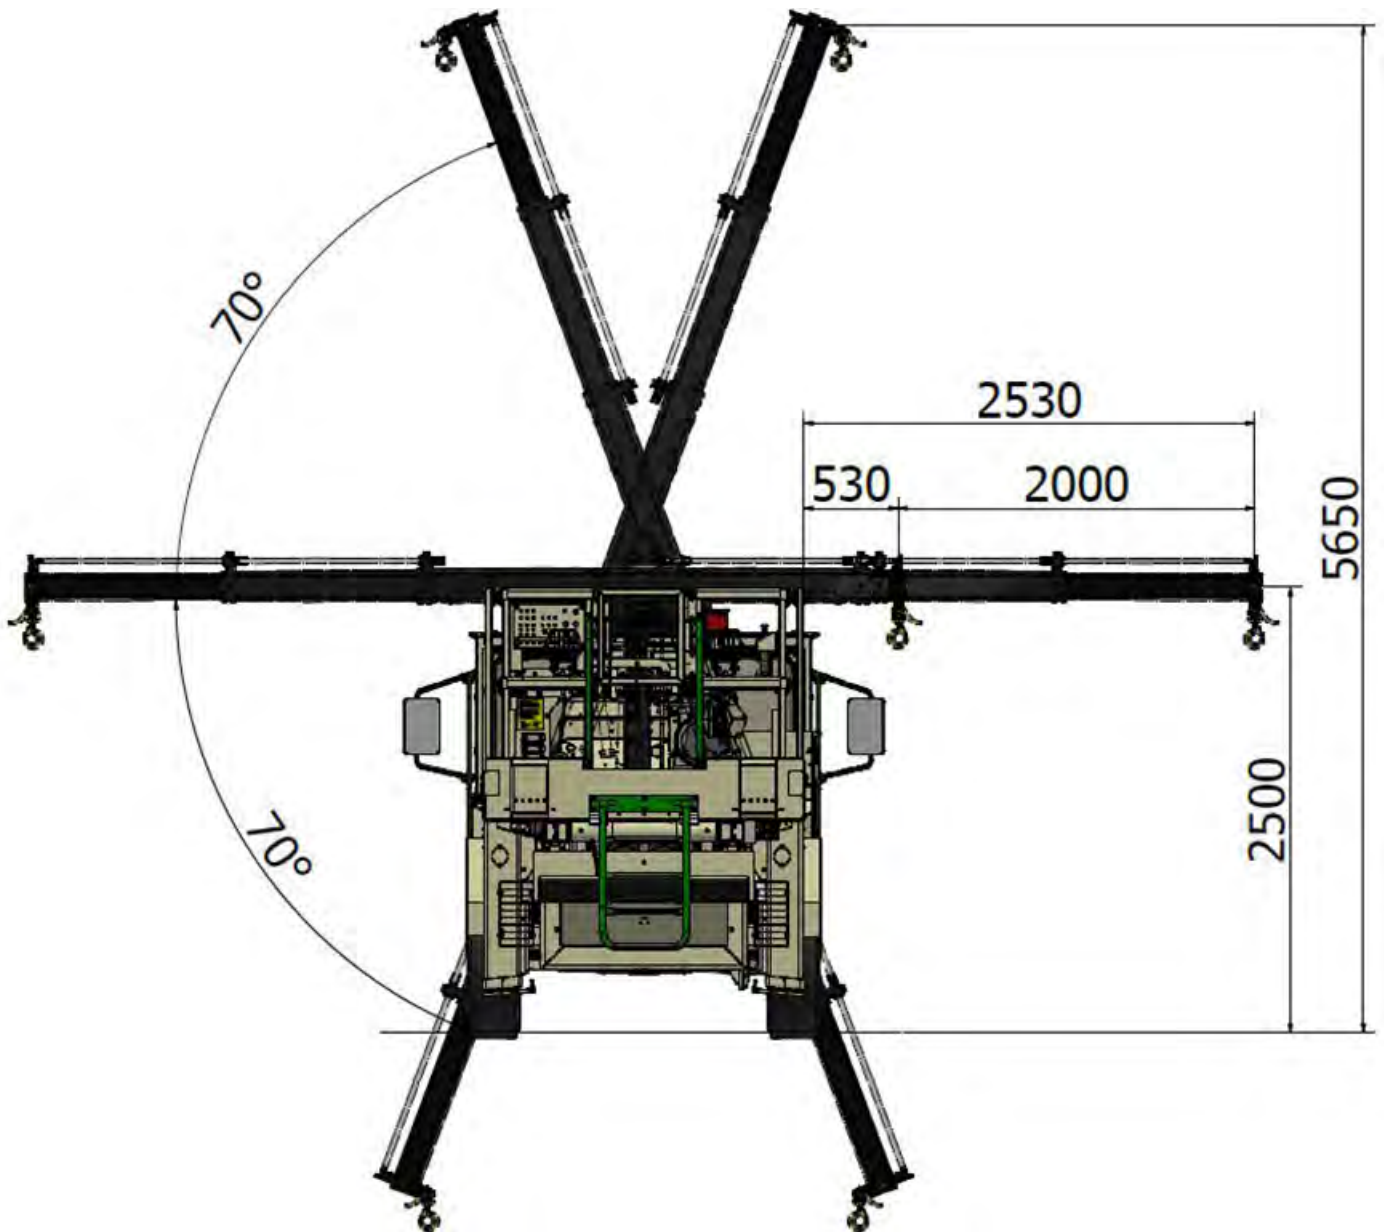

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

## BOOM REACH, HIAB 029

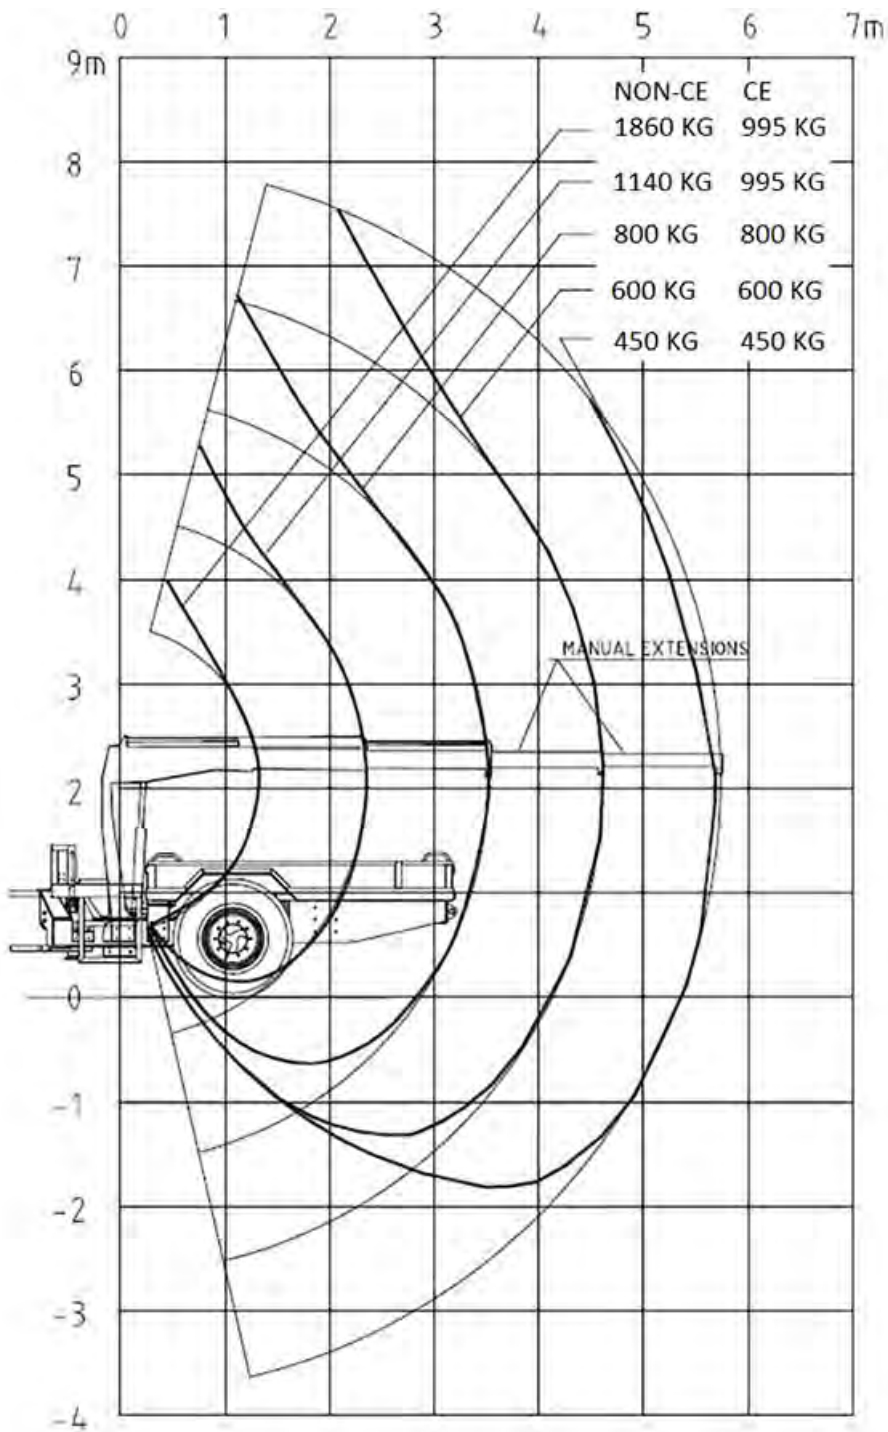

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

## TRACTIVE EFFORTS

### OPERATING WEIGHT


Basic machine

12 600 kg


### DEUTZ TCD 2013 L4, 120 KW

Performance curve DOC060005


#### Conversion chart

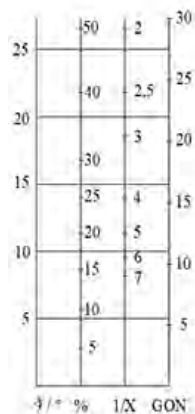

#### Gradeability kN

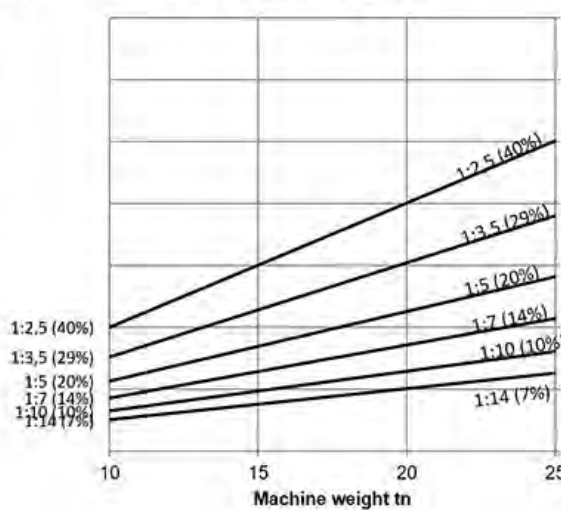


#### Tractive effort kN

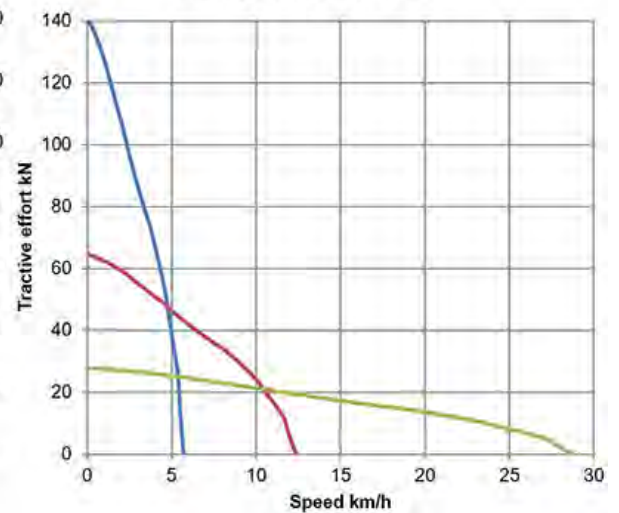


### MERCEDES-BENZ OM 904 LA 110 KW

Performance curve with lock-up 100006272


#### CONVERSION CHART

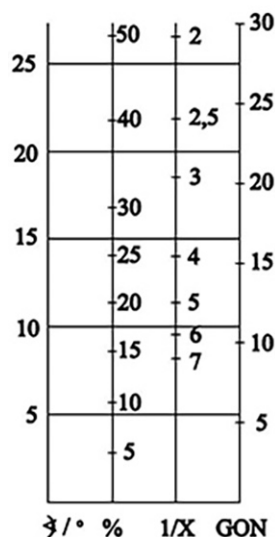

#### GRADIENT

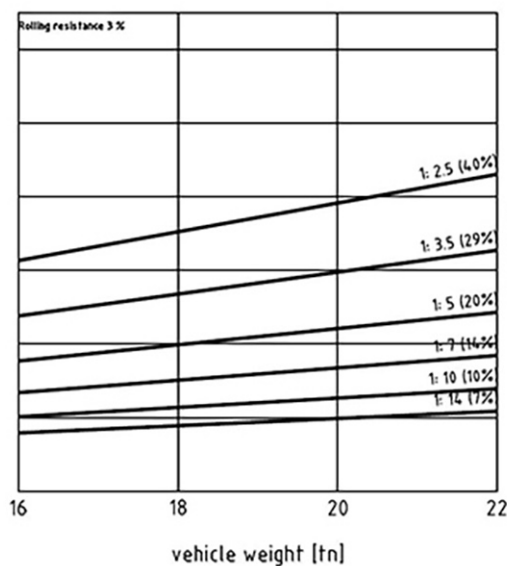

#### TRACTIVE EFFORT

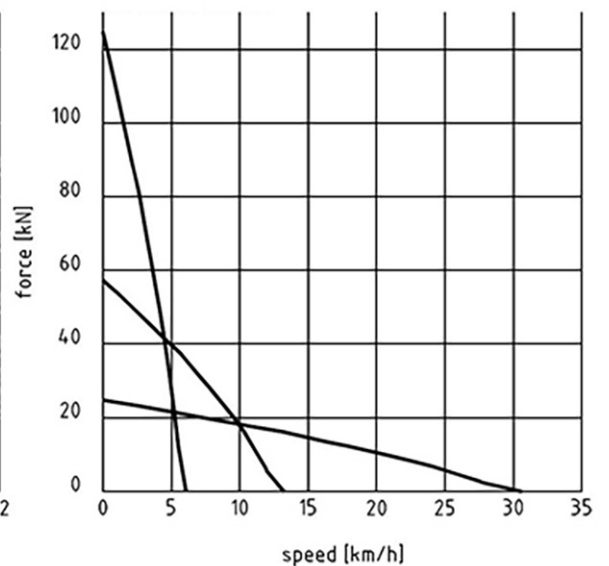


Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


## CUMMINS B 4.5 121 KW

Performance curve with lock-up DOC028557

### Conversion chart

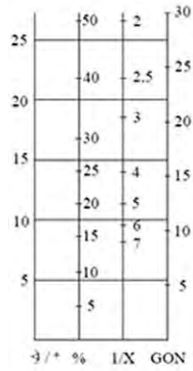

### Gradeability kN

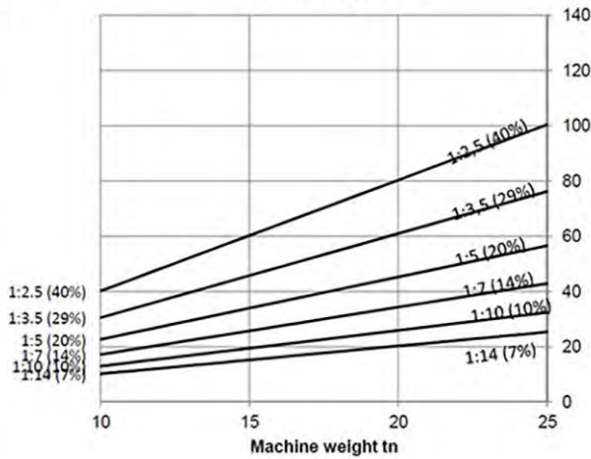

### Tractive effort kN

