

normet XROCK®

XG15D


Normet Xrock Grapples are built to excel in both demolition and material handling under the harsh conditions. With high-quality Hardox steel and an innovative two-hydraulic motor rotator design, our grapples are crafted for tough work and long hours.

Double rotation motors

Two hydraulic motors share the load in the rotation system, reducing strain and extending the gear ring's lifespan.

Two robust jaws

The jaws move simultaneously and make both demolition and material handling tasks effortless.

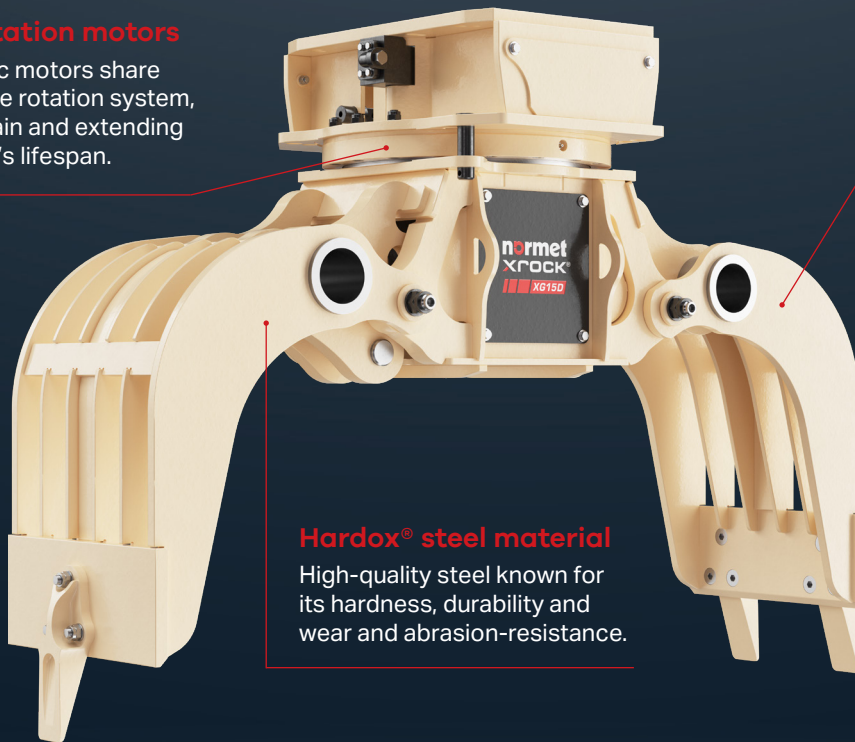

Hardox® steel material

High-quality steel known for its hardness, durability and wear and abrasion-resistance.

Combined with Xrock Xquick quick couplers

you can change between the grapple and breaker within seconds and get the work done fast.



SPECIFICATION

Normet Breaker Boom model	Lifting force with Quick Coupler and Grapple, kg	Lifting force with Grapple (without Quick Coupler), kg
X46-480	2 316 (5 106 lb)	3 006 (6 626 lb)
X46-590	1 398 (3 082 lb)	2 088 (4 603 lb)
X46-670	685 (1 510 lb)	1 375 (3 031 lb)
X86-550	2 374 (5 234 lb)	2 904 (6 403 lb)
X86-640	845 (1 863 lb)	1 375 (3 031 lb)
X86-790	845 (1 863 lb)	1 375 (3 031 lb)
X66-980	2 788 (6 146 lb)	3 413 (7 525 lb)
X66-1050	2 075 (4 575 lb)	2 700 (5 952 lb)
X66-1220	953 (2 101 lb)	1 578 (3 479 lb)
X66-1410	699 (1 541 lb)	1 324 (2 919 lb)
X68-900R	4 626 (10 199 lb)	5 146 (11 346 lb)
X68-1050R	2 995 (6 603 lb)	3 515 (7 749 lb)
X68-1150R	2 995 (6 603 lb)	3 515 (7 749 lb)
X68-1250R	2 282 (5 031 lb)	2 802 (6 177 lb)
X68-1450R	1 160 (2 557 lb)	1 680 (3 704 lb)
X68-1550R	508 (1 120 lb)	1 028 (2 266 lb)
X88-540R	743 (1 638 lb)	1 273 (2 806 lb)
X88-650R	743 (1 638 lb)	1 273 (2 806 lb)