

# X22 SERIES

The Normet Xrock X22-series offers breaker booms designed for tight spaced operations in stationary and mobile applications. Featuring a light and compact design, they offer a minimal footprint and maximized cost-efficiency.

### Compact footprint

provides stable connections, thriving seamlessly in confined environments.

### Robust, lightweight steel plate design

for excellent maneuverability in narrow workspaces.


### Maintenance-free cylinder red bearings

ensure continuous operation and extended service life with cost savings.



### SPECIFICATION

	X22-290R	X22-320	X22-350
Maximum reach (incl. nominal breaker), m (ft)	4.3 (14.1)	4.8 (15.7)	5.2 (17.0)
Horizontal reach, max (breaker vertical), m (ft)	2.9 (9.5)	3.1 (10.2)	3.5 (11.5)
Vertical reach, max (incl. nominal breaker), m (ft)	2.2 (7.2)	3.3 (10.8)	4.1 (13.4)
Recommended breaker weight, kg (lb)	200 - 400 (440 - 880)	300 - 500 (660 - 1100)	300 - 500 (660 - 1100)
Operating mass, without breaker, kg (lb)	1 150 (2 535)	1 355 (2 987)	1 400 (3 087)

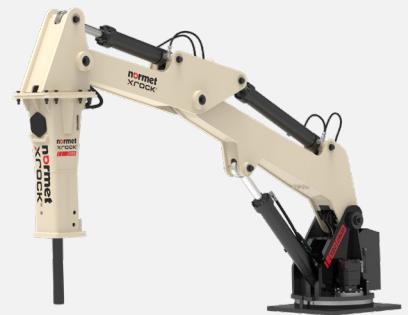

X22-290R breaker boom includes 360-degree pedestal for extreme flexibility and precision within the whole operating area.

## POWER UNITS

Normet Xrock power units offer streamlined power to maximize boom and breaker performance. Our power units are delivered fully assembled and rigorously tested, ensuring immediate readiness for deployment. The power unit system is ready for use by simply connecting it to the boom and providing the necessary power supply. Integrated drip tray is always included in our power units and their accessible service points allow effortless maintenance.



### SPECIFICATION

	PU18-43
Weight without oil, kg (lb)	800 (1 764)
Oil tank volume, l (gal)	250 (66)
Oil flow, l/min (gal/min) 1500 rpm (50 Hz)	65 (17)
Oil flow, l/min (gal/min) 1800 rpm (60 Hz)	78 (20)

## ACCESSORIES

### Wireless Remote Control

The wireless and lightweight, our handheld remote control enables flexible operations from a secure and remote location.

### Automatic lubrication system

The automatic lubrication system improves uptime and safety by reducing the necessity for potentially hazardous boom maintenance procedures.

### Automatic breaker lubrication system

The automatic breaker lubrication system enhances the operational lifespan of breakers and ensures peak equipment performance over an extended period.

## COMPATIBLE BREAKERS

To optimize productivity, extend equipment lifespan, and maximize usability, complement your Normet Xrock booms with perfectly compatible Normet Xrock hydraulic breakers. The thoughtfully curated features of Normet Xrock breakers, paired with our agile and maneuverable booms, guarantee efficient task completion while maintaining cost-effectiveness in your operations.



### SPECIFICATION

	XB5	XB6
Operating weight, kg (lb)	335 (738)	450 (992)
Oil flow, l/min (gal/min)	25 - 60 (6.6 - 15.8)	45 - 100 (11.8 - 26.4)
Impact rate (bpm)	450 - 1 000	500 - 1 050
Operating pressure, bar (psi)	110 - 120 (1 595 - 1 740)	110 - 120 (1 595 - 1 740)
Tool diameter, mm (in)	70 (2.7)	75 (2.9)
Noise level (dB)	125	127
Excavator weight, t (lb)	4 - 8 (1 7636 - 3 0864)	5 - 10 (11 023 - 22 046)