

C350 Lube

C350 LUBE

TECHNICAL SPECIFICATION

Maximum amount of separate sections four

Primary capacity:

- 1 x 2000 l & 1 x 1000 l separately
- 1 x 2500 l & 1 x 500 l separately
- 1 x 3000 l (combined 2000 l + 1000 l)

Additional tanks (pick one):

- 1 x 500 l
- 2 x 250 l
- 2 x 500 l
- 1 x 500 l + 2 x 250 l

Pump type:

- Pneumatic
- Hydraulic

Greasing system:

- Pneumatic 18 kg
- Hydraulic 50 kg

Work lights

6 kg hand held extinguisher


ACCESSORIES

- Hydraulic driven compressor for pneumatic lube pumps
- AdBlue filling system with pneumatic pump and 500 l tank (replaces one lube pump)
- Waste oil system with pneumatic pump and 500 l tank
- Protection around tank system made from profile steel

DIMENSIONS

Length	3740 mm
Width	1800 mm
Height	1440 mm
Height with SF 060 / MF 100	2100 mm / 2200 mm
Weight (empty)	1700 kg

DIMENSIONAL DRAWINGS

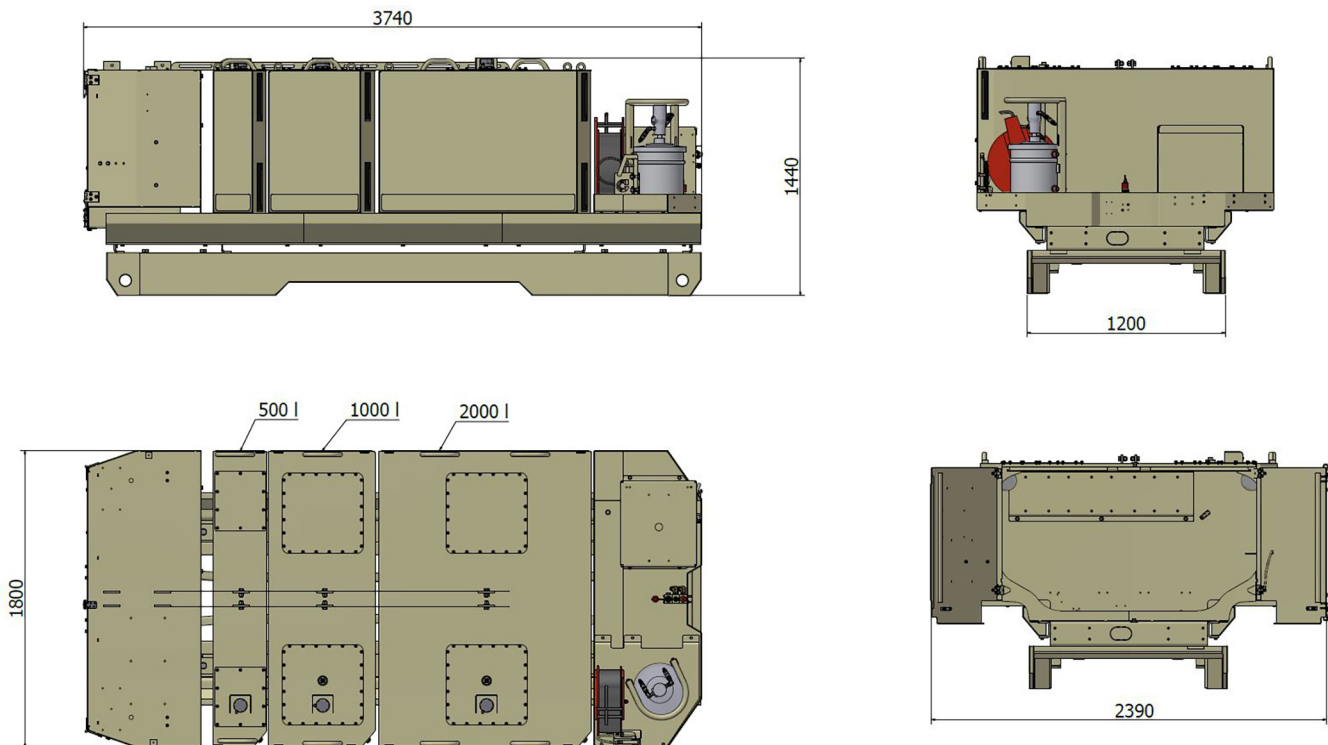

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.