

Breaker Boom X42-Series



Normet reserves the right to change
this specification without further notice

Pictures may include options and additional equipment.

INTRODUCTION

Xrock X42-Series of breaker boom is a wide reach boom and suitable for multiple applications with small footprint for installation. The boom controls and range of motion ensures a flexible positioning of the pedestal in crushing plants. The boom structure is a robust steel plate design able to carry loads in harsh environments. The X42-Series consists of six different models from 4 m horizontal reach up to 6.1 m.

Xrock X42-Series booms are designed to carry hydraulic breakers from 400 kg to 1000 kg and especially tailored for Normet Xrock XB breakers. The system is powered by Normet Xrock Hydraulic power units which are streamlined to fit for the Normet Xrock breaker and the boom.

CYLINDER SLEW WITH ROBUST PEDESTAL

X42-Series of booms are cylinder slew type systems. The cylinder slew is maintenance friendly with high boom torque capacity.

The pedestal size is optimized with small footprint and high slew motion area. The main valve of the boom is located inside the pedestal and is accessible from each side in case of service.



normet

XROCK®

POWER UNITS

All Normet Xrock power units offer a streamlined power resource for breaker booms and breakers to maximize the performance. The Power units are modular systems with wide access points for service. Power unit motor control panels are PLC controlled. All electric connections and panels are IP65 rated.

Power units have minimum 110 % capacity integrated trip drays for hydraulic oil to meet environmental regulations and avoid oil leakages. The system can be equipped with an automatic fire extinguisher.



RELIABLE CONTROL SYSTEM AND ELECTRONICS

The boom is controlled by accessorial radio remote control.

All exposed control components are IP65 rated. Cables and connections between boom, radio controller and power unit are designed for harsh mining environment.



AVAILABILITY FOR STATE-OF-THE-ART AUTOMATION



All Normet Xrock breaker booms have availability for Xrock® Automation platform. Xrock® Automation system optimizes the mine's processes in a responsible way and gives you the time to focus on anticipating and developing your business.

Xrock® Automation lets operators' control everything ergonomically from the safety of a control room. The Xrock® Automation system itself is specifically designed to be user-friendly: it's easy to learn and intuitive to use, so users will quickly get acquainted with productive work. Boom operation, management and diagnostics are available straight from the control station.

All Xrock® Automation platforms are made flexible and scalable to the mine's current and future demands. As your business grows and develops, we'll deliver you readily available solutions straight from the shelf.



TECHNICAL SPECIFICATION

BOOM

	X42-390	X42-430	X42-460
Maximum reach (incl. nominal breaker), m	5.9	6.3	6.6
Horizontal reach, max (breaker vertical), m	3.9	4.4	4.7
Vertical reach, max (incl. nominal breaker), m	4.1	4.6	4.9
Nominal breaker length, m	2	2	2
Lift boom length, m	2.05	2.05	2.05
Dipper boom length, m	1.45	1.95	2.25

	X42-560	X42-580	X42-620
Maximum reach (incl. nominal breaker), m	7.5	7.8	8.2
Horizontal reach, max (breaker vertical), m	5.6	5.9	6.3
Vertical reach, max (incl. nominal breaker), m	5.3	5.6	6
Nominal breaker length, m	2	2	2
Lift boom length, m	3.25	3.25	3.25
Dipper boom length, m	1.95	2.25	2.75

Welded high tensile steel square pipe structure
250 x 250 mm section

Reinforced swivel points

Heat treated multi alloy steel pins

Special bronze bushings with grease depots

PEDESTAL

Welded steel plate structure

Dual king pin slew pillar

Slew pin diameter 100 mm

Two double acting slew cylinders

Slew angle 170°

Foundation plate width 0.81 m

Foundation plate length 0.96 m

BREAKER

With boom specified configuration

Recommended Normet Breakers:

XB11

XB14

Recommended weight 400 kg - 1000 kg

CONTROL SYSTEM

Control valve with 4 proportional sections and 1 on/off section to control:

- Boom movements
- Breaker

Five mechanical control levers on the main control valve.

Can be equipped with a Radio control unit sold as an accessory.

HYDRAULIC SYSTEM

Power unit PU18-43 - PU30-63

Cylinders:

Double acting cylinders with self-aligning maintenance-free bearings

Easily replaceable seals

Max. pressure 25.0 MPa

Hoist 160/90-700 mm

Dipper 125/70-850 mm

Breaker tilt 125/70-650 mm

Swing (2 pcs.) 100/56-380 mm

X42-390

Hydraulic lifting force 24 kN

X42-430

Hydraulic lifting force 21 kN

X42-460

Hydraulic lifting force 20 kN

X42-560

Hydraulic lifting force 14 kN

X42-580

Hydraulic lifting force 13 kN

X42-620

Hydraulic lifting force 11 kN

POWER UNIT

Constant displacement gear pump

Tank with 110% drip tray, service hatch and oil level indicator

Oil filtration 10 µm

Pressure line filter clogging indicator

Electric oil level switch

Thermostat controlled air cooler for oil with 0.25-0.37 kW fan

Oil pressure gauge 0-25.0 MPa

Pressure relief valve 23.0 MPa

PU18-34

Pump displacement 43 cc

Pump capacity at 1500 rpm 65 l/min

Pump capacity at 1800 rpm 78 l/min

Oil tank 250 l

PU30-63

Pump displacement 63 cc

Pump capacity at 1500 rpm 90 l/min

Pump capacity at 1800 rpm 108 l/min

Oil tank 250 l

PU37-87

Pump displacement 87 cc

Pump capacity at 1500 rpm 125 l/min

Pump capacity at 1800 rpm 150 l/min

Oil tank 250 l

PU45-121

Pump displacement 121 cc

Pump capacity at 1500 rpm 180 l/min

Pump capacity at 1800 rpm 215 l/min

Oil tank 400 l

PU55-151

Pump displacement 151 cc

Pump capacity at 1500 rpm 220 l/min

Pump capacity at 1800 rpm 265 l/min

Oil tank 400 l

REMOTE CONTROL SYSTEM

Wireless remote control with 2 joysticks and cable support

The following machine components can be controlled by radio remote control:

- Boom slew left/right
- Boom lift up/down
- Boom stick in/out
- Breaker tilt in/out
- Breaker on/off
- Power unit start/stop

ELECTRICAL SYSTEM

Mains supply voltage:

- 50 Hz
 - 380 V
 - 400 V
 - 415 V
 - 420 V
 - 525 V
 - Special voltage
- 60 Hz
 - 440 V
 - 460 V
 - 480 V
 - 575 V
 - Special voltage

Flange mounted squirrel cage electric motor:

	1500 rpm (50 Hz)	1800 rpm (60 Hz)
PU18-43	18 kW	22 kW
PU30-63	30 kW	36 kW
PU37-87	37 kW	44 kW
PU45-121	45 kW	54 kW
PU55-151	55 kW	66 kW

TECHNICAL DOCUMENTATION

Standard documents:

Instruction manuals, hard copy 1 pcs:

- English
- Russian
- One of destination EU languages

Spare parts manuals, hard copy 1 pcs:

- English

PDF manuals on USB-stick 1 pcs, includes instruction and spare parts manuals

Additional documentation:

- Extra hard copies of manuals
- Extra PDF manuals
- LinkOne WebView electronic manuals
- Other than standard language manuals
- Boom placement drawing superimposed customer's plant lay-out drawing
- Dimensional (G.A.) drawings
- Coverage drawing
- Pedestal load data table
- Foundation plate drawing

ACCESSORIES

MAIN ACCESSORIES

- PU18-43 Power unit
- PU30-63 Power unit
- XB11 Hydraulic breaker
- XB14 Hydraulic breaker
- Wireless remote control
 - 434 MHz
 - 458 MHz

One Power unit and one Breaker can be selected for the boom.

PROCESS PRODUCTIVITY

- Automatic lubrication system
- Manual lubrication system
- Automatic breaker lubrication system
- Off-line oil filtering system

Automatic and Manual lubrication cannot be selected together.

SAFETY (BOOM)

- Slew limiter kit
- Boom limiter kit

SAFETY (POWER UNIT)

- Fire extinguisher system

COLD CLIMATE ACCESSORIES (POWER UNIT)

- Oil heater
- Oil circulation valve




OTHER ACCESSORIES

- Extended hydraulic hoses, 12 m
- Extended control cable, 20 m
- Extended valve control cable, 12 m
- Special voltage
- Special motor

Tropical motor, special insulation, above 2000 m M.A.S.L. etc..

DIMENSIONS

SIDE VIEW & REACH AREA X42-390

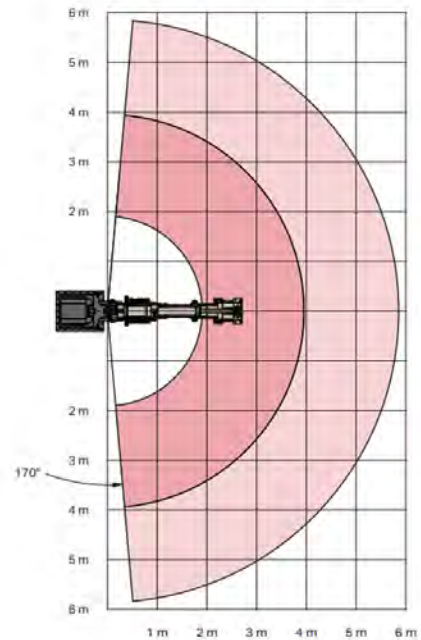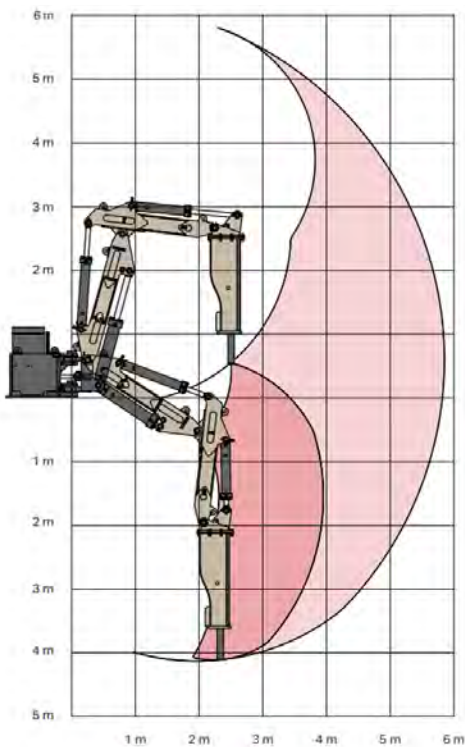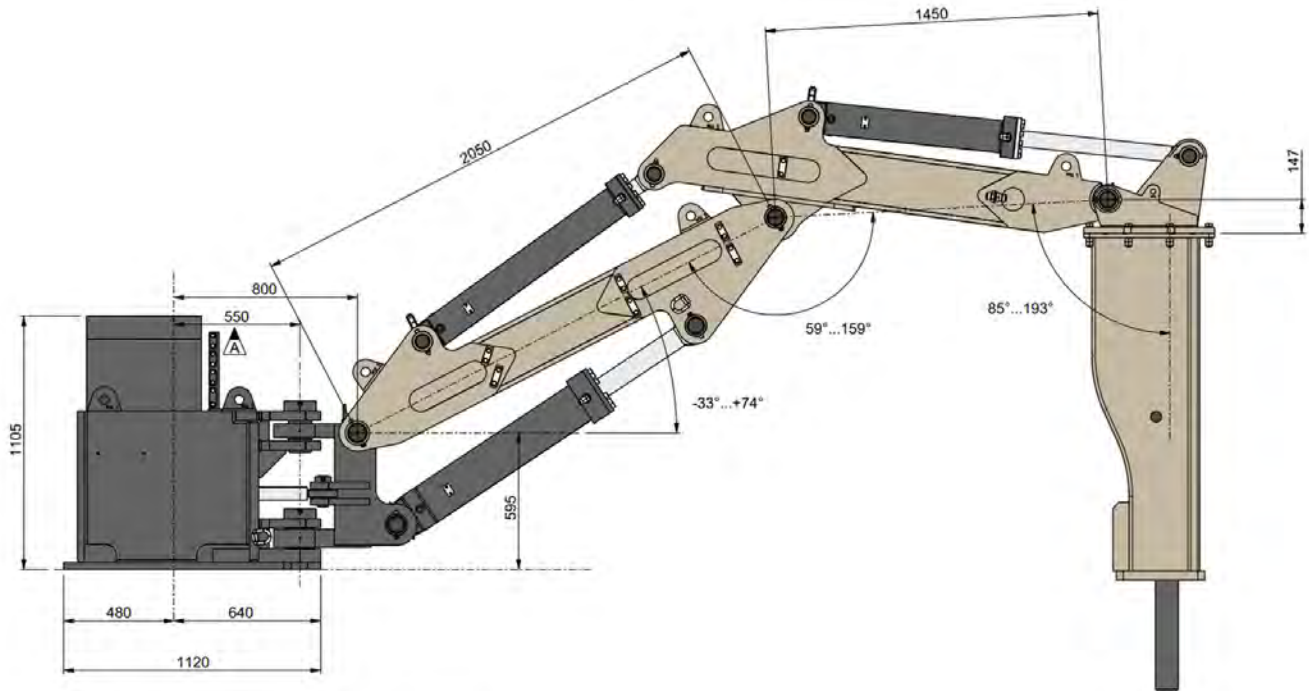




Max. coverage
 Max. coverage with vertical hammer = Recommended working area

Reach calculated using nominal breaker length 2000 mm

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.




SIDE VIEW & REACH AREA X42-430

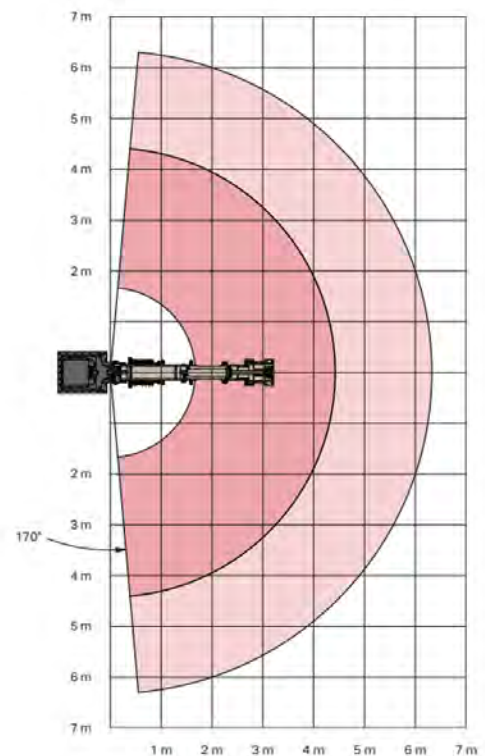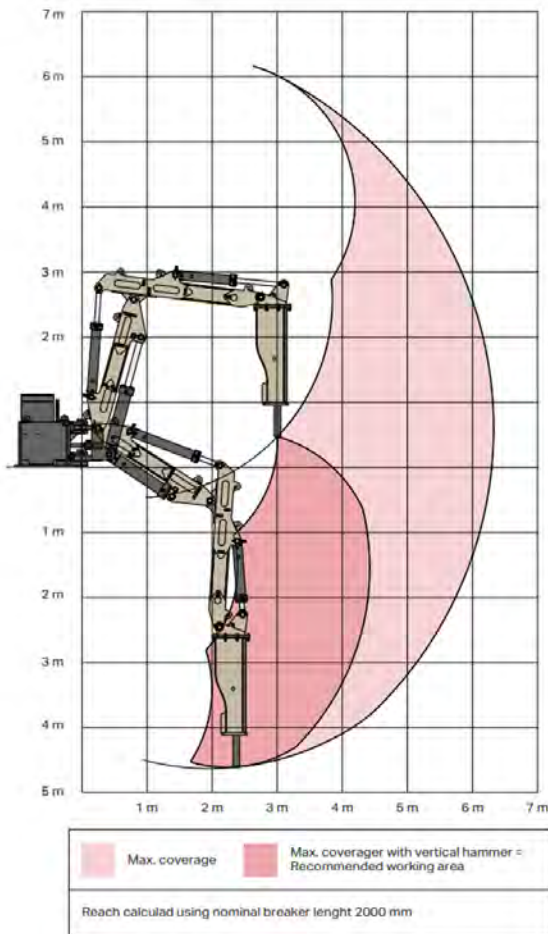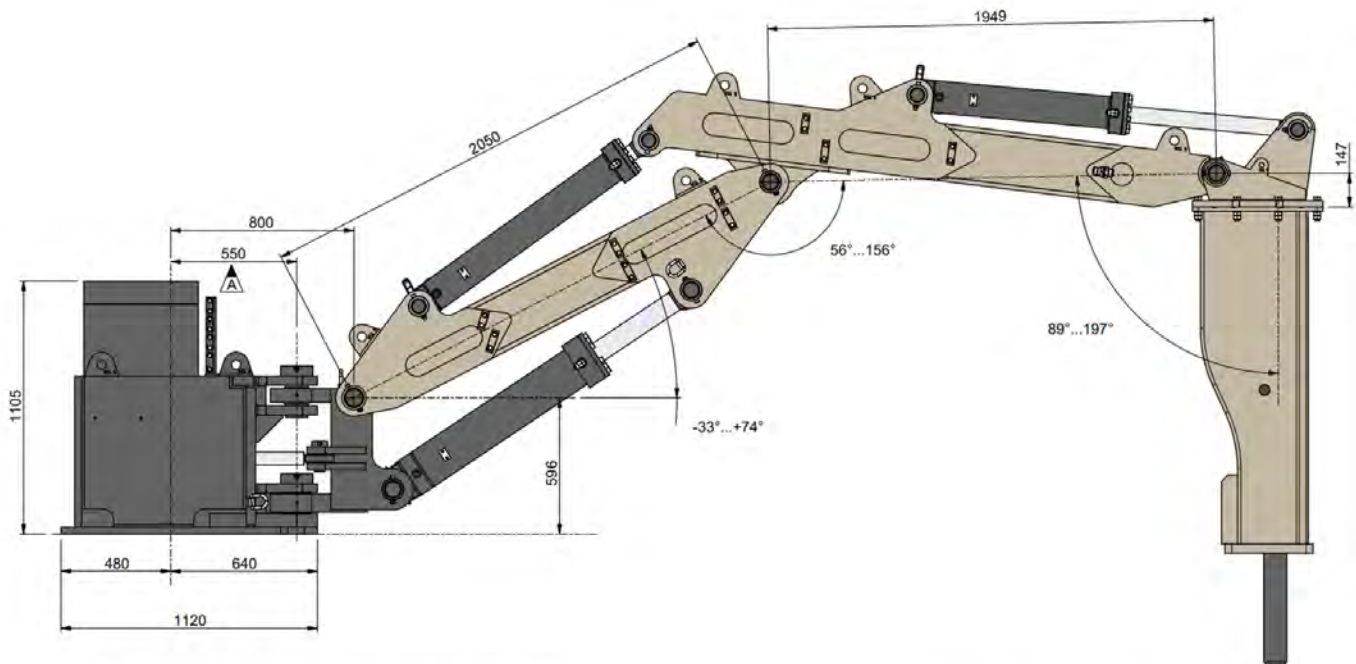

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.




SIDE VIEW & REACH AREA X42-460

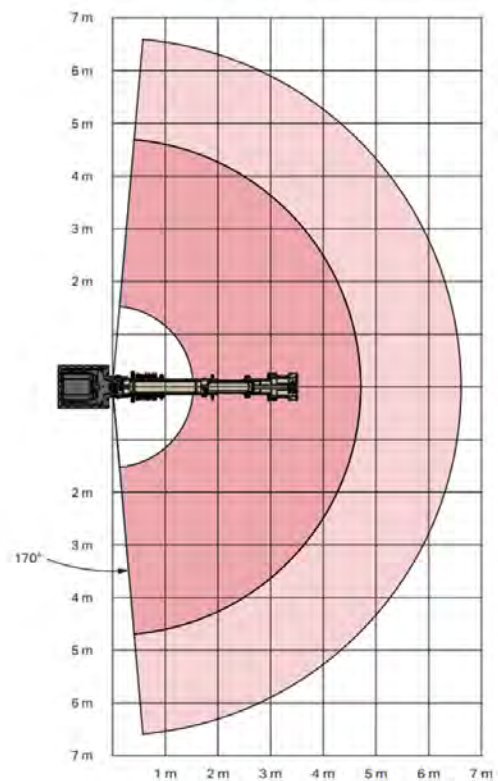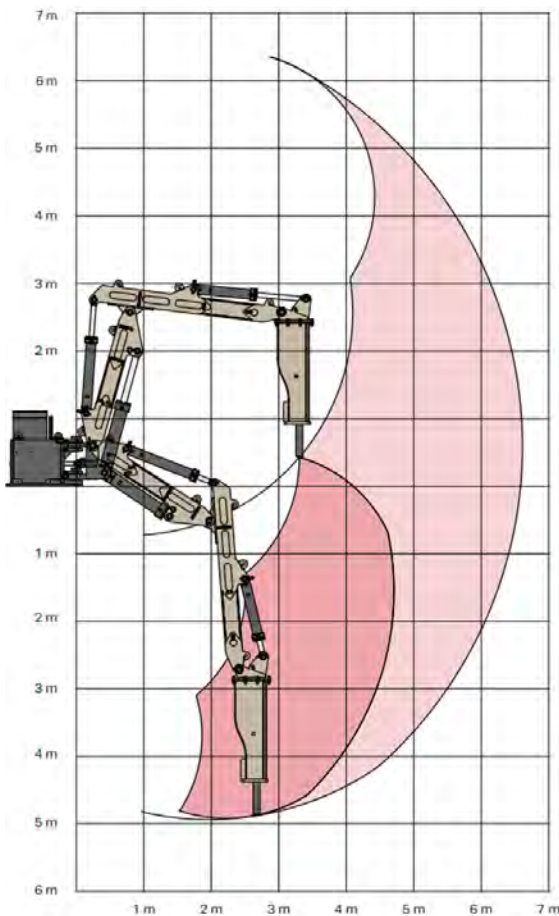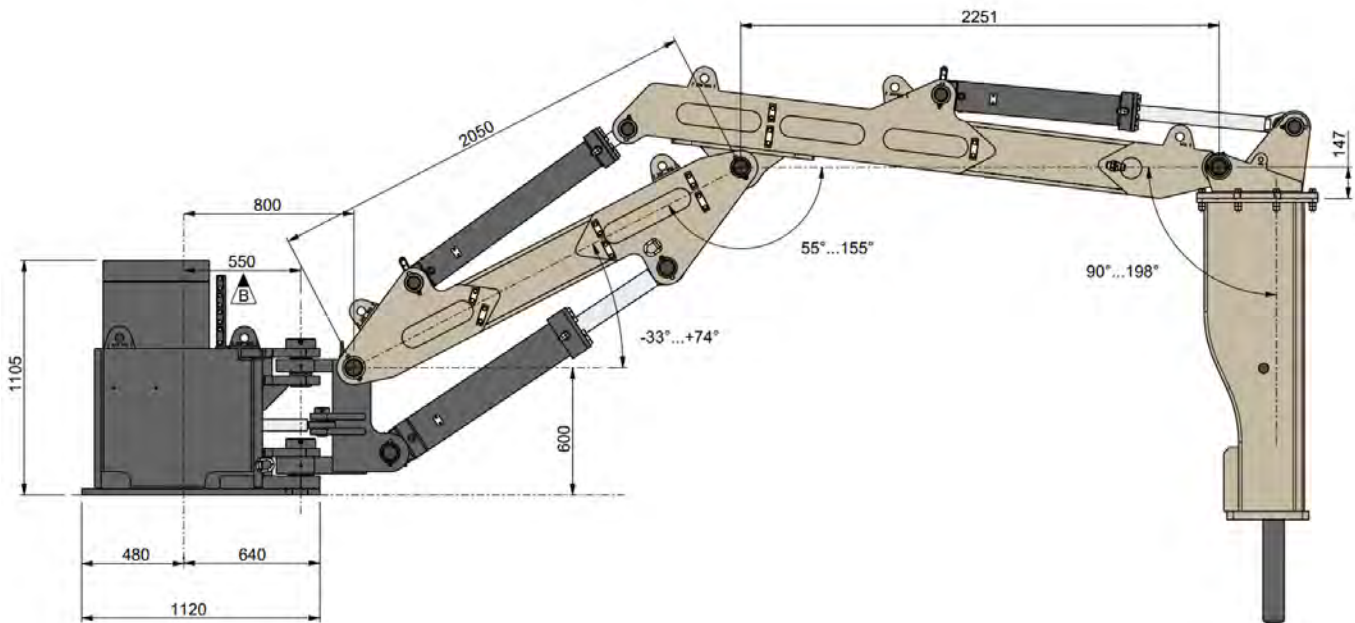

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.




SIDE VIEW & REACH AREA X42-560

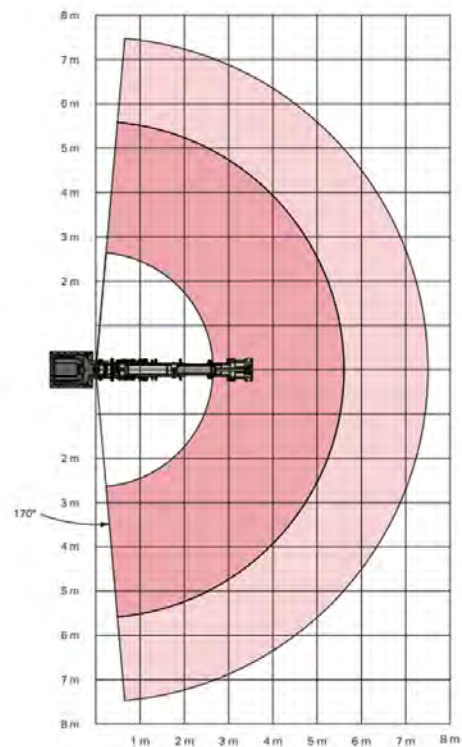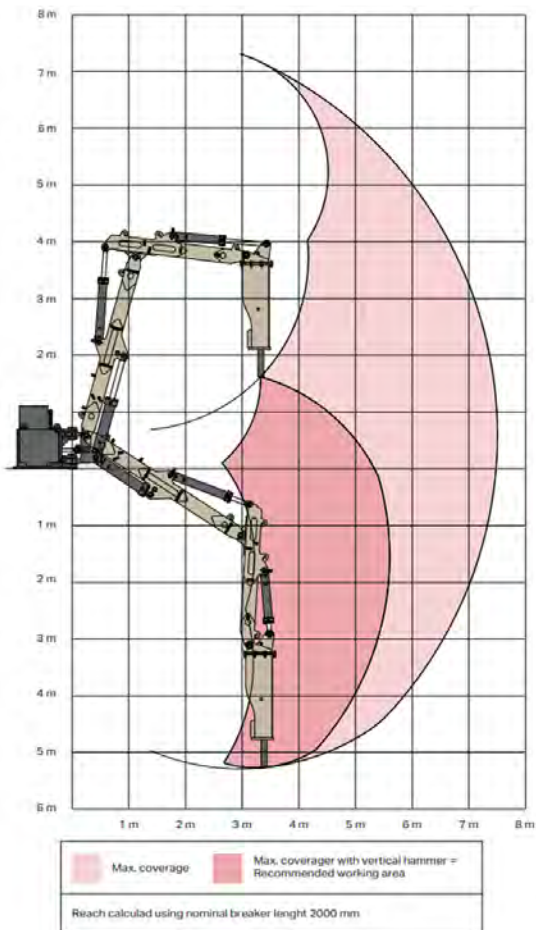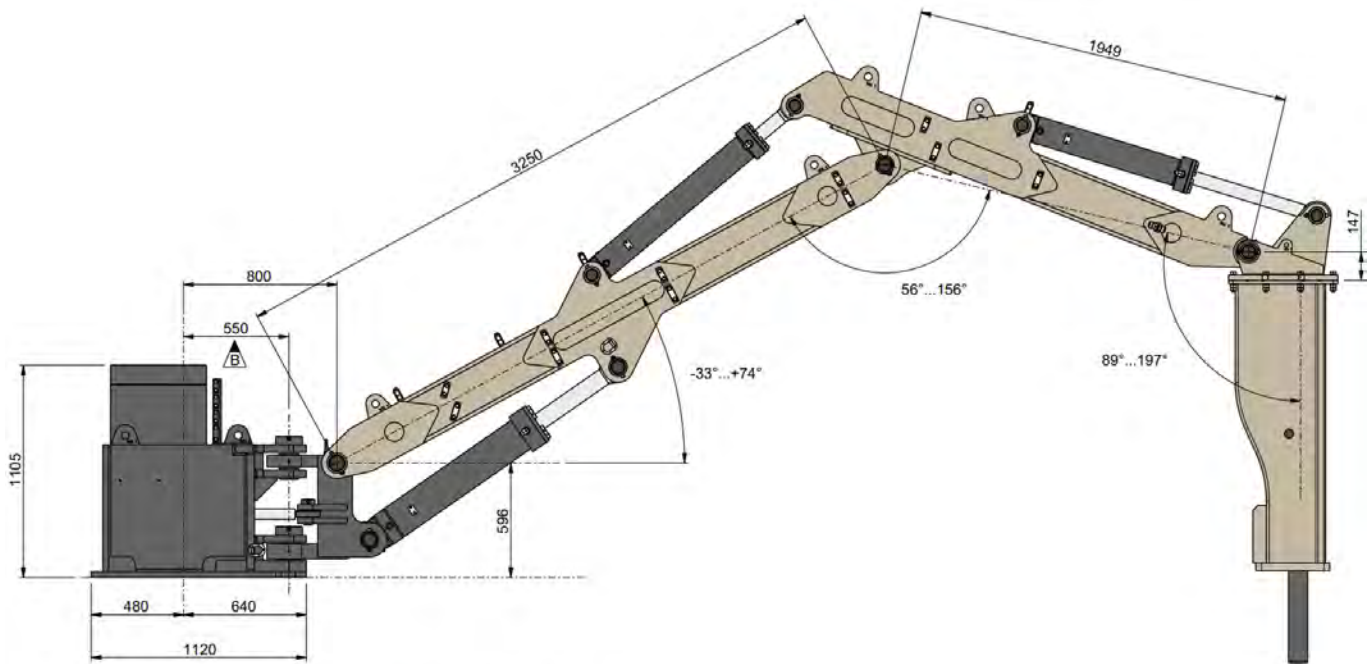

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

SIDE VIEW & REACH AREA X42-580

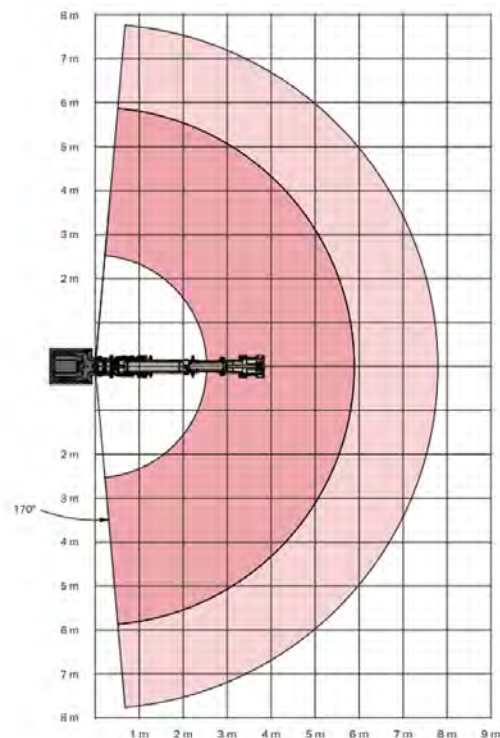
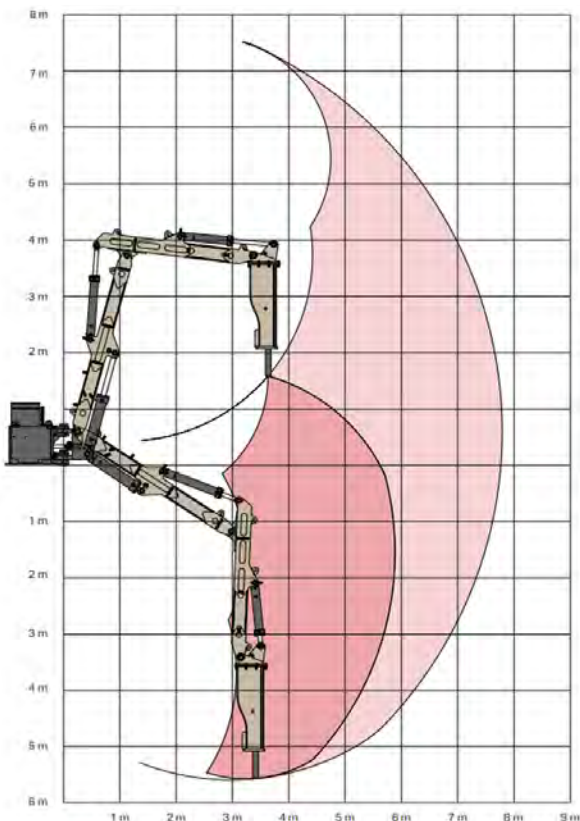
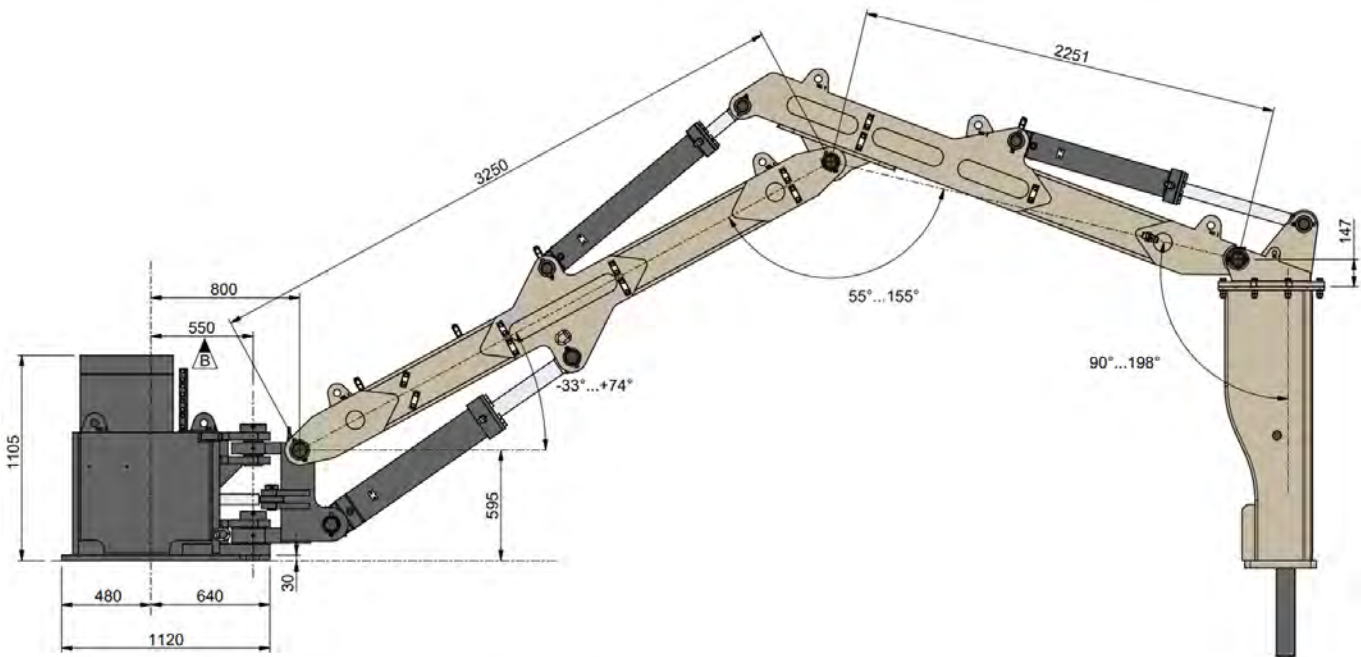


Max. coverage
 Max. coverage with vertical hammer = Recommended working area
 Reach calculated using nominal breaker length 2000 mm.

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


SIDE VIEW & REACH AREA X42-620

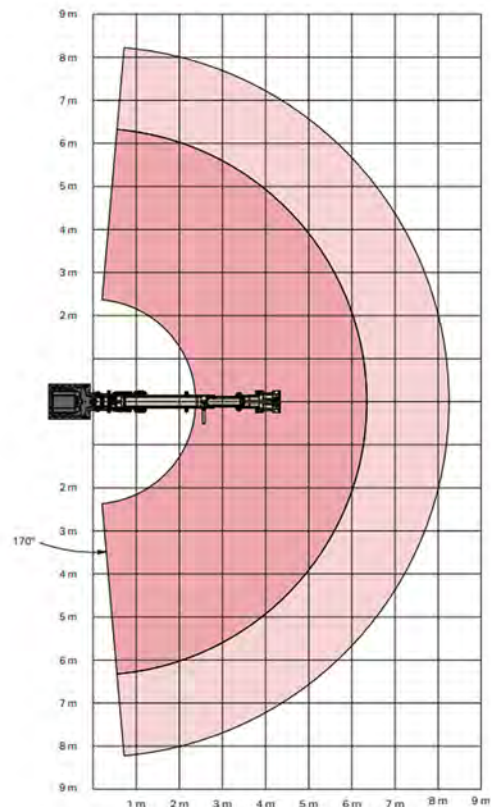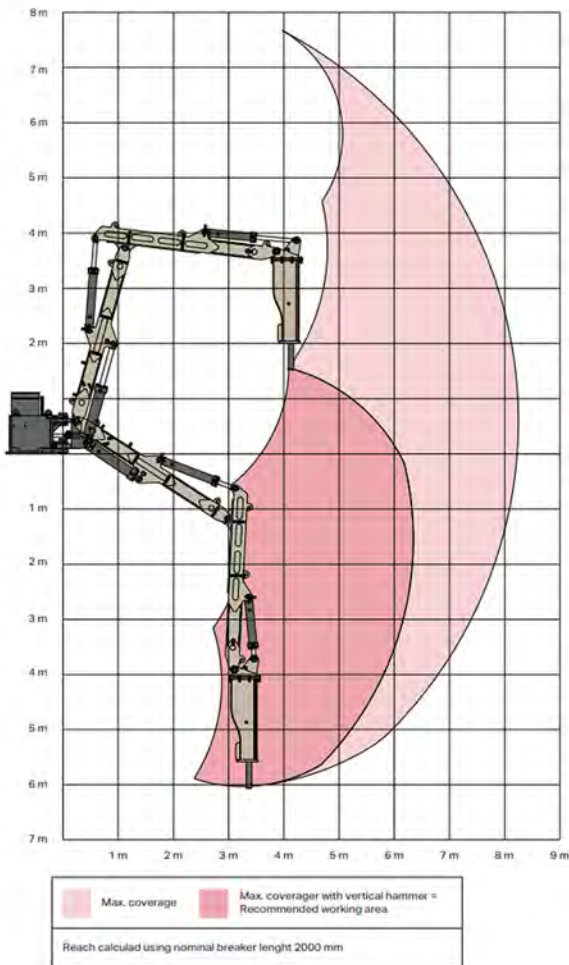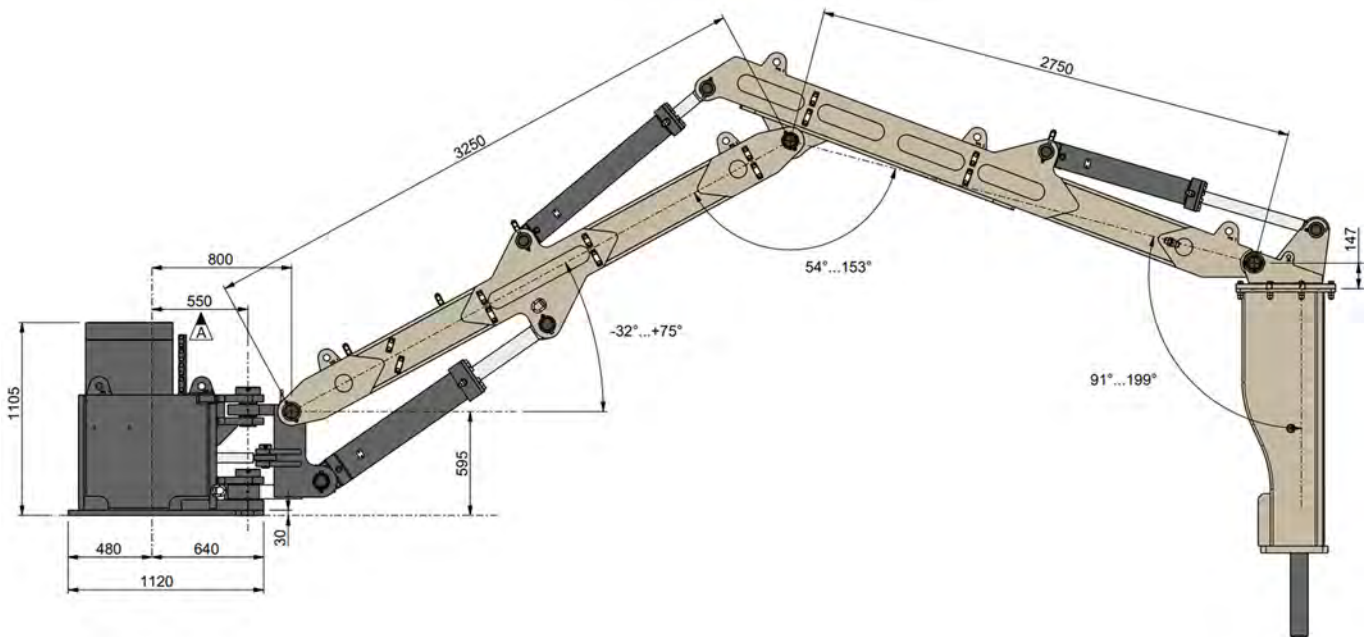


Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

SIDE VIEW POWER UNIT

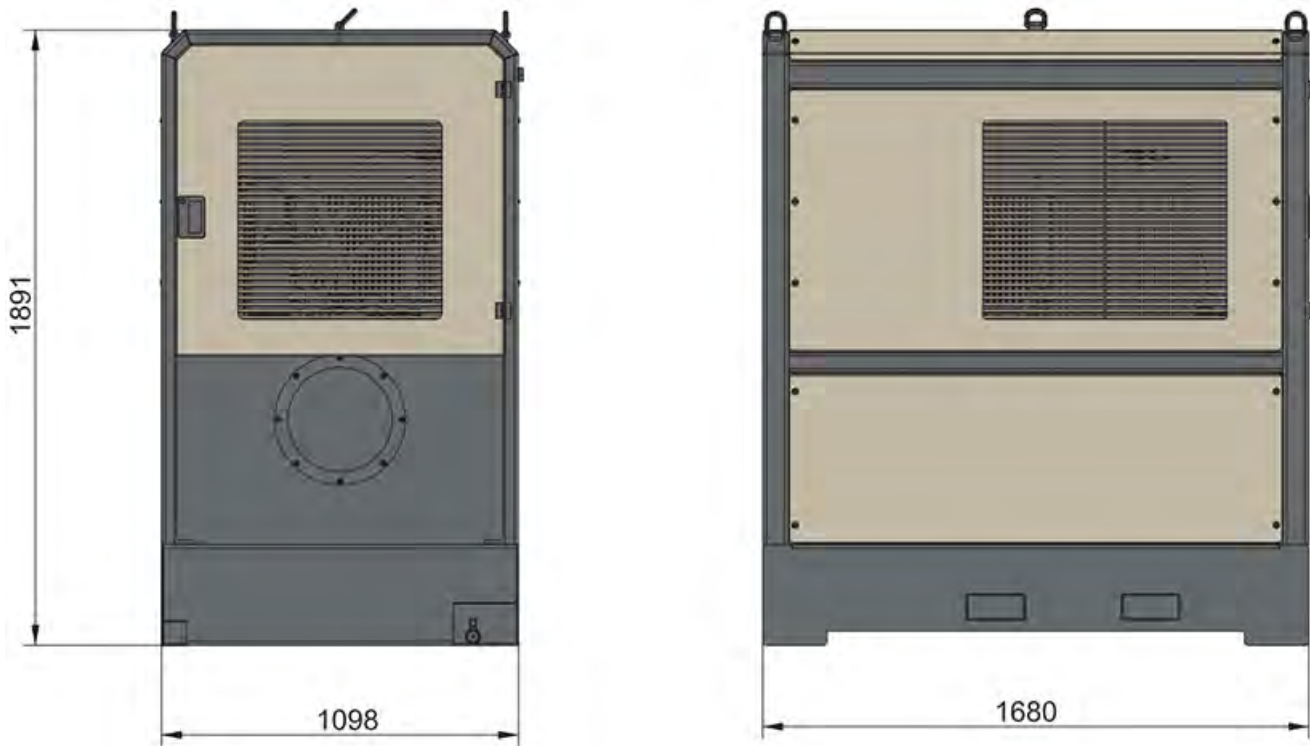


TOP VIEW POWER UNIT

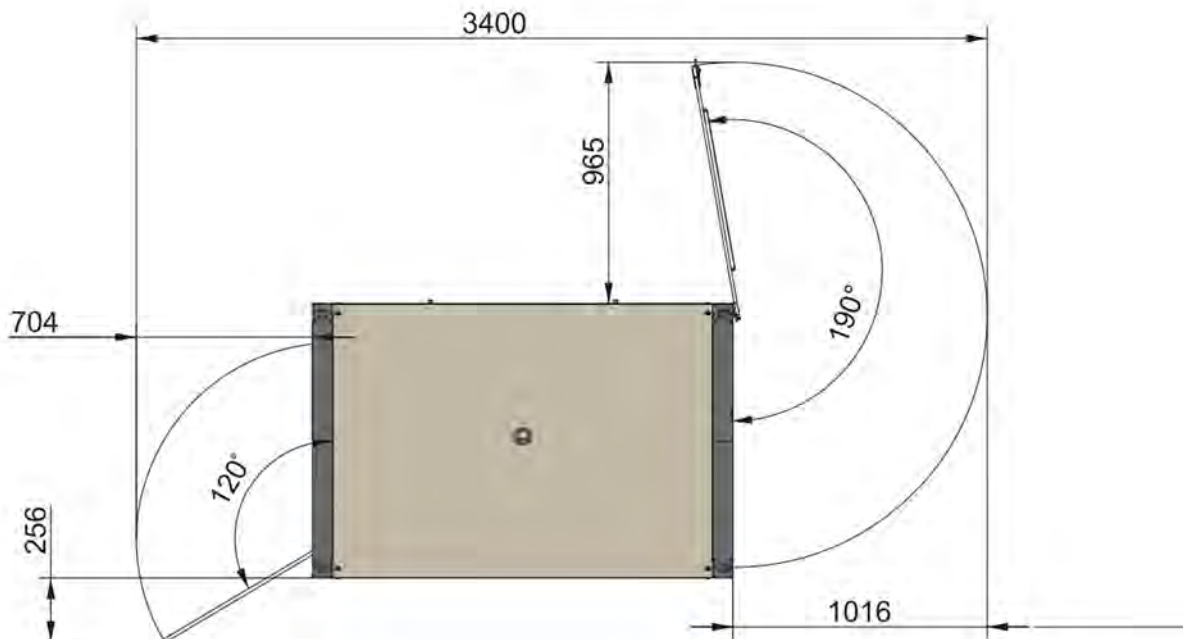

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

BOTTOM VIEW POWER UNIT

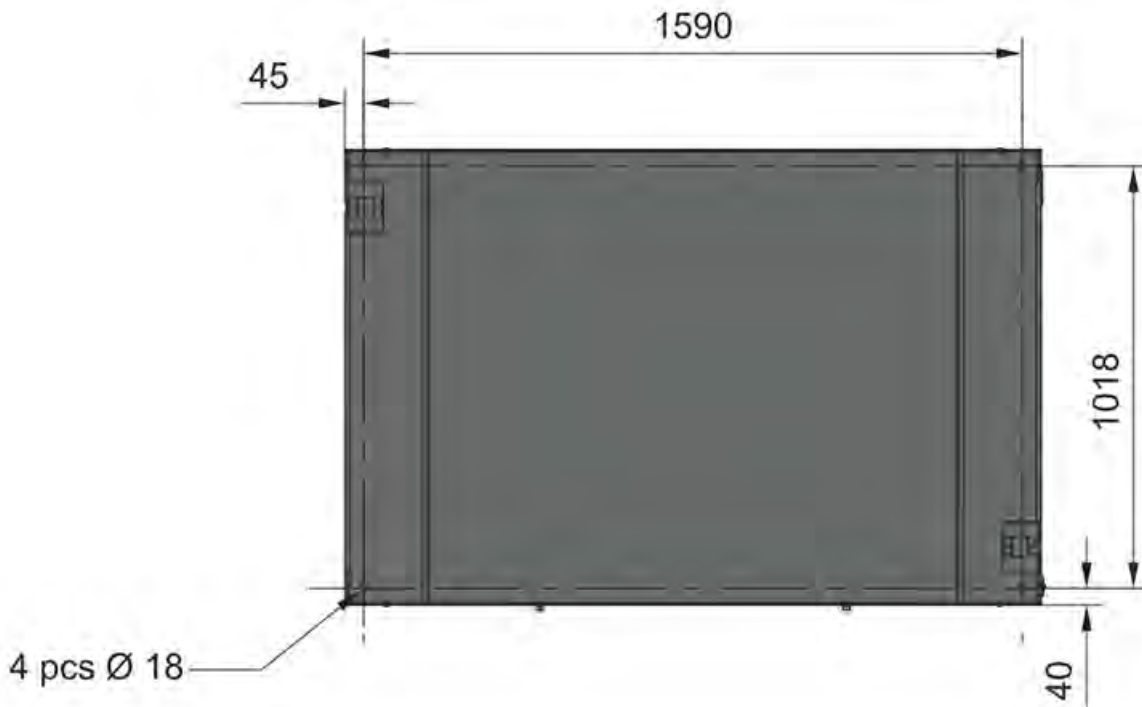

OPERATING WEIGHT (WITHOUT BREAKER)

Base machine X42-390	2500 kg
Base machine X42-430	2550 kg
Base machine X42-460	2600 kg
Base machine X42-560	2650 kg
Base machine X42-580	2700 kg
Base machine X42-620	2750 kg
Power units(without oil):	
Base machine PU18-43	800 kg
Base machine PU30-63	900 kg
Base machine PU37-87	950 kg
Base machine PU45-121	1200 kg
Base machine PU55-151	1310 kg

final machine weight variate in agree with selected options

SERVICES

NORMET SERVICES

Our services cover the whole life cycle of your equipment. They include start-up and commissioning, genuine spare parts, upgrades & modifications, and remanufacturing, as well as field service. We also offer improvement services such as operator training and process audits.

SPARE PARTS

Genuine parts from Normet Services ensure that you always have the highest quality parts available to keep your equipment up and running. Depending on your needs, we can offer everything from individual parts to complete parts contracts, and our professionals around the world have the experience to ensure that you have the parts you need when you need them.

Initial spare part packages:

Normet Xrock products have service kits available for commissioning, 2-year and 4-year operation and most critical parts.

UPGRADES AND MODIFICATIONS

Our Upgrades and Modifications services are designed to ensure the economical, efficient and purposeful performance of

your equipment over its entire life cycle. A service provided by a reliable OEM like Normet ensures the safety and performance of your equipment. Normet Upgrades and Modifications save you both time and money, while delivering the high quality you expect from us.

SERVICE CONTRACTS


With a service agreement, Normet manages your fleet with guaranteed availability and agreed costs, giving you transparency for your life cycle costs, annual operational budget and fleet uptime. This lets you focus on your core operations. Each service agreement is built and customized to meet the individual customer's needs from our portfolio of services. Depending on the level of service agreement you need, you can choose anything from basic technical support for an individual machine all the way up to services for your entire fleet, as well as process performance. The service levels we offer are:

- Parts Availability
- Fleet Support
- Fleet Availability
- Process Performance

The content of a service level can be tailored to meet your particular requirements.

TRAINING SERVICE

Our Training Services are available for you and your operators throughout the equipment lifecycle and they include:

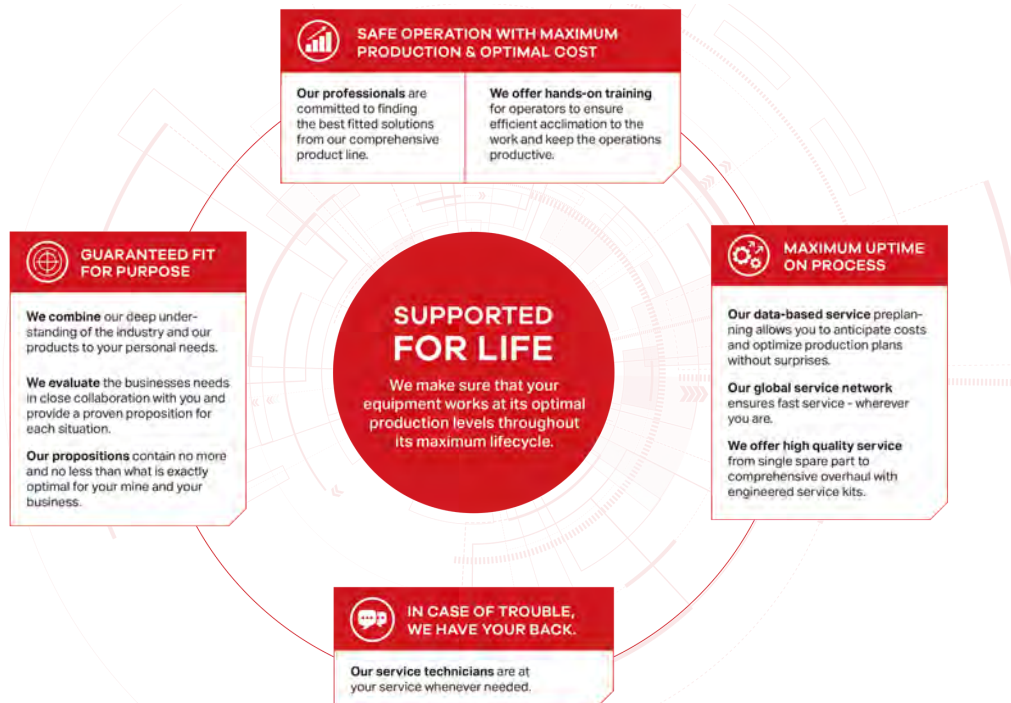

START-UP AND COMMISSIONING

1. OPERATOR TRAINING

	Start-up training	Commissioning
1.1 Classroom training		
General introduction and operation of machine	Basic	No classroom training included in commissioning
Safety instructions	Basic	
Use of manuals	Basic	
Technical introduction of equipment	Basic	
Hands-on service and pre-operation checks	Basic	
Controls and driving (starting, driving, stopping, parking)	Basic	
1.2 Practical training		
Pre-operation checks	Basic	Introduction
Driving, starting, stopping, parking	Basic	Introduction
Preparing the machine for specific operation conditions	Basic	Not covered
Operation	Basic	Introduction
Washing the machine	Basic	Introduction
Troubleshooting	Basic	Basic

2. MAINTENANCE AND REPAIR TRAINING

General operation of machines	Basic	Introduction
Symbols of drawings and codes	Basic	Not covered
Understanding hydraulic and electric schematics	Basic	Introduction
Control systems	Basic	Introduction
Function of main components (depending on equipment)	Basic	Introduction
Locations of components in the machine	Basic	Not covered
Periodical maintenance	Basic	Introduction
Troubleshooting	Basic	Not covered
Use of manuals	Basic	Introduction
Connection of hydraulic and electrical equipment	Basic	Not covered