

DULUX ACRATEX COATING SYSTEM FOR

AAC 75MM

JOINTS: RENDERWALL ACRABUILD PLUS AND EMBEDDED MESH

BASECOAT: RENDERWALL ACRABUILD PLUS

TEXTURE COATING: COVENTRY COARSE

PROTECTIVE COATING: ACRASHIELD



System Overview

Application

AAC panel systems for all segments of the construction industry: new housing, alterations and additions, high & low-rise multi residential dwellings and freeway noise barriers. AAC panels are non-load bearing external wall solutions.

Description

75mm thick panel of Autoclaved Aerated Concrete (AAC) with corrosion protected steel reinforcement embedded during production. Panels come in a variety of sizes depending on the application.

Dulux Acratex has the performance coating solutions to deliver long term protection of facades.

When specifying your next project it makes sense to protect it against the harsh elements. That's why Dulux promotes the Acratex systems, designed to give you maximum design flexibility and maintain the coating's good looks now and for years to come.

Dulux Acratex Coating Systems

When you specify a Dulux Acratex Coating System, you immediately get the peace of mind that comes from using a proven system from a company with the reputation of Dulux.

Benefits of the Acratex Coating System



Resistant to mould and dirt pick up



Resistant to atmospheric pollution and protects from UV radiation, moisture and salt air



Available in a wide range of Australia's most popular Dulux colours




Easy to clean and maintain



Weather resistant

AAC 75MM

PREPARATION

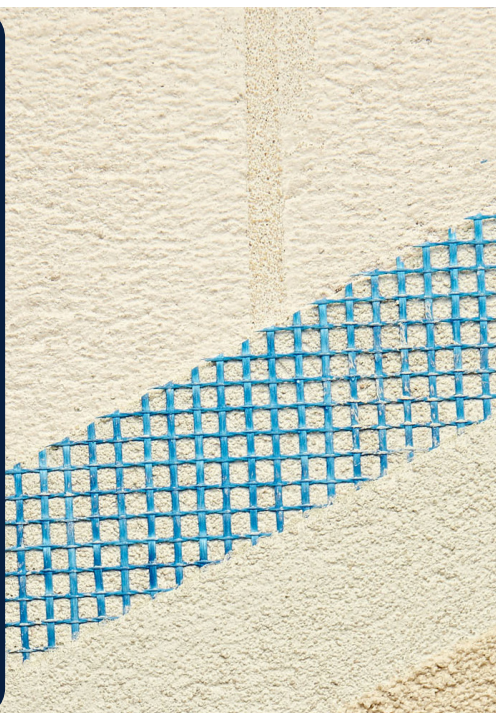


JOINTS

Dulux Acratex RenderWall
AcraBuild Plus
with embedded mesh

AcraBuild Plus is a pre-packaged, dry mix cement render used as a low build levelling coat.



Trowel



Thickness
Joints to be flush and level



For more product details, scan or click the QR code

TEXTURE COATING




TEXTURE COATING

Dulux Acratex Texture coating selected to desired aesthetic requirements

Example shown here:
COVENTRY COARSE



Trowel



Thickness
Min WFT 1333 microns
Min DFT 1000 microns



For more product details, scan or click the QR code

PROTECTIVE COATING




PROTECTIVE COATING

Dulux Acratex AcraShield
2 COATS

The AcraShield system is a multi-layered protective, high build elastomeric membrane coating, which protects against all climatic conditions and environmental pollutants.



Nap roller with yoke frame



Thickness
Min WFT 167 microns
Min DFT 75 microns



For more product details, scan or click the QR code



Colour shown: Ringlet Quarter
Light Reflection Value: 90

When using dark colours, thermal stresses will increase on the coated substrate and additional control joints should be considered



Refer to DuSpec+ [AUAC03617](#)
for full coating system specification
[Click here to access](#)

For further information visit acratex.com.au or call **13 23 77**

Disclaimer: Any advice, recommendation, information, assistance or service provided by Dulux Acratex in relation to goods manufactured by it or their use and application is given in good faith and is believed by Dulux Acratex to be appropriate and reliable. However, any advice, recommendation, information, assistance or service provided by Dulux Acratex is provided without liability or responsibility.

Dulux Acratex is a division of DuluxGroup (Australia) Pty Ltd. ABN 67 000 049 427. Dulux, Acratex, AcraShield, Coventry, RenderWall, AcraBuild and DuSpecPlus are registered trade marks of DuluxGroup (Australia) Pty Ltd.

