



## UT D57 Spot Ceiling


Ceiling Mounted Directional Accent

### Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments. A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.



### Dimensions

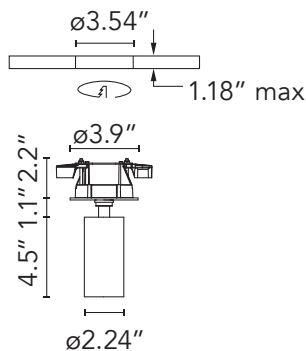

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Lamp

Lamp Type	LED ARRAY
Wattage	18W
Output Nominal	1780lm, 1900lm, 22150lm (3000K CRI80)
Color Temperature	3000K, 4000K 3500K* (See Notes)
Color rendering	CRI 80, 90

### Optical

Beam Angle	10°/ 21°/ 42°
Lighting Type	Direct
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Adjustable
Weight	1.8 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°

### Finishes

Painted lacquer

☐ 30 White ☒ 14 Black



Installation type	Ceiling Trim
Environment	Indoor
Minimum Plenum height	3.5"
Maximum Ceiling thickness	1.18"




## UT D57 Spot Ceiling

Ceiling Mounted Directional Accent



### Dimensions

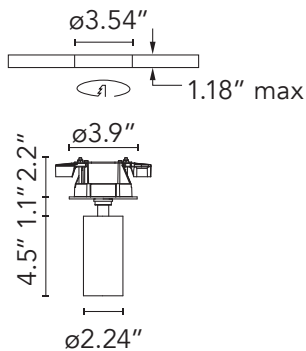

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Electrical & Control

driver location: Remote	Remote
Driver Input Voltage	120V-277V
Fixture Vf	38V
Current mA	450mA
Control	Control: 0-10V, ELV

### Performance

Maximum delivered output	From 1189lm to 1664lm
Efficacy	93lm/W

### Notes

Integral LED is not field replaceable.

IC-rated downlight for direct insulation contact.

Fixture is constant Current Low Voltage LED, Class 2.

Just 1 accessory can be install at the time. For filter options contact Flos.


Semi recessed Spotlight, Wiring suitable for plenum spaces

3500K available, but not cataloged. Consult factory for additional color temperatures.

## UT D57 Spot Ceiling

Ceiling Mounted Directional Accent

### How to specify

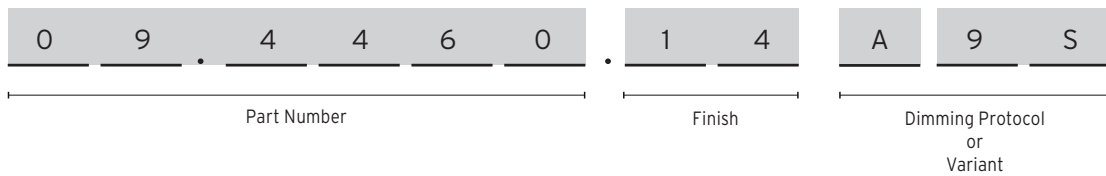


### How to Specify

ex. 09.4460.14A9S

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Power Supply
3000K	80	18W	2150lm	10°	09.4460	<input type="checkbox"/> 30 = White <input checked="" type="checkbox"/> 14 = Black	IC Rated , Remote Power Supply, order Separately
				21°	09.4461		
				42°	09.4462		
3000K	90	18W	1780lm	10°	09.4463	<input type="checkbox"/> 30 = White <input checked="" type="checkbox"/> 14 = Black	A9S = Remote power Supply, order separately
				21°	09.4464		
				42°	09.4465		
4000K	90	18W	1900lm	10°	09.4470	<input type="checkbox"/> 30 = White <input checked="" type="checkbox"/> 14 = Black	A9S = Remote power Supply, order separately
				21°	09.4471		
				42°	09.4472		

### Photometrics



#### 3000K CRI 90

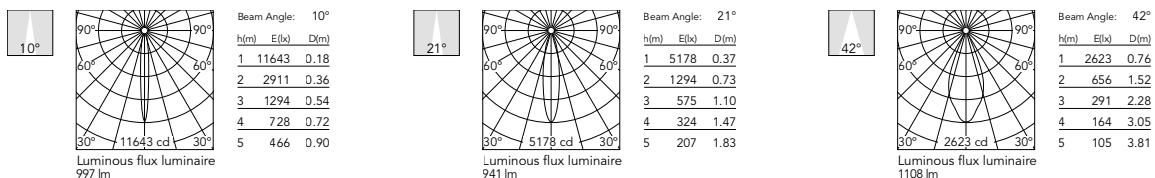



## UT D57 Spot Ceiling

Ceiling Mounted Directional Accent

### Required Splice Box

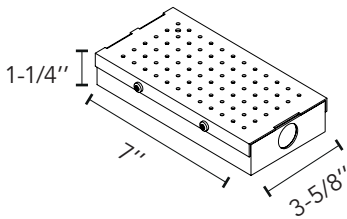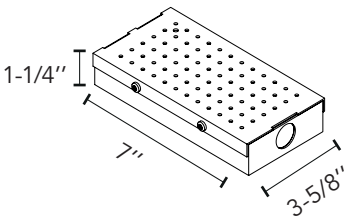Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 450mA, 25W, 0-10V. Dimmable, 120/277V. 1 Driver per Light	Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 450mA, 40W, 0-10V. Dimmable, 120/277V. 1 Driver per Light	
SP25W450MA-10V-A02	SP40W450MA-10V-A02	
		



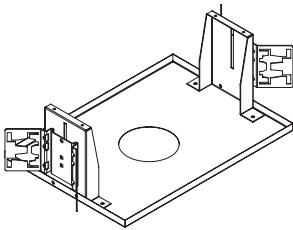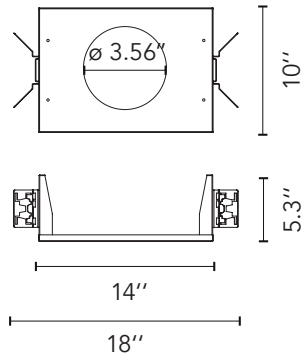


### Trays

Registration tray -non electrical, place holder for non IC new construction, Ø 3.56"	
TRAY-0017	
	
	

## UT D57 Spot Ceiling

Ceiling Mounted Directional Accent

### Optional Accessories \*

Cross baffle	Elliptical lens	Flood lens
08.8429.00	08.8431.00	08.8432.00
		
Honeycomb anti-glare louvre *	Snoot shielding cone	
08.8428.00	08.0526.00	
		

\* Fixture accommodates exclusively 1 accessory, for Filter options contact Flos