



Find Me 2 Monopoint

Ceiling Recessed Trimmed / Trimless Adjustable Spotlight

Description

Hide-and-go-seek brought to light. The versatile Find Me is a tiny semi-recessed downlight hidden in the ceiling until otherwise sought. With a simple pull, the downlight can extend below the ceiling and transform into a refined cylindrical monopoint. This diminutive yet powerful luminaire is endlessly versatile and can tilt 90 degrees and rotate 360 degrees. Deep matte black snoot maximizes cut off and reduces glare. The Find Me line is available in a single version with or without trim and in a pendant version.

Lamp

Lamp Type	LED
Wattage	7.2W
Initial Lumens	915lm, 960lm
Color Temperature	2700K, 3000K 3500K* (See Notes)
Color rendering	CRI 90

Optical

Beam Angle	18°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	1.2 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle	70°
Rotation	360°
Finishes	Painted lacquer


☐ 30 White

☐ 06 Chrome

☐ 14 Black



Dimensions

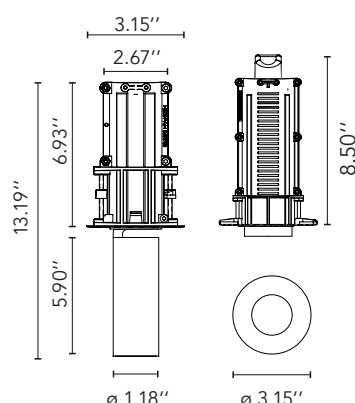

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Installation type	Ceiling Trim/ Trimless
Environment	Indoor
Minimum Plenum height	9"
Maximum Ceiling thickness	1.18"



Find Me 2 Monopoint

Ceiling Recessed Trimmed / Trimless Adjustable Spotlight


Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Fixture Vf	13V
Current mA	600mA
Control	0-10V

Performance

Maximum delivered output	From 504lm to 537lm
Efficacy	74.6lm/W

Dimensions

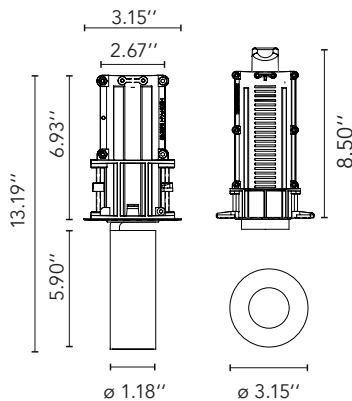

Notes

Integral LED is not field replaceable.

IC-rated downlight for direct insulation contact.

Fixture is constant Current Low Voltage LED, Class 3.


Just 1 accessory can be install at the time. For filter options contact Flos.

Wiring suitable for plenum spaces.

Maximum remote distance is 50ft with 16ga.

3500K available, but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Find Me 2 Monopoint

Ceiling Recessed Trimmed / Trimless Adjustable Spotlight



How to specify

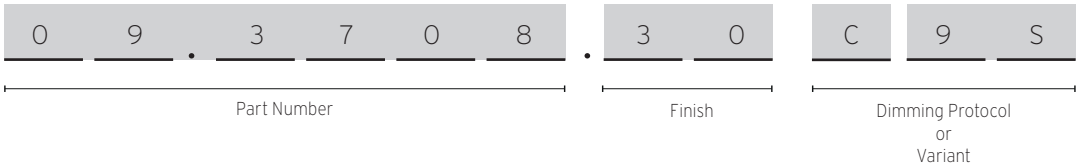

How to Specify ex. 09.3708.30.9S + SP40W600MA-10V-A02

Part Number	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Finish	Dimming Protocol
09.3708	3000	90	960	731	7.2W	18°	<input type="checkbox"/> 30 = White	C9S = Remote Power Supply
09.3707	2700	90	915	693	7.2W		<input checked="" type="checkbox"/> 14 = Black <input type="checkbox"/> 06 = Chrome	C9S = Remote Power Supply

Photometrics

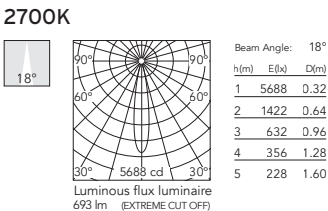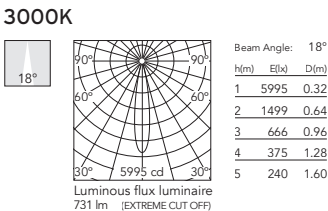

Find Me 2 Monopoint

Ceiling Recessed Trimmed / Trimless Adjustable Spotlight

Required Splice Box

Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 600mA , 40W, 0-10V Dimmable, 120/277V	Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 600mA , 25W, 0-10V Dimmable, 120/277V	
SP40W600MA-10V-A01	SP25W600MA-10V-A02	
