



G-O

Wall Recessed Fixed Indirect. Designed by Jorge Herrera

Description


G-O is a family of small lights that make a big impression while providing useful illumination for stairs, paths and way finding, while only using 1.2 watts per fixture. Robust machined bronze, stainless steel or aluminum construction available in a variety of finishes and light color options result in a lighting tool that enhances the most refined architecture.



Lamp

Lamps Type	LED
Wattage	1.2W
Output Nominal	105 lm
Color Temperature	3000K
Color rendering	CRI 90

Dimensions

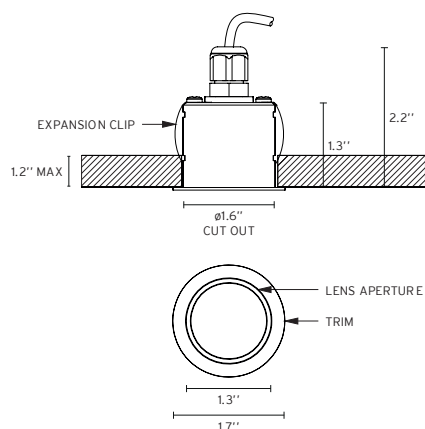

Optical

Beam Angle	up to 74°
Lighting Type	Wall-Washer
Light Distribution	Symmetric

Physical

Material	Aluminum, stainless steel or bronze
Aiming	Fixed
Weight	1.3 Pounds
Ingress Protection Rating	IP65

Certifications



Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Finishes	Painted lacquer					Light colours	
30 White	29 Anodized Aluminium	55 Stainless Steel	BZ Bronze	AN Anodized Black		White Light	Amber Light

Installation type	Wall surface
Environment	Indoor / Outdoor



G-O

Wall Recessed Fixed Indirect. Designed by Jorge Herrera

Electrical & Control

Voltage	24V
Control	0-10V, ELV
Driver	Remote

Performance

Maximum delivered output	347lm, 372lm, 398lm
Efficacy	33.2 lm/W

Notes

Embedded light fixture for indoor use in all its finishes except Stainless Steel which is suitable for outdoor use

Fixture body is made of aluminum, stainless steel or machined bronze

Optional extruded aluminum accessory for embedding in concrete walls and outdoor installations available.

Fixture is constant voltage, 24 volt with remote power supply.


Available with 0-10v dimmable driver, 96 watt max.

Fixture can be wired in parallel, up to maximum allowed wattage of power supply.

Distance should not exceed driver's limits for voltage drop.



Dimensions

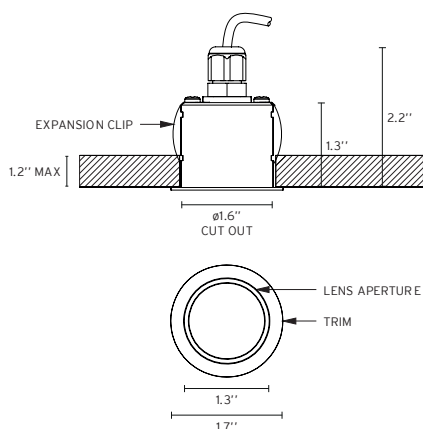

Certifications



Suitable for Wet locations

Photometrics


For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.

G-O
Wall Recessed Fixed Indirect. Designed by Jorge Herrera


How to specify ex. 09.3200.30A9S + LEDSB30W24V-10V-D01

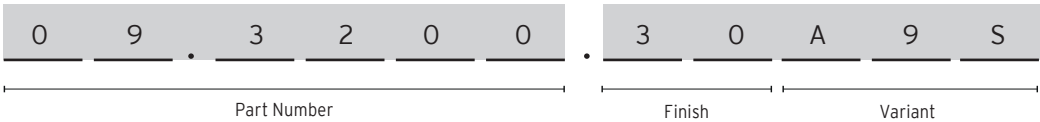


QTY	Item Number	Description	Beam Spread	Delivered Lumen	Finish	Power Supply
	09.3200	G-O White Light, LED, UL	74 °	4.26 lm	BZ = Bronze 29 = Anodized Aluminum 30 = White 55 = Stainless AN = Black	A9S= Remote Power Supply (see next page)
	09.3201	G-O Amber Light, LED, UL	72 °	1.84 lm	BZ = Bronze 29 = Anodized Aluminum 30 = White 55 = Stainless AN = Black	A9S= Remote Power Supply (see next page)

Photometrics

White Light/Luz Blanca



Amber Light/Luz Ámbar



G-O


Wall Recessed Fixed Indirect. Designed by Jorge Herrera

Power Supply

Remote class II power supply, 30W, 120-277VAC Input, 0-10V dimming driver.

Part Number:

LEDSB30W24V-10V-D1




Optional Power Supply

LED Driver, 24VDC, 60W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input, indoor-outdoor enclosure, UL LISTED

Part Number:

LEDSB60W24V-VAR-Y1



Optional Accessories

Accessory for embedding in concrete walls and for outdoor installation

Part Number:

08.8422.00

