



C1 Double Spot Wall Large


Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen

Description

C1, an adjustable luminaire with a refined simplicity that makes it a unique product. The cylinder hides an intelligent mechanism that allows for an amazing flexibility of the main body. The family has been designed with two different sizes in all versions, for both ceiling and wall applications. C1 combines the benefits of an innovative silicone lens that allows absolute beam control with an extreme efficiency, heat resistance and maximum quality light distribution.



Dimensions

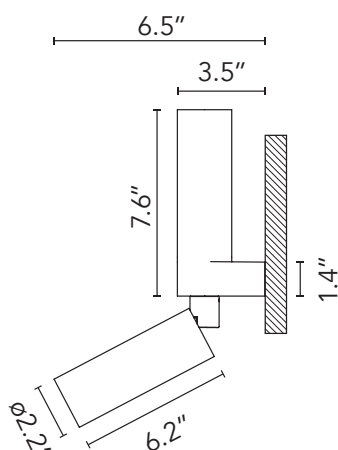

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED
Wattage	14.5W
Output Nominal	2450lm, 2600lm
Color Temperature	2700K / 3000K / 3500K* (See Notes)
Color rendering	CRI 90

Optical

Beam Angle	14°, 23°, 34°, 45°
Lighting Type	Direct / Indirect
Light Distribution	Symmetric with one driver Variable if driven separately

Physical

Material	Aluminum
Aiming	Adjustable (Lower)
Weight	1.2 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle	60°
Rotation	180°
Finishes	Painted lacquer

☐ DY White ☐ DR Anthracite ☐ EQ Brushed Copper ☐ ER Brushed Steel ☐ ES Brushed Bronze



Installation type	Wall
Environment	Indoor




C1 Double Spot Wall Large

Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen



Dimensions

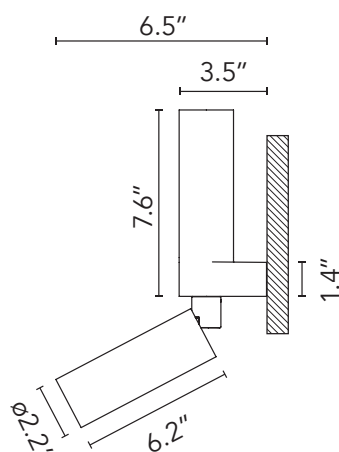

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Electrical & Control

driver location:	Remote
Driver Input Voltage	120V-277V
Fixture Vf	26V
Current mA	1200mA
Control	0-10V, 1 120V-277V
<i>Request other specific Dimming protocols</i>	

Performance

Maximum delivered output	up to 2163 lm / up to 2228 lm
Efficacy	153 lm/W

Notes

Integral LED is not field replaceable.

Fixture is constant Current Low Voltage LED, Class 2.

Field replaceable optics not cataloged consult factory for options


The remote listed power supply (not included) must be placed in an accessible location.

Uplight and downlight can be control individually. 2 drivers must be ordered if this is required.

3500K available, but not cataloged. Consult factory for additional color temperatures.

C1 Double Spot Wall Large
Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen

How to specify



How to Specify


Part Number	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Finish
03.1240	2700	90	2450	2139	28W	14°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1245	3000	90	2600	2139	28W	14°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1241	2700	90	2450	2163	28W	23°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1246	3000	90	2600	2228	28W	23°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1242	2700	90	2450	2112	28W	34°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1247	3000	90	2600	2150	28W	34°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1243	2700	90	2450	2132	28W	45°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>
03.1248	3000	90	2600	2216	28W	45°	<div>DRB =Anthracite</div> <div>DYB = White</div> <div>EQB Brushed Copper</div> <div>ERB Brushed Steel</div> <div>ESB Brushed Bronze</div>

C1 Double Spot Wall Large


Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen

Photometrics

2700K

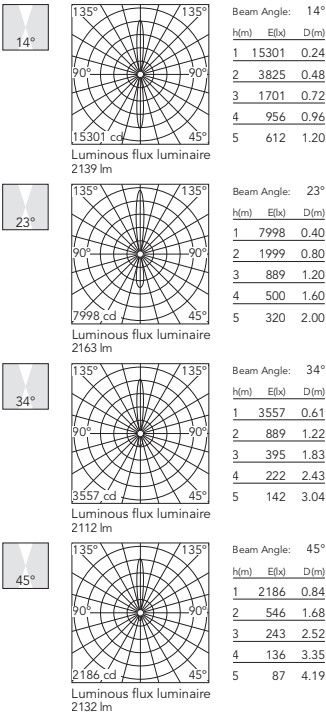



3000K

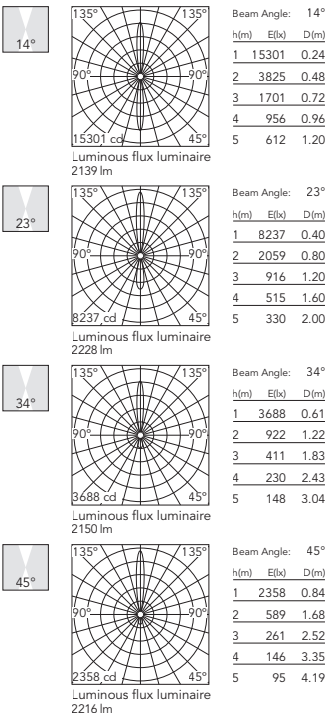


C1 Double Spot Wall Large

Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen

Required Accessories

<p>Trimless installation frame for wall mounting.</p> <p>Wall type:</p> <p>Drywall - max 1" thickness Mud in required</p>	<p>Aluminum mount for surface flush installation (wall).</p> <p>Wall type:</p> <p>Drywall / Stone / Concrete / Wood / Metal</p>	
<p>08.0226.00A9S</p>	<p>08.0254.00A9S</p>	
		



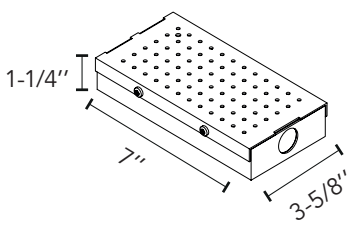


















Required Drivers

<p>Splice Box 40W, 1 dim, 0-10V, 1200mA 120/277V. Size: 7" x 3.59" x 1.25"</p>	
<p>SP40W1200MA-10V-A01</p>	
	

C1 Double Spot Wall Large

Wall Installation Adjustable Spotlight Designed by Vincent Van Duysen

How to order C1

		SURFACE					RECESSED			
		SMALL			LARGE		SMALL		LARGE	
		Ceiling	Wall	Wall flush	Ceiling	Wall flush	Ceiling	Wall	Ceiling	Wall
Mono Spot										
										
										
Double Spot	