



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Description


Zero Track Pro stands out with its ease of installation on surfaces, as well as with its minimized dimensions and minimalist aesthetics where, once integrated into the space, the eye cannot tell whether the line of the profile is on the surface or recessed into the ceiling/wall instead.

Its reduced dimensions also hold the technology to control adjustment with protocols that allow professional management of appliances through data paths or wirelessly (either in broadcast mode or individually, point to point).




Recessed Installation

Recessed Reinforced

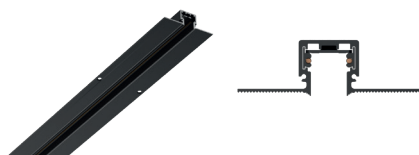

Light Modules

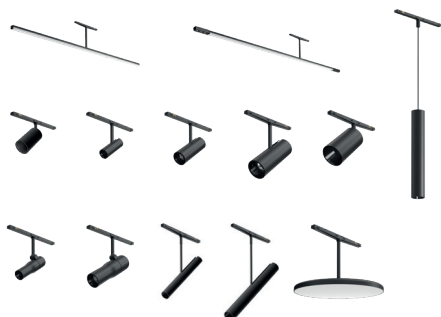

Certifications



Class 2

Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

| | |
|-------------------|------------------|
| System Lamp Type | LED |
| Color Temperature | 2700K, 3000K |
| Color Rendering | CRI90 |
| Application | General Lighting |

Physical

| | |
|---------------------------|--------------|
| Material | Aluminum |
| Ingress Protection Rating | IP20 |
| Finishes | ■ 14 = Black |
| Installation type | Recessed |
| Environment | Indoor |
| Field cuttable | Yes |

Electrical & Control

| | |
|-----------------------|---------------------------------------|
| Driver location | Remote |
| Driver Input Voltage | 120V-277V |
| Driver Output Voltage | 24V |
| Control | Non Dimmable / Dali / 1-10V / Casambi |



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Notes

Wattage per linear foot is dependent upon quantity and type of light modules used.

Contractor to supply wire from driver to luminaire. Drivers should be installed in a suitable electrical enclosure (by others), and an accessible location.

Remote power supply


0-10V dimming control unit is not included. Compatible dimmers to be used must be "active 0-10V" or employ the Dim Control Unit (DCU).

The maximum length that can be fed with a single 96W driver is 19'-6", however voltage drop may limit actual lengths to shorter runs. Consult factory for specific application assistance.


3500K and other CCTs are available but not cataloged. Consult factory.

Recessed Installation

Recessed Reinforced

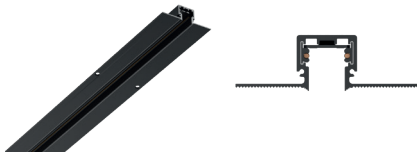

Light Modules

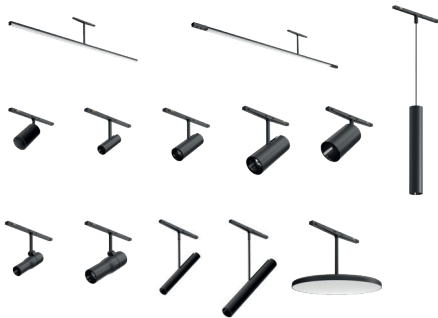

Certifications



Class 2


Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Installation






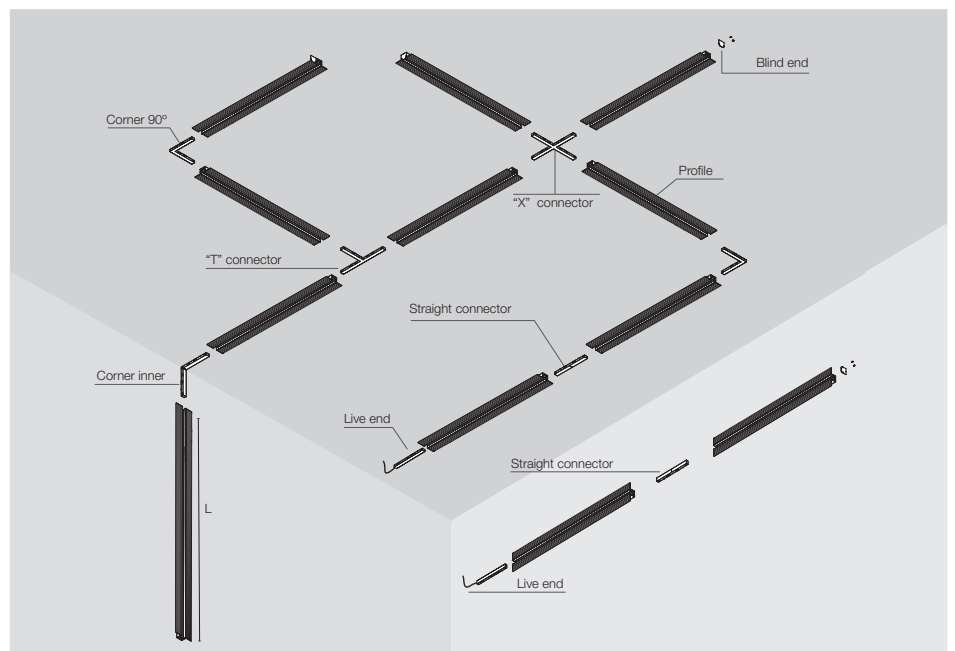


Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Profiles

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.
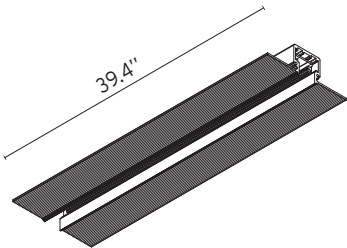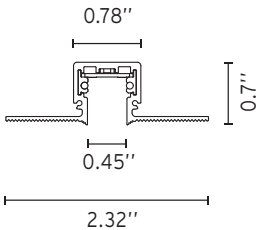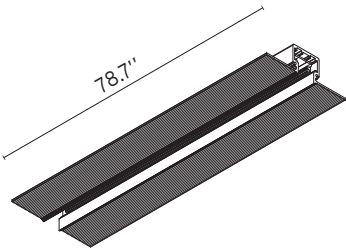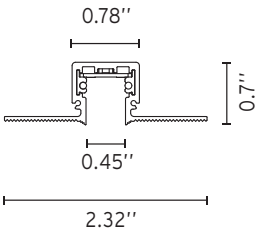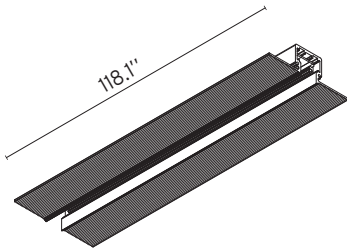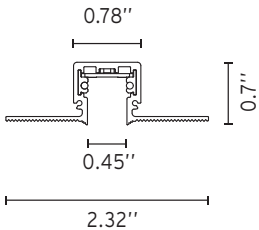
| 39.4" [1 m] Profile | 78.7" [2 m] Profile | 118.1" [3 m] Profile |
|--|--|--|
| Part Number: | Part Number: | Part Number: |
| Dimmable Non Dimmable | Dimmable Non Dimmable | Dimmable Non Dimmable |
| ■ 06.0450.14 ■ 06.0453.14 | ■ 06.0451.14 ■ 06.0454.14 | ■ 06.0452.14 ■ 06.0455.14 |
|   |   |   |

Zero Track Pro Recessed


High-tech LED lighting system for interior architecture

Power Supply

LED Driver, 24VDC, 60W, Non-Dimming,
120-277V

Part Number:


LEDSB60W24V-NDM-D1



LED Driver, 24VDC, 96W, Non-Dimming,
120-277V

Part Number:

LEDSB96W24V-NDM-D1




Dimming controllers

Dimming Control Unit Box 24V - 48V
0-10V Required for a 0-10V Dimming
installation. 1 Dimming control can
control up to 20 fixtures

Part Number:

■ 08.0613.14A

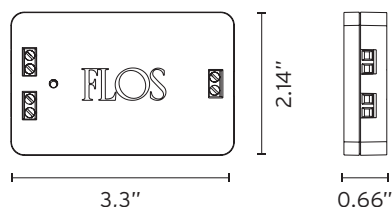

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture


Connectors

Live End Feed

Feed unit for remote power supply unit.
Power cable inserting is possible both
from the Rear and the side. Access from
above required.

Part Number:

06.0456.14

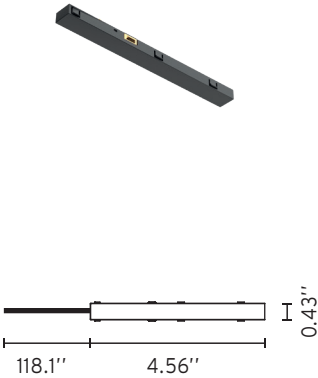


T Connector

T-shaped connector with no feed entry.

Part Number:

06.0459.14.90

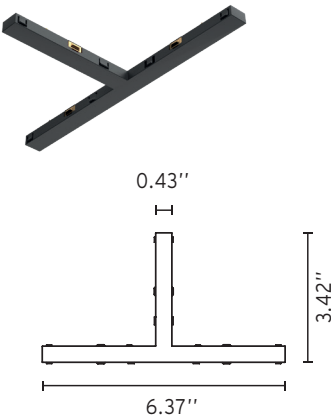

X Connector

Cross-shaped connector with no feed entry.

Part Number:

06.0460.14.90




Straight Connector

Intermediate connector with no feed entry.

Part Number:

06.2608.14




Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Corners


90° Corner
90° flat corner with no feed entry.

Part Number:
■ 06.0457.14



Inner Corner
Ceiling/wall - wall/wall inner corner with no feed entry.


Part Number:
■ 06.0458.14

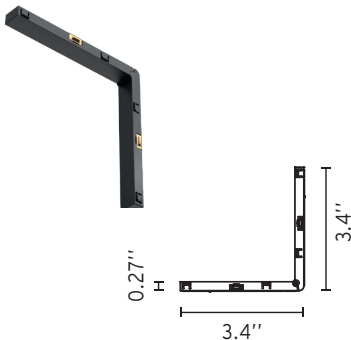

Accessories

Blind End
End Cap. 2 unit kit.

Part Number:
■ 06.0461.14



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 0 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical specifications and color options for the Zero Track Pro Recessed lighting fixture. Includes dimensions (2.9", 1.08", 2.6", 1.9", 0.9", 6.3") and color swatches (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze). Notes include: Non Dimmable, CB = Casambi, DA = Dali, 1V = 1-10V.

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|--|---|
| 2700 | 90 | 276 | 169 | 3.5W | 15° | 05.5100 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V• CB = Casambi | <div><div>15°</div><div>Beam Angle: 15° h(m) E(h) D(m) 1 1925 0.26 2 481 0.52 3 214 0.77 4 120 1.03 5 77 1.29 Luminous flux luminaire 169 lm</div></div> |
| 3000 | 90 | 302 | 183 | 3.5W | 15° | 05.5105 | | | <div><div>15°</div><div>Beam Angle: 15° h(m) E(h) D(m) 1 2085 0.26 2 521 0.52 3 232 0.77 4 130 1.03 5 83 1.29 Luminous flux luminaire 183 lm</div></div> |
| 2700 | 90 | 276 | 179 | 3.5W | 25° | 05.5101 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V• CB = Casambi | <div><div>25°</div><div>Beam Angle: 25° h(m) E(h) D(m) 1 928 0.45 2 232 0.89 3 103 1.34 4 58 1.79 5 37 2.23 Luminous flux luminaire 179 lm</div></div> |
| 3000 | 90 | 302 | 194 | 3.5W | 25° | 05.5106 | | | <div><div>25°</div><div>Beam Angle: 25° h(m) E(h) D(m) 1 1006 0.45 2 251 0.89 3 112 1.34 4 53 1.79 5 40 2.23 Luminous flux luminaire 194 lm</div></div> |

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 1 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical specifications and color options for the Zero Track Pro Recessed lighting fixture. Includes dimensions (2.9", 0.7", 3.4", 1.9", 6.3", 0.7", 3.4", 1.9", 1.2") and color options (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze). Also lists features: Non Dimmable, CB = Casambi, DA = Dali, 1V = 1-10V.

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|--|
| 2700 | 90 | 432 | 309 | 5.5W | 14° | 05.5110 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali, 1V = 1-10V, CB = Casambi | 14° beam spread diagram with luminous flux data. |
| 3000 | 90 | 446 | 314 | 5.5W | 14° | 05.5115 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali, 1V = 1-10V, CB = Casambi | 14° beam spread diagram with luminous flux data. |
| 2700 | 90 | 432 | 284 | 5.5W | 20° | 05.5111 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali, 1V = 1-10V, CB = Casambi | 20° beam spread diagram with luminous flux data. |
| 3000 | 90 | 446 | 289 | 5.5W | 20° | 05.5116 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali, 1V = 1-10V, CB = Casambi | 20° beam spread diagram with luminous flux data. |


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 2 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

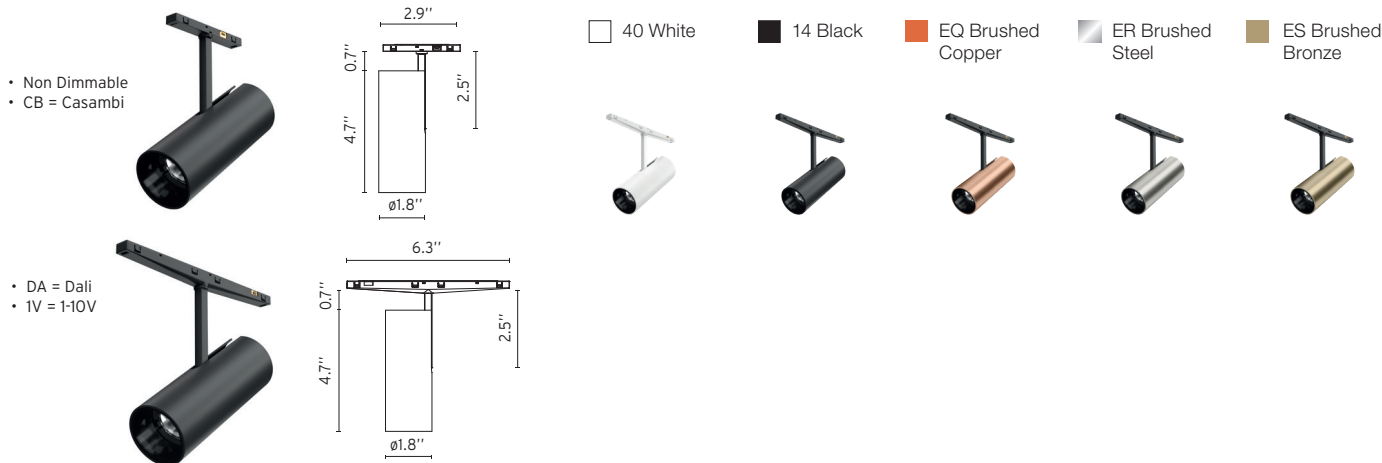

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|---|
| 2700 | 90 | 724 | 479 | 10.5W | 10° | 05.5120 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 10° Luminous flux luminaire 479 lm</p> |
| 3000 | 90 | 781 | 531 | 10.5W | 10° | 05.5125 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 10° Luminous flux luminaire 531 lm</p> |
| 2700 | 90 | 724 | 441 | 10.5W | 19° | 05.5121 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 19° Luminous flux luminaire 441 lm</p> |
| 3000 | 90 | 781 | 489 | 10.5W | 19° | 05.5126 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 19° Luminous flux luminaire 489 lm</p> |
| 2700 | 90 | 724 | 364 | 10.5W | 32° | 05.5122 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 32° Luminous flux luminaire 364 lm</p> |
| 3000 | 90 | 781 | 404 | 10.5W | 32° | 05.5127 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | <p>Beam Angle: 32° Luminous flux luminaire 404 lm</p> |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 1 Suspension - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical specifications and color options for the Find Me 1 Suspension fixture. Includes dimensions (2.9", 6.3", 118.1", 8.6", ø1.2") and color swatches (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze).

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|--|
| 2700 | 90 | 432 | 309 | 5.5W | 14° | 05.5130 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | 14° beam angle diagram showing luminous flux and beam diameter data. |
| 3000 | 90 | 446 | 314 | 5.5W | 14° | 05.5135 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | 14° beam angle diagram showing luminous flux and beam diameter data. |
| 2700 | 90 | 432 | 186 | 5.5W | 20° | 05.5131 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | 20° beam angle diagram showing luminous flux and beam diameter data. |
| 3000 | 90 | 446 | 193 | 5.5W | 20° | 05.5136 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi | 20° beam angle diagram showing luminous flux and beam diameter data. |


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Magic Stick - Designed by Jorge Herrera

LED diffuse lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its central line. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

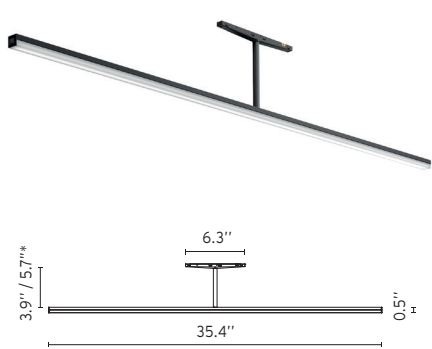

*Custom Rod available

- 40 White
- 14 Black
- EQ Brushed Copper
- ER Brushed Steel
- ES Brushed Bronze



Magic Stick 100

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Rod | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|---------------|------|-------------|--|---|-------------|
| 2700 | 90 | 1160 | 587 | 10.5W | 131° diffuser | 3.9" | 05.3200 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | |
| 3000 | 90 | 1201 | 608 | 10.5W | 131° diffuser | 3.9" | 05.3201 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | | |

Magic Stick 145

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Rod | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|---------------|------|-------------|--|---|-------------|
| 2700 | 90 | 1160 | 587 | 10.5W | 131° diffuser | 5.7" | 05.3220 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | |
| 3000 | 90 | 1201 | 608 | 10.5W | 131° diffuser | 5.7" | 05.3221 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | | |




Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Magic Stick Asymmetric - Designed by Jorge Herrera

LED diffuse lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its central line. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

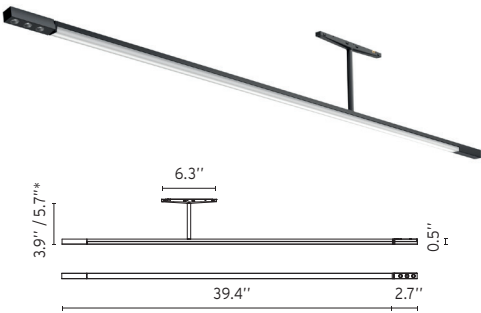









*Custom Rod available

- 40 White
- 14 Black
- EQ Brushed Copper
- ER Brushed Steel
- ES Brushed Bronze



Magic Stick 100 Asymmetric

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Rod | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------------------|------|-------------|---|---|---|
| 2700 | 90 | 1160 | 587 | 12W | 131° Linear 17° Spot | 3.9" | 05.3210 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> | <div><div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 675 0.29 2 169 0.59 3 75 0.88 4 42 1.18 5 27 1.47 Luminous flux luminaire 136 lm</div></div></div><div><div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 153 4.3 2 38 8.4 3 17 13.6 4 10 17.3 5 6 21.7 Luminous flux luminaire 587 lm</div></div></div></div></div> |
| | | | | | | | | <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | | <div><div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div><div><div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.3 2 40 8.4 3 18 13.6 4 10 17.3 5 6 21.7 Luminous flux luminaire 608 lm</div></div></div></div></div> |
| 3000 | 90 | 1201 | 608 | 12W | 131° Linear 17° Spot | 3.9" | 05.3211 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> | <div><div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div><div><div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.3 2 40 8.4 3 18 13.6 4 10 17.3 5 6 21.7 Luminous flux luminaire 608 lm</div></div></div></div></div> |
| | | | | | | | | <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | | <div><div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div><div><div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.3 2 40 8.4 3 18 13.6 4 10 17.3 5 6 21.7 Luminous flux luminaire 608 lm</div></div></div></div></div> |

• Non Dimmable

• DA = Dali

• 1V = 1-10V

Magic Stick 145 Asymmetric

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Rod | Part Number | Finish | Dimming Protocol | Photometric | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|-------|----------------|------------------|-------|-------------------------|------|-------------|---|--|--|-------|-------|------|-----|------|------|-----|------|------|----|------|------|----|------|------|----|------|--|--|-------|-------|------|-----|-----|-----|----|-----|-----|----|------|------|----|------|------|---|------|------|
| 2700 | 90 | 1160 | 587 | 12W | 131° Linear 17° Spot | 5.7" | 05.3230 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> | <div><div></div>• Non Dimmable</div> <div><div></div>• DA = Dali</div> <div><div></div>• 1V = 1-10V</div> | <div><div>Spot</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>675</td><td>0.29</td></tr><tr><td>2</td><td>169</td><td>0.59</td></tr><tr><td>3</td><td>75</td><td>0.88</td></tr><tr><td>4</td><td>42</td><td>1.18</td></tr><tr><td>5</td><td>27</td><td>1.47</td></tr></tbody></table>Luminous flux luminaire 136 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 675 | 0.29 | 2 | 169 | 0.59 | 3 | 75 | 0.88 | 4 | 42 | 1.18 | 5 | 27 | 1.47 | <div><div>Linear</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>153</td><td>4.3</td></tr><tr><td>2</td><td>38</td><td>8.6</td></tr><tr><td>3</td><td>17</td><td>13.0</td></tr><tr><td>4</td><td>10</td><td>17.3</td></tr><tr><td>5</td><td>6</td><td>21.7</td></tr></tbody></table>Luminous flux luminaire 587 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 153 | 4.3 | 2 | 38 | 8.6 | 3 | 17 | 13.0 | 4 | 10 | 17.3 | 5 | 6 | 21.7 |
| | | | | | | | | h(m) | | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 675 | 0.29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 169 | 0.59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 75 | 0.88 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 42 | 1.18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 27 | 1.47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 153 | 4.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 38 | 8.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 17 | 13.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 10 | 17.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 6 | 21.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 1201 | 608 | 12W | 131° Linear 17° Spot | 5.7" | 05.3231 | <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>Spot</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>698</td><td>0.29</td></tr><tr><td>2</td><td>174</td><td>0.59</td></tr><tr><td>3</td><td>78</td><td>0.88</td></tr><tr><td>4</td><td>44</td><td>1.18</td></tr><tr><td>5</td><td>28</td><td>1.47</td></tr></tbody></table>Luminous flux luminaire 140 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 698 | 0.29 | 2 | 174 | 0.59 | 3 | 78 | 0.88 | 4 | 44 | 1.18 | 5 | 28 | 1.47 | <div><div>Linear</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>158</td><td>4.3</td></tr><tr><td>2</td><td>40</td><td>8.6</td></tr><tr><td>3</td><td>18</td><td>13.0</td></tr><tr><td>4</td><td>10</td><td>17.3</td></tr><tr><td>5</td><td>6</td><td>21.7</td></tr></tbody></table>Luminous flux luminaire 608 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 158 | 4.3 | 2 | 40 | 8.6 | 3 | 18 | 13.0 | 4 | 10 | 17.3 | 5 | 6 | 21.7 | |
| | | | | | | | | h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 698 | 0.29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 174 | 0.59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 78 | 0.88 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 44 | 1.18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 28 | 1.47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 158 | 4.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 40 | 8.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 18 | 13.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 10 | 17.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 6 | 21.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

• Non Dimmable

• DA = Dali

• 1V = 1-10V

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 90 - Designed by Piero Lissoni

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).

Technical specifications and color options for the Atom 90 fixture. Includes dimensions (2.9", 1.9", 3.5", 1.04", 6.3", 0.9") and color swatches (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze). Features include Non Dimmable, CB = Casambi, DA = Dali, and 1V = 1-10V.

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|---|
| 2700 | 90 | 432 | 224 | 5.5W | 14° | 05.5140 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi | Beam Angle: 14° Luminous flux luminaire 224 lm |
| 3000 | 90 | 446 | 247 | 5.5W | 14° | 05.5145 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi | Beam Angle: 14° Luminous flux luminaire 247 lm |
| 2700 | 90 | 432 | 261 | 5.5W | 25° | 05.5141 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi | Beam Angle: 25° Luminous flux luminaire 261 lm |
| 3000 | 90 | 446 | 289 | 5.5W | 25° | 05.5146 | 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze | Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi | Beam Angle: 25° Luminous flux luminaire 289 lm |

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.





Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 120 - Designed by Piero Lissoni

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|--|---|
| 2700 | 90 | 600 | 433 | 8W | 14° | 05.5150 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div></div>• Non Dimmable</div> <div><div></div>• DA = Dali 2</div> <div><div></div>• 1V = 1-10V</div> <div><div></div>• CB = Casambi</div> | <div><div><div>14°</div><div>Beam Angle: 14° h(m) E(lx) D(m) 1 5839 0.24 2 1460 0.48 3 649 0.72 4 365 0.95 5 234 1.19 Luminous flux luminaire 433 lm</div></div></div> |
| 3000 | 90 | 648 | 440 | 8W | 14° | 05.5155 | | | <div><div><div>14°</div><div>Beam Angle: 14° h(m) E(lx) D(m) 1 5879 0.24 2 1470 0.49 3 653 0.73 4 367 0.97 5 235 1.21 Luminous flux luminaire 440 lm</div></div></div> |
| 2700 | 90 | 600 | 364 | 8W | 20° | 05.5151 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div></div>• Non Dimmable</div> <div><div></div>• DA = Dali 2</div> <div><div></div>• 1V = 1-10V</div> <div><div></div>• CB = Casambi</div> | <div><div><div>20°</div><div>Beam Angle: 20° h(m) E(lx) D(m) 1 2557 0.35 2 639 0.70 3 284 1.06 4 160 1.41 5 102 1.76 Luminous flux luminaire 364 lm</div></div></div> |
| 3000 | 90 | 648 | 373 | 8W | 20° | 05.5156 | | | <div><div><div>20°</div><div>Beam Angle: 20° h(m) E(lx) D(m) 1 2621 0.35 2 655 0.70 3 291 1.06 4 164 1.41 5 105 1.76 Luminous flux luminaire 373 lm</div></div></div> |

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 200 - Designed by Piero Lissoni

LED general lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).

Product images and specifications for the Atom 200 recessed lighting fixture. It includes two views of the fixture with dimensions: a top view showing a diameter of 7.5 inches and a height of 5.1 inches, and a side view showing a mounting arm length of 2.9 inches. The fixture is available in five finishes: 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, and ES Brushed Bronze. It is non-dimmable and compatible with the Casambi control system.

| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|---------------|-------------|--|---|-------------|
| 2700 | 90 | 1005 | 395 | 10.5W | 110° diffuser | 05.5160 | <div> <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> </div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali 2 1V = 1-10V CB = Casambi | |
| 3000 | 90 | 1080 | 424 | 10.5W | 110° diffuser | 05.5161 | <div> <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> </div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali 2 1V = 1-10V CB = Casambi | |


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Stripe

LED diffuse lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Length | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|---------------|-------------------------|-------------|----------|---|-------------|
| 2700 | 90 | 555 | 259 | 7W | 115° diffuser | Light Stripe 600 24.2" | 05.5290 | 14 Black | <ul style="list-style-type: none"> Non Dimmable 1V = 1-10V DA = Dali 2 | |
| 3000 | 90 | 582 | 272 | 7W | 115° diffuser | Light Stripe 900 36" | 05.5291 | | | |
| 2700 | 90 | 1111 | 518 | 10W | 115° diffuser | Light Stripe 1200 47.8" | 05.5292 | | | |
| 3000 | 90 | 1166 | 544 | 10W | 115° diffuser | Light Stripe 600 24.2" | 05.5293 | 14 Black | <ul style="list-style-type: none"> Non Dimmable 1V = 1-10V DA = Dali 2 | |
| 2700 | 90 | 1667 | 777 | 13.5W | 115° diffuser | Light Stripe 900 36" | 05.5294 | | | |
| 3000 | 90 | 1750 | 816 | 13.5W | 115° diffuser | Light Stripe 1200 47.8" | 05.5295 | | | |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Shadow Spot 30

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

| | | | | | | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | | | | |
|------|-----|----------------|------------------|-------|-------------|---|---|--|-------------------------|--|
| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric | |
| 2700 | 90 | 257 | 209 | 4W | 10° | 05.5170 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <div>• Non Dimmable</div> <div>• DA = Dali</div> <div>• 1V = 1-10V</div> | <div></div> <div></div> | |
| 3000 | 90 | 263 | 214 | 4W | 10° | 05.5175 | | | <div></div> <div></div> | |
| 2700 | 90 | 257 | 201 | 4W | 22° | 05.5171 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <div>• Non Dimmable</div> <div>• DA = Dali</div> <div>• 1V = 1-10V</div> | <div></div> <div></div> | |
| 3000 | 90 | 263 | 205 | 4W | 22° | 05.5176 | | | <div></div> <div></div> | |
| 2700 | 90 | 257 | 200 | 4W | 33° | 05.5172 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <div>• Non Dimmable</div> <div>• DA = Dali</div> <div>• 1V = 1-10V</div> | <div></div> <div></div> | |
| 3000 | 90 | 263 | 204 | 4W | 33° | 05.5177 | | | <div></div> <div></div> | |
| 2700 | 90 | 257 | 209 | 4W | 46° | 05.5173 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <div>• Non Dimmable</div> <div>• DA = Dali</div> <div>• 1V = 1-10V</div> | <div></div> <div></div> | |
| 3000 | 90 | 263 | 214 | 4W | 46° | 05.5178 | | | <div></div> <div></div> | |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Optional Accessories - Light Shadow Spot 30

| | | |
|---|---|---|
| Honeycomb | CCT Increaser Filter D58 2700K >> 3125±75K 3000K >> 3600±75K | CCT Decreaser Filter D12 2700K >> 2450±75K 3000K >> 2700±75K |
| Part Number: 08.0790.00 | Part Number: 08.0791.00 | Part Number: 08.0792.00 |
|  |  |  |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Shadow Spot 45

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.






| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|---|
| 2700 | 90 | 799 | 650 | 10W | 15° | 05.5180 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 15° h(m) E(lx) D(dm) 1 8012 0.27 2 2003 0.54 3 890 0.80 4 501 1.07 5 320 1.34 Luminous flux luminaire 550 lm |
| 3000 | 90 | 844 | 686 | 10W | 15° | 05.5185 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 15° h(m) E(lx) D(dm) 1 8456 0.27 2 2114 0.54 3 940 0.80 4 528 1.07 5 338 1.34 Luminous flux luminaire 586 lm |
| 2700 | 90 | 799 | 645 | 10W | 21° | 05.5181 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 21° h(m) E(lx) D(dm) 1 5163 0.36 2 1291 0.73 3 574 1.09 4 323 1.46 5 207 1.82 Luminous flux luminaire 645 lm |
| 3000 | 90 | 844 | 682 | 10W | 21° | 05.5186 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 21° h(m) E(lx) D(dm) 1 5459 0.36 2 1365 0.73 3 507 1.09 4 341 1.46 5 218 1.82 Luminous flux luminaire 582 lm |
| 2700 | 90 | 799 | 646 | 10W | 31° | 05.5182 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 31° h(m) E(lx) D(dm) 1 2296 0.56 2 574 1.11 3 255 1.67 4 144 2.22 5 92 2.78 Luminous flux luminaire 646 lm |
| 3000 | 90 | 844 | 682 | 10W | 31° | 05.5187 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • 1V = 1-10V | Beam Angle: 31° h(m) E(lx) D(dm) 1 2424 0.56 2 506 1.11 3 269 1.67 4 152 2.22 5 97 2.78 Luminous flux luminaire 582 lm |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Optional Accessories - Light Shadow Spot 45

| | | |
|---|---|---|
| Honeycomb | CCT Increaser Filter D58 2700K >> 3125±75K 3000K >> 3600±75K | CCT Decreaser Filter D12 2700K >> 2450±75K 3000K >> 2700±75K |
| Part Number: 08.0793.00 | Part Number: 08.0794.00 | Part Number: 08.0795.00 |
|  |  |  |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 25 Short

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|---|
| 2700 | 90 | 257 | 167 | 4.7W | 11° | 05.5300 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 11° h(m) E(lx) D(m) 1 2870 0.20 2 717 0.40 3 319 0.60 4 179 0.80 5 115 1.00 Luminous flux luminaire 167 lm</div> |
| | | 232 | 151 | 3.8W | | | | | |
| 3000 | 90 | 265 | 172 | 4.7W | 11° | 05.5305 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 11° h(m) E(lx) D(m) 1 2955 0.20 2 739 0.40 3 328 0.60 4 185 0.80 5 118 1.00 Luminous flux luminaire 172 lm</div> |
| | | 239 | 155 | 3.8W | | | | | |
| 2700 | 90 | 257 | 173 | 4.7W | 25° | 05.5301 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 25° h(m) E(lx) D(m) 1 883 0.44 2 221 0.87 3 98 1.31 4 55 1.75 5 35 2.18 Luminous flux luminaire 173 lm</div> |
| | | 232 | 156 | 3.8W | | | | | |
| 3000 | 90 | 265 | 178 | 4.7W | 25° | 05.5306 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 25° h(m) E(lx) D(m) 1 908 0.44 2 227 0.87 3 101 1.31 4 57 1.75 5 36 2.18 Luminous flux luminaire 178 lm</div> |
| | | 239 | 160 | 3.8W | | | | | |
| 2700 | 90 | 257 | 170 | 4.7W | 40° | 05.5302 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 40° h(m) E(lx) D(m) 1 422 0.72 2 106 1.45 3 47 2.17 4 26 2.90 5 17 3.62 Luminous flux luminaire 170 lm</div> |
| | | 232 | 153 | 3.8W | | | | | |
| 3000 | 90 | 265 | 175 | 4.7W | 40° | 05.5307 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <div>Beam Angle: 40° h(m) E(lx) D(m) 1 435 0.72 2 109 1.45 3 48 2.17 4 27 2.90 5 17 3.62 Luminous flux luminaire 175 lm</div> |
| | | 239 | 158 | 3.8W | | | | | |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 25 Long

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|---|---|-------------|
| 2700 | 90 | 257 | 167 | 4.7W | 11° | 05.5310 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 232 | 151 | 3.8W | | | | | |
| 3000 | 90 | 265 | 172 | 4.7W | 11° | 05.5315 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 239 | 155 | 3.8W | | | | | |
| 2700 | 90 | 257 | 173 | 4.7W | 25° | 05.5311 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 232 | 156 | 3.8W | | | | | |
| 3000 | 90 | 265 | 178 | 4.7W | 25° | 05.5316 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 239 | 160 | 3.8W | | | | | |
| 2700 | 90 | 257 | 170 | 4.7W | 40° | 05.5312 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 232 | 153 | 3.8W | | | | | |
| 3000 | 90 | 265 | 175 | 4.7W | 40° | 05.5317 | <div>40 White</div> <div>14 Black</div> <div>EQ Brushed Copper</div> <div>ER Brushed Steel</div> <div>ES Brushed Bronze</div> | <ul style="list-style-type: none"> Non Dimmable DA = Dali TV = 1-10V CB = Casambi | |
| | | 239 | 158 | 3.8W | | | | | |

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 35 Short

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|--|
| 2700 | 90 | 756 | 580 | 11W | 15° | 05.5320 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 15° 1 7675 0.27 2 1919 0.53 3 853 0.80 4 480 1.07 5 307 1.34 Luminous flux luminaire 580 lm</p> |
| | | 639 | 490 | 8W | | | | | |
| 3000 | 90 | 799 | 613 | 11W | 15° | 05.5325 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 15° 1 8112 0.27 2 2028 0.53 3 901 0.80 4 507 1.07 5 324 1.34 Luminous flux luminaire 513 lm</p> |
| | | 675 | 518 | 8W | | | | | |
| 2700 | 90 | 756 | 642 | 11W | 21° | 05.5321 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 21° 1 5279 0.38 2 1320 0.75 3 587 1.13 4 330 1.51 5 211 1.88 Luminous flux luminaire 542 lm</p> |
| | | 639 | 543 | 8W | | | | | |
| 3000 | 90 | 799 | 679 | 11W | 21° | 05.5326 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 21° 1 5583 0.38 2 1396 0.75 3 520 1.13 4 349 1.51 5 223 1.88 Luminous flux luminaire 579 lm</p> |
| | | 675 | 573 | 8W | | | | | |
| 2700 | 90 | 756 | 641 | 11W | 32° | 05.5322 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 32° 1 1998 0.58 2 500 1.16 3 222 1.75 4 125 2.33 5 80 2.91 Luminous flux luminaire 541 lm</p> |
| | | 639 | 542 | 8W | | | | | |
| 3000 | 90 | 799 | 677 | 11W | 32° | 05.5327 | 40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze | • Non Dimmable • DA = Dali • IV = 1-10V • CB = Casambi | <p>Beam Angle: 32° 1 2110 0.58 2 528 1.16 3 234 1.75 4 132 2.33 5 84 2.91 Luminous flux luminaire 577 lm</p> |
| | | 675 | 572 | 8W | | | | | |






Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 35 Long

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



| CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Dimming Protocol | Photometric |
|------|-----|----------------|------------------|-------|-------------|-------------|--|---|---|
| 2700 | 90 | 756 | 580 | 11W | 15° | 05.5330 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>15°</div></div><div>Beam Angle: 15° 1 7675 9.27 2 1919 9.53 3 853 9.80 4 480 1.07 5 307 1.34</div><div>Luminous flux luminaire 580 lm</div></div> |
| | | 639 | 490 | 8W | | | | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>15°</div></div><div>Beam Angle: 15° 1 8112 9.27 2 2028 9.53 3 901 9.80 4 507 1.07 5 324 1.34</div><div>Luminous flux luminaire 513 lm</div></div> |
| 2700 | 90 | 756 | 642 | 11W | 21° | 05.5331 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>21°</div></div><div>Beam Angle: 21° 1 5279 9.38 2 1320 9.75 3 587 1.13 4 330 1.51 5 211 1.88</div><div>Luminous flux luminaire 542 lm</div></div> |
| | | 639 | 543 | 8W | | | | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>21°</div></div><div>Beam Angle: 21° 1 5583 9.38 2 1396 9.75 3 620 1.13 4 349 1.51 5 223 1.88</div><div>Luminous flux luminaire 579 lm</div></div> |
| 3000 | 90 | 799 | 613 | 11W | 15° | 05.5335 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>15°</div></div><div>Beam Angle: 15° 1 7675 9.27 2 1919 9.53 3 853 9.80 4 480 1.07 5 307 1.34</div><div>Luminous flux luminaire 580 lm</div></div> |
| | | 675 | 518 | 8W | | | | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>15°</div></div><div>Beam Angle: 15° 1 8112 9.27 2 2028 9.53 3 901 9.80 4 507 1.07 5 324 1.34</div><div>Luminous flux luminaire 513 lm</div></div> |
| 2700 | 90 | 756 | 642 | 11W | 21° | 05.5331 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>21°</div></div><div>Beam Angle: 21° 1 5279 9.38 2 1320 9.75 3 587 1.13 4 330 1.51 5 211 1.88</div><div>Luminous flux luminaire 542 lm</div></div> |
| | | 639 | 543 | 8W | | | | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>21°</div></div><div>Beam Angle: 21° 1 5583 9.38 2 1396 9.75 3 620 1.13 4 349 1.51 5 223 1.88</div><div>Luminous flux luminaire 579 lm</div></div> |
| 3000 | 90 | 799 | 677 | 11W | 32° | 05.5337 | <div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>32°</div></div><div>Beam Angle: 32° 1 1998 9.58 2 500 1.16 3 222 1.75 4 125 2.33 5 80 2.91</div><div>Luminous flux luminaire 541 lm</div></div> |
| | | 675 | 572 | 8W | | | | <div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div> <div>• CB = Casambi</div> | <div><div><div>32°</div></div><div>Beam Angle: 32° 1 2110 9.58 2 528 1.16 3 234 1.75 4 132 2.33 5 84 2.91</div><div>Luminous flux luminaire 577 lm</div></div> |