

Light Shadow Mini Adjustable No Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	3.5 W
Initial Lumens	384 lm / 404 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Adjustable
Weight	0.39 Lbs
Ingress Protection Rating	IP55

Finishes:

 White/White

 White/Black

 White/Steel

 White/Bronze



 Black/White

 Black/Black

 Black/Steel


 Black/Bronze



Installation type Ceiling Recessed

Environment Indoor

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty


2 years from date of sale.

Light Shadow Mini Adjustable No Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight



Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Electrical & Control

Driver Input Voltage	120V - 277V
Control	0-10V, Dali, Triac, Push
Driver	Remote - Order Separately
Current	300mA
Vf	11.6V

Performance

Delivered Lumens	up to 368 lm.
Efficacy	up to 105 W

Notes

Integral LED board is not field replaceable.


IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Mini Adjustable No Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight

How to specify

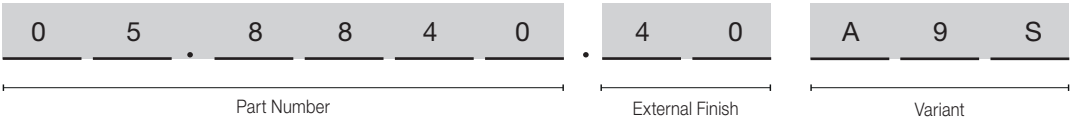


How to Specify							
ex. 03.8840.40.A9S							
.A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	384	3.5	14°	05.8840	14 Black	40 White
					05.8841		14 Black
					05.8843		ER Steel
					05.8844		ES Bronze
3000	90	404	3.5	14°	05.8860	14 Black	40 White
					05.8861		14 Black
					05.8863		ER Steel
					05.8864		ES Bronze
2700	90	384	3.5	26°	05.8845	14 Black	40 White
					05.8846		14 Black
					05.8848		ER Steel
					05.8849		ES Bronze
3000	90	404	3.5	26°	05.8865	14 Black	40 White
					05.8866		14 Black
					05.8868		ER Steel
					05.8869		ES Bronze
3000	90	384	3.5	37°	05.8850	14 Black	40 White
					05.8851		14 Black
					05.8853		ER Steel
					05.8854		ES Bronze
3000	90	404	3.5	37°	05.8870	14 Black	40 White
					05.8871		14 Black
					05.8873		ER Steel
					05.8874		ES Bronze

Light Shadow Mini Adjustable No Trim 4 Spots IC Rated


Ceiling Recessed Fixed Downlight

Photometrics


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT



3000 K - MEDIUM





3000 K - FLOOD



Required Aecessories

Frame No Trim Fixed 4L


08.1059.00



Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

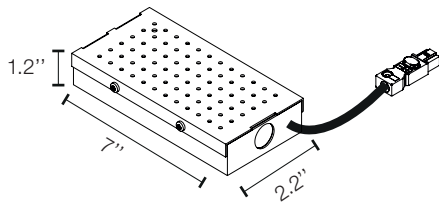

Minimum: 1
Maximum: 2

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

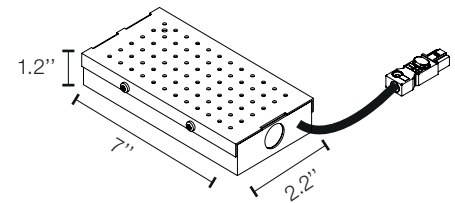

Minimum: 1
Maximum: 2