




Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Fixed No Trim 2 Spots IC Rated

Ceiling Recessed Fixed Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	1.75 W
Initial Lumens	192 lm / 202 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Fixed
Weight	0.26 Lbs
Ingress Protection Rating	IP55

Finishes:  White/White  White/Black  White/Steel  White/Bronze



 Black/White


 Black/Black

 Black/Steel


 Black/Bronze



Installation type	Ceiling Recessed
Environment	Indoor

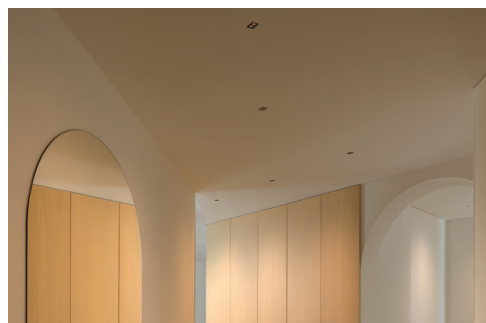

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Fixed No Trim 2 Spots IC Rated

Ceiling Recessed Fixed Downlight

Electrical & Control

Driver Input Voltage	120V - 277V
Control	0-10V, Dali, Triac, Push
Driver	Remote - Order Separately
Current	300mA
Vf	6V

Performance

Delivered Lumens	up to 184 lm.
Efficacy	up to 105 W

Notes

Integral LED board is not field replaceable.


IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Mini Fixed No Trim 2 Spots IC Rated

Ceiling Recessed Fixed Downlight

How to specify

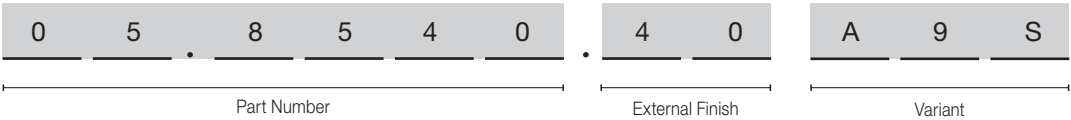


How to Specify							
ex. 03.8540.40.A9S .A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	192	1.75	14°	05.8540	40 White 14 Black 40 White	40 White
					05.8541		14 Black
					05.8543		ER Steel
					05.8544		ES Bronze
3000	90	202	1.75	14°	05.8560	40 White 14 Black 40 White	40 White
					05.8561		14 Black
					05.8563		ER Steel
					05.8564		ES Bronze
2700	90	192	1.75	26°	05.8545	40 White 14 Black 40 White	40 White
					05.8546		14 Black
					05.8548		ER Steel
					05.8549		ES Bronze
3000	90	202	1.75	26°	05.8565	40 White 14 Black 40 White	40 White
					05.8566		14 Black
					05.8568		ER Steel
					05.8569		ES Bronze
3000	90	192	1.75	37°	05.8550	40 White 14 Black 40 White	40 White
					05.8551		14 Black
					05.8553		ER Steel
					05.8554		ES Bronze
3000	90	202	1.75	37°	05.8570	40 White 14 Black 40 White	40 White
					05.8571		14 Black
					05.8573		ER Steel
					05.8574		ES Bronze

Light Shadow Mini Fixed No Trim 2 Spots IC Rated


Ceiling Recessed Fixed Downlight

Photometrics


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT



3000 K - MEDIUM




3000 K - FLOOD



Required Aecessories

Frame No Trim Fixed


08.1056.00

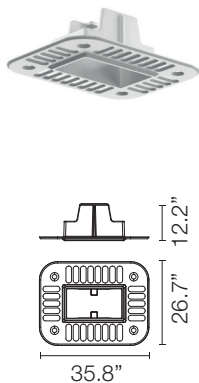

Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

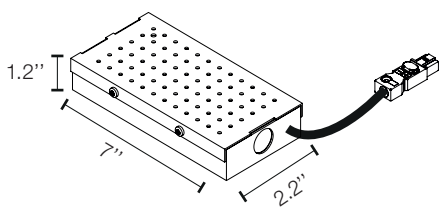

Minimum: 1
Maximum: 3

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

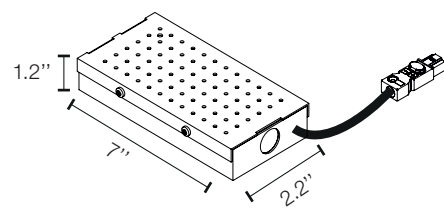

Minimum: 1
Maximum: 3