





Dimensions

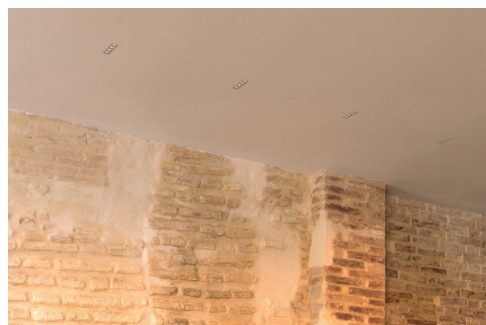

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Fixed Trim 4 Spots

Ceiling Recessed Fixed Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	3.5 W
Initial Lumens	384 lm / 404 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Fixed
Weight	0.35 Lbs
Ingress Protection Rating	IP55

Finishes: ☐ White/White ☐ White/Black ☐ White/Steel ☐ White/Bronze



☐ Black/White

☐ Black/Black


☐ Black/Steel

☐ Black/Bronze




Installation type	Ceiling Recessed
-------------------	------------------

Environment	Indoor
-------------	--------

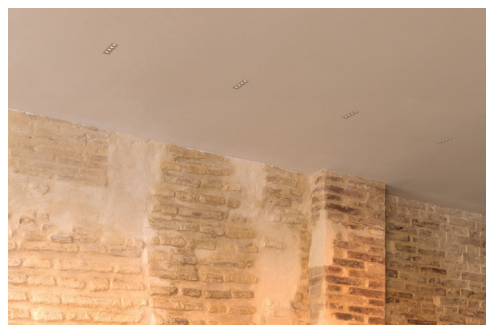

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Fixed Trim 4 Spots

Ceiling Recessed Fixed Downlight

Electrical & Control

Driver Input Voltage	120V - 277V
Control	0-10V, Dali, Triac, Push
Driver	Remote - Order Separately
Current	300mA
Vf	11.6V

Performance

Delivered Lumens	up to 368 lm
Efficacy	up to 105 W

Notes

Integral LED board is not field replaceable.


IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Mini Fixed Trim 4 Spots

Ceiling Recessed Fixed Downlight

How to specify

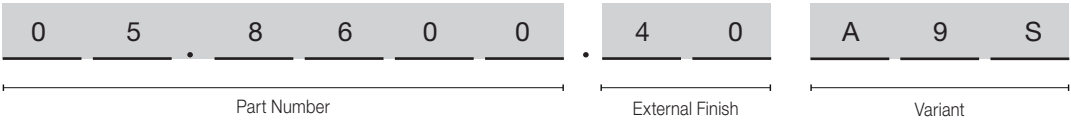

How to Specify							
ex. 03.8600.40.A9S .A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	384	3.5	14°	05.8600	14 Black 40 White	40 White
					05.8601		14 Black
					05.8603		ER Steel
					05.8604		ES Bronze
3000	90	404	3.5	14°	05.8620	14 Black 40 White	40 White
					05.8621		14 Black
					05.8623		ER Steel
					05.8624		ES Bronze
2700	90	384	3.5	26°	05.8605	14 Black 40 White	40 White
					05.8606		14 Black
					05.8608		ER Steel
					05.8609		ES Bronze
3000	90	404	3.5	26°	05.8625	14 Black 40 White	40 White
					05.8626		14 Black
					05.8628		ER Steel
					05.8629		ES Bronze
3000	90	384	3.5	37°	05.8610	14 Black 40 White	40 White
					05.8611		14 Black
					05.8613		ER Steel
					05.8614		ES Bronze
3000	90	404	3.5	37°	05.8630	14 Black 40 White	40 White
					05.8631		14 Black
					05.8633		ER Steel
					05.8634		ES Bronze

Light Shadow Mini Fixed Trim 4 Spots
Ceiling Recessed Fixed Downlight


Photometrics

Table with 3 columns: 2700 K - SPOT, 2700 K - MEDIUM, 2700 K - FLOOD; 3000 K - SPOT, 3000 K - MEDIUM, 3000 K - FLOOD. Each column contains beam angle diagrams and photometric data tables.

Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

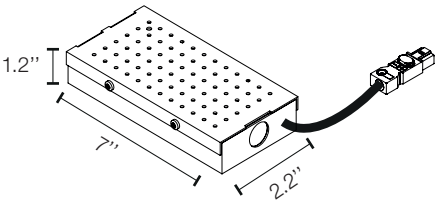

Minimum: 1
Maximum: 2

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

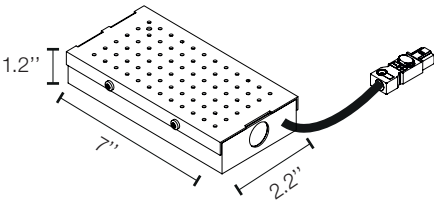

Minimum: 1
Maximum: 2