

Light Shadow Mini Adjustable Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	1.75 W
Initial Lumens	192 lm / 202 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Adjustable
Weight	0.33 Lbs
Ingress Protection Rating	IP55

Finishes:

☐ White/White ☐ White/Black ☐ White/Steel ☐ White/Bronze



☐ Black/White

☐ Black/Black

☐ Black/Steel


☐ Black/Bronze



Installation type Ceiling Recessed

Environment Indoor

Dimensions



Certifications



Photometrics


For current IES files please visit
arch.flosusa.com

Warranty


2 years from date of sale.

Light Shadow Mini Adjustable Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

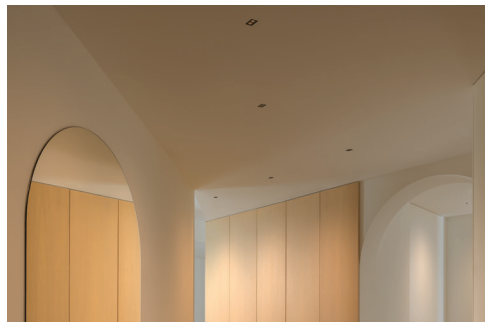

Dimensions



Electrical & Control

Driver Input Voltage	120V - 277V
Control	0-10V, Dali, Triac, Push
Driver	Remote - Order Separately
Current	300mA
Vf	6V

Performance

Delivered Lumens	up to 184 lm.
Efficacy	up to 105 W

Notes

Integral LED board is not field replaceable.

IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Light Shadow Mini Adjustable Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

How to specify

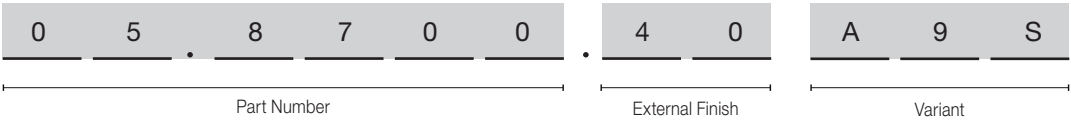


How to Specify							
ex. 03.8700.40.A9S .A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	192	1.75	14°	05.8700	14 Black 40 White	40 White
					05.8701		14 Black
					05.8703		ER Steel
					05.8704		ES Bronze
3000	90	202	1.75	14°	05.8720	14 Black 40 White	40 White
					05.8721		14 Black
					05.8723		ER Steel
					05.8724		ES Bronze
2700	90	192	1.75	26°	05.8705	14 Black 40 White	40 White
					05.8706		14 Black
					05.8708		ER Steel
					05.8709		ES Bronze
3000	90	202	1.75	26°	05.8725	14 Black 40 White	40 White
					05.8726		14 Black
					05.8728		ER Steel
					05.8729		ES Bronze
3000	90	192	1.75	37°	05.8710	14 Black 40 White	40 White
					05.8711		14 Black
					05.8713		ER Steel
					05.8714		ES Bronze
3000	90	202	1.75	37°	05.8730	14 Black 40 White	40 White
					05.8731		14 Black
					05.8733		ER Steel
					05.8734		ES Bronze

Light Shadow Mini Adjustable Trim 2 Spots IC Rated


Ceiling Recessed Adjustable Downlight

Photometrics


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT



3000 K - MEDIUM




3000 K - FLOOD



Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

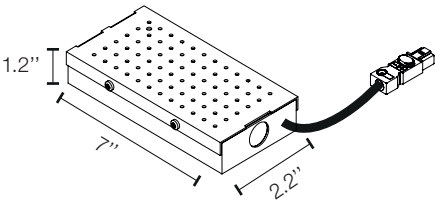

Minimum: 1
Maximum: 3

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

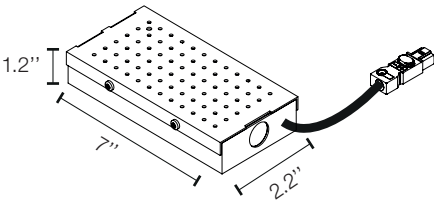

Minimum: 1
Maximum: 3