





Dimensions

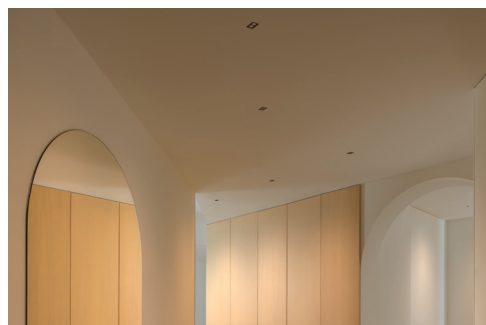

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Adjustable No Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	1.75 W
Initial Lumens	192 lm / 202 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Adjustable
Weight	0.33 Lbs
Ingress Protection Rating	IP55

Finishes: White/White White/Black White/Steel White/Bronze



Black/White


Black/Black

Black/Steel


Black/Bronze



Installation type	Ceiling Recessed
Environment	Indoor

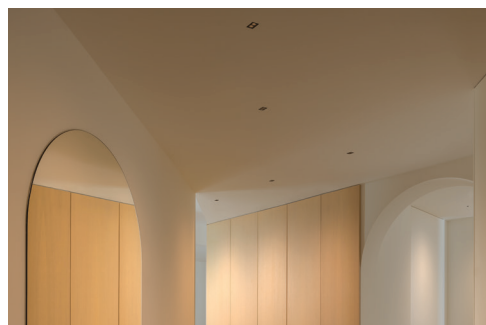

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Mini Adjustable No Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

Electrical & Control

Driver Input Voltage	120V - 277V
Control	0-10V, Dali, Triac, Push
Driver	Remote - Order Separately
Current	300mA
Vf	6V

Performance

Delivered Lumens	up to 184 lm.
Efficacy	up to 105 W

Notes

Integral LED board is not field replaceable.


IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Mini Adjustable No Trim 2 Spots IC Rated

Ceiling Recessed Adjustable Downlight

How to specify

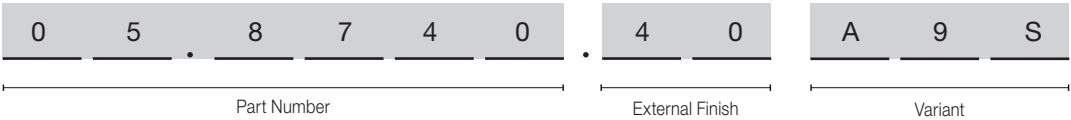


How to Specify							
ex. 03.8740.40.A9S							
.A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	192	1.75	14°	05.8740	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8741		
					05.8743		
					05.8744		
3000	90	202	1.75	14°	05.8760	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8761		
					05.8763		
					05.8764		
2700	90	192	1.75	26°	05.8745	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8746		
					05.8748		
					05.8749		
3000	90	202	1.75	26°	05.8765	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8766		
					05.8768		
					05.8769		
3000	90	192	1.75	37°	05.8750	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8751		
					05.8753		
					05.8754		
3000	90	202	1.75	37°	05.8770	40 White 14 Black 40 White	40 White 14 Black ER Steel ES Bronze
					05.8771		
					05.8773		
					05.8774		

Light Shadow Mini Adjustable No Trim 2 Spots IC Rated


Ceiling Recessed Adjustable Downlight

Photometrics


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT



3000 K - MEDIUM




3000 K - FLOOD



Required Aecessories

Frame No Trim Adjustable 2L


08.1058.00



Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

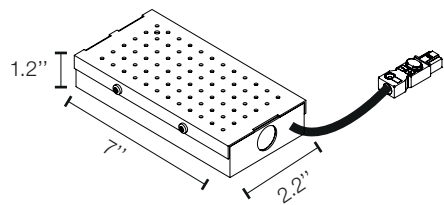

Minimum: 1
Maximum: 3

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

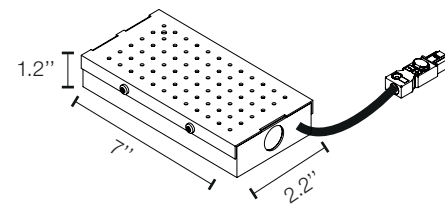

Minimum: 1
Maximum: 3