

Light Shadow Mini Adjustable Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight

Description

A miniaturised downlight that retains the exceptional visual comfort and high performance of the Light Shadow family in a smaller form. Designed for precise light control and optimal light quality, it guarantees a glare-free experience while adapting effortlessly to a range of environments and specific requirements.

Lamp

Lamps Type	Power LED
Wattage	3.5 W
Initial Lumens	384 lm / 404 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle	*14° / 26° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

* Spot, Medium, Flood

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Adjustable
Weight	0.39 Lbs
Ingress Protection Rating	IP55


Finishes:

 White/White

 White/Black

 White/Steel

 White/Bronze



 Black/White

 Black/Black



 Black/Steel

 Black/Bronze




Installation type Ceiling Recessed

Environment Indoor

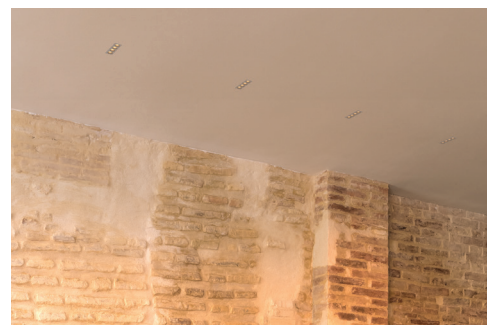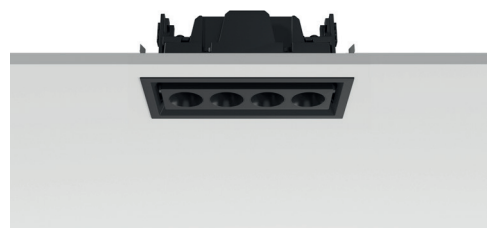

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty


2 years from date of sale.

Light Shadow Mini Adjustable Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight



Dimensions



Electrical & Control

Driver Input Voltage 120V - 277V

Control 0-10V, Dali, Triac, Push

Driver Remote - Order Separately

Current 300mA

Vf 11.6V

Performance

Delivered Lumens up to 368 lm.

Efficacy up to 105 W

Notes

Integral LED board is not field replaceable.

IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Light Shadow Mini Adjustable Trim 4 Spots IC Rated

Ceiling Recessed Fixed Downlight

How to specify

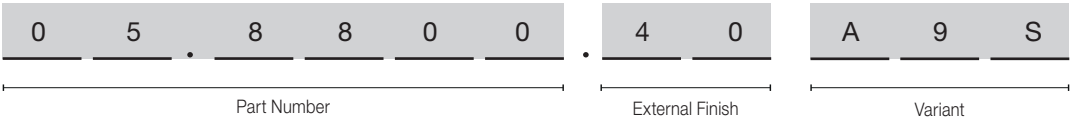


How to Specify							
ex. 03.8800.40.A9S .A9S = IC Rated - Remote Power Supply							
CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	External Finish	Internal Finish
2700	90	384	3.5	14°	05.8800	14 Black 40 White	40 White
					05.8801		14 Black
					05.8803		ER Steel
					05.8804		ES Bronze
3000	90	404	3.5	14°	05.8820	14 Black 40 White	40 White
					05.8821		14 Black
					05.8823		ER Steel
					05.8824		ES Bronze
2700	90	384	3.5	26°	05.8805	14 Black 40 White	40 White
					05.8806		14 Black
					05.8808		ER Steel
					05.8809		ES Bronze
3000	90	404	3.5	26°	05.8825	14 Black 40 White	40 White
					05.8826		14 Black
					05.8828		ER Steel
					05.8829		ES Bronze
3000	90	384	3.5	37°	05.8810	14 Black 40 White	40 White
					05.8811		14 Black
					05.8813		ER Steel
					05.8814		ES Bronze
3000	90	404	3.5	37°	05.8830	14 Black 40 White	40 White
					05.8831		14 Black
					05.8833		ER Steel
					05.8834		ES Bronze

Light Shadow Mini Adjustable Trim 4 Spots IC Rated


Ceiling Recessed Fixed Downlight

Photometrics


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT



3000 K - MEDIUM




3000 K - FLOOD



Driver

Splice Box UL Triac & 0-10V Dimmable
300mA LED driver 10W
Size: 7" x 2.2" x 1.2"


SP10W300MA-VAR-Y1

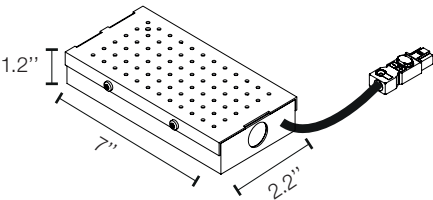

Minimum: 1
Maximum: 2

Splice Box UL DALI & PUSH Dimmable
300mA Multi-Current LED driver 10W
Size: 7" x 2.2" x 1.2"

SP10W300MA-DAL-Y1

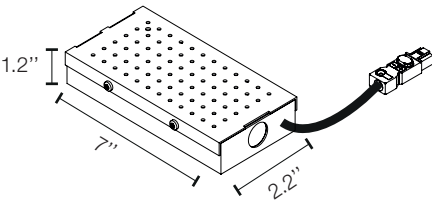

Minimum: 1
Maximum: 2