



Flauta 2

Outdoor surface luminaire designed by Patricia Urquiola

Description

Flauta is a collection of outdoor Wall sconces with double emission, Uplight and Downlight available in different lengths. The characteristic part of this piece is his surface pattern etching two refined variations: Flauta Riga, with vertical lines, and Flauta Spiga, with an elegant and sophisticated angular lines.

The structure is made of aluminum treated with a chemical conversion process for effective resistance to atmospheric agents.

Lamp

Lamps Type	LED
Wattage	12W
Output Nominal	2x555lm, 2x597lm, 2x638lm
Color Temperature	2700K, 3000k, 4000K
Color rendering	CRI80

Optical

Beam Angle	16°
Lighting Type	Wall-Washer
Light Distribution	Symmetric


Physical

Material	Aluminum
Aiming	Fixed
Weight	3.1 Pounds
Ingress Protection Rating	IP65


Finishes

Painted lacquer

01 White	06 Grey	12 Forest Green	18 Deep Brown	30 Black	33 Anthracite
----------	---------	-----------------	---------------	----------	---------------

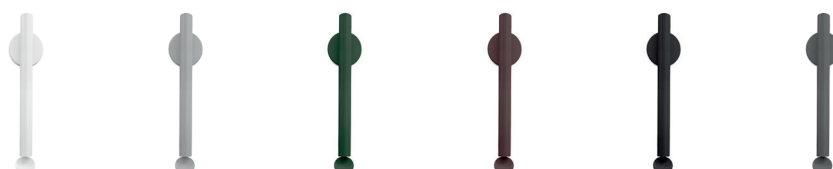

Dimensions

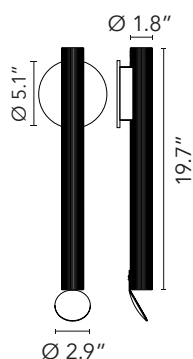

Flauta Riga 2

Certifications



ADA Compliant

Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Installation type	Wall surface
Environment	Outdoor / Wet location



Flauta 2

Outdoor surface luminaire designed by Patricia Urquiola


Electrical & Control

Voltage	120V
Control	Phase-Cut
Driver	Integral


Performance

Maximum delivered output	347lm, 372lm, 398lm
Efficacy	33.2 lm/W

Notes

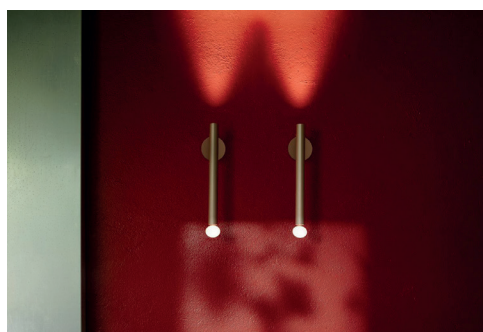

Dimensions

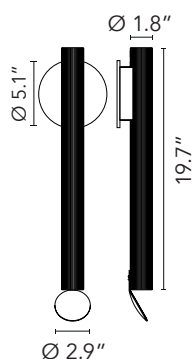

Flauta Riga 2

Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment.

Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

2200K available on request.

Certifications



ADA Compliant

Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.


Flauta 2

Outdoor surface luminaire designed by Patricia Urquiola


How to specify



Flauta Riga 2

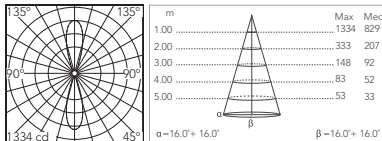Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics
F019A22DU01	 White	2700	12W	2 x 255	347	16°	80	
F019A22DU06	 Grey							
F019A22DU33	 Anthracite							
F019A22DU30	 Black							
F019A22DU18	 Deep Brown							
F019A22DU12	 Forest Green							
F019A32DU01	 White	3000	12W	2 x 597	372			
F019A32DU06	 Grey							
F019A32DU33	 Anthracite							
F019A32DU30	 Black							
F019A32DU18	 Deep Brown							
F019A32DU12	 Forest Green							
F019A42DU01	 White	4000	12W	2 x 638	398			
F019A42DU06	 Grey							
F019A42DU33	 Anthracite							
F019A42DU30	 Black							
F019A42DU18	 Deep Brown							
F019A42DU12	 Forest Green							

Riga Pattern



Riga: Series of skillfully calibrated etchings on the surface trace a sign characterized by rigor and classical references.

Up or low



The deflector accessory, painted to match the lamp body, can be installed on either the upper or lower head. Held in place by magnets and safety screws, it creates a decorative effect with reflected light.

Watertight



The optics housing is guaranteed to be watertight. The transparent glass is sealed with a line of silicone to the light fitting body to prevent water deposits.