



Flauta 3

Outdoor surface luminaire designed by Patricia Urquiola

Description

Flauta is a collection of outdoor Wall sconces with double emission, Uplight and Downlight available in different lengths. The characteristic part of this piece is his surface pattern etching two refined variations: Flauta Riga, with vertical lines, and Flauta Spiga, with an elegant and sophisticated angular lines.


The structure is made of aluminum treated with a chemical conversion process for effective resistance to atmospheric agents.

Lamp

Lamps Type	LED
Wattage	12W
Output Nominal	2x555lm, 2x597lm, 2x638lm
Color Temperature	2700K, 3000k, 4000K
Color rendering	CRI80



Dimensions

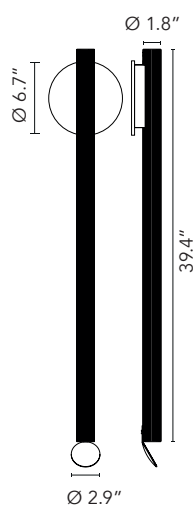

Flauta Riga 3


Optical

Beam Angle	16°
Lighting Type	Wall-Washer
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Fixed
Weight	5.7 Pounds
Ingress Protection Rating	IP65

Finishes Painted lacquer

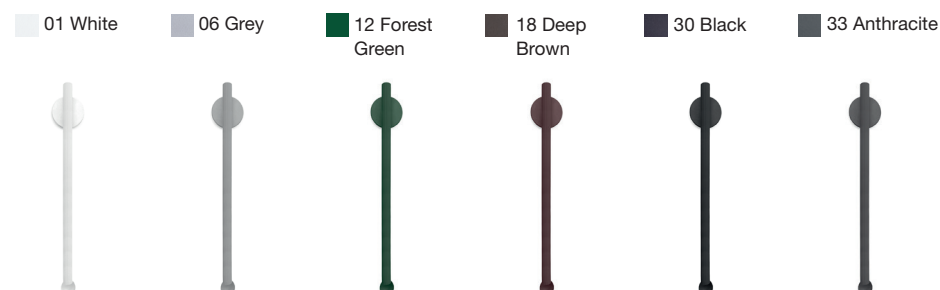

Certifications



ADA Compliant

Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS, USA
36th East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

Installation type	Wall surface
Environment	Outdoor / Wet location



Flauta 3

Outdoor surface luminaire designed by Patricia Urquiola

Electrical & Control


Voltage	120V
Control	Phase-Cut
Driver	Integral

Performance

Maximum delivered output	347lm, 372lm, 398lm
Efficacy	33.2 lm/W

Notes

Dimensions

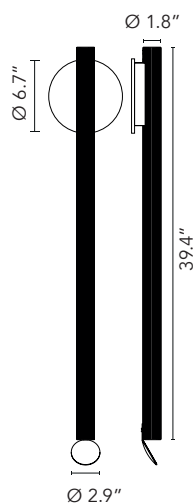

Flauta Riga 3

Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment.

Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

2200K available on request.

Certifications



ADA Compliant

Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS, USA
36th East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011


For more information contact your representative or go to professional.flos.com/en-US/us/
©2026 Specifications and dimensions subject to change without notice. Issued 04.02.2026




Flauta 3

Outdoor surface luminaire designed by Patricia Urquiola


How to specify



Flauta Riga 3

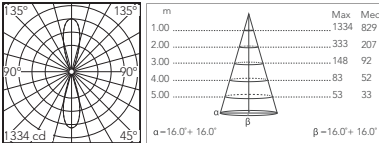Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics
F019A23DU01	 White	2700	12W	2 x 255	347	16°	80	
F019A23DU06	 Grey							
F019A23DU33	 Anthracite							
F019A23DU30	 Black							
F019A23DU18	 Deep Brown							
F019A23DU12	 Forest Green							
F019A33DU01	 White	3000	12W	2 x 597	372			
F019A33DU06	 Grey							
F019A33DU33	 Anthracite							
F019A33DU30	 Black							
F019A33DU18	 Deep Brown							
F019A33DU12	 Forest Green							
F019A43DU01	 White	4000	12W	2 x 638	398			
F019A43DU06	 Grey							
F019A43DU33	 Anthracite							
F019A43DU30	 Black							
F019A43DU18	 Deep Brown							
F019A43DU12	 Forest Green							

Riga Pattern



Riga: Series of skillfully calibrated etchings on the surface trace a sign characterized by rigor and classical references.

Up or low



The deflector accessory, painted to match the lamp body, can be installed on either the upper or lower head. Held in place by magnets and safety screws, it creates a decorative effect with reflected light.

Watertight



The optics housing is guaranteed to be watertight. The transparent glass is sealed with a line of silicone to the light fitting body to prevent water deposits.