



UT D57 Spot Track

Track Mounted Directional Accent


Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.


A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.



Dimensions



Dali Version



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED ARRAY
Wattage	23.5W
Output Nominal	2500 lm / 2000 lm / 2150 lm
Color Temperature	3000K / 3000K / 4000K
Color rendering	CRI 80 /CRI 90 / CRI 90

Optical

Beam Angle	10°/ 21°/ 42°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	1.26 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°

Finishes

Painted lacquer

☐ 30 White

☐ 14 Black



Installation type	3C-Track
Environment	Indoor dry location



UT D57 Spot Track

Track Mounted Directional Accent

Electrical & Control

Driver location	Integral
Driver Input Voltage	120V-277V
Control	ELV, non Dimmable

Performance

Maximum delivered output	From 1471lm up to 2007lm
Efficacy	111,5lm/W

Notes

Integral LED is not field replaceable.

Just 1 accessory can be install at the time. For filter options contact Flos.


Consult factory for additional color temperatures.

Track Required. See Spec-sheet for Global 3c-track.


Contact FLOS sales agent for configuration of layout and specification information



Dimensions



Dali Version



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

UT D57 Spot Track

Track Mounted Directional Accent

How to specify

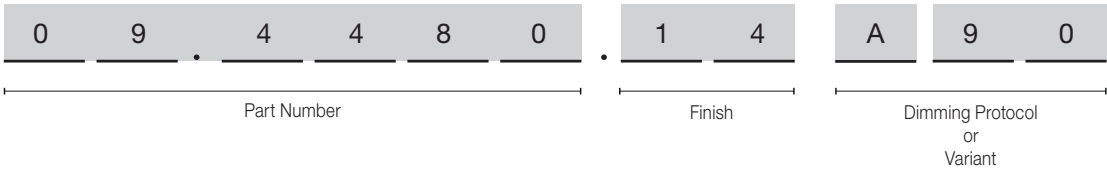

Non Dimmable

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	23.5 W	2500lm	10°	09.4480	☐ 30 = White ☒ 14 = Black	A90= Integral non-dimming driver, 120-277V A9V= Integral ELV dimming driver, 120V
				21°	09.4482		
				42°	09.4484		
3000K	90	23.5 W	2000lm	10°	09.4486	☐ 30 = White ☒ 14 = Black	
				21°	09.4487		
				42°	09.4488		
4000K	90	23.5 W	2150lm	10°	09.4481	☐ 30 = White ☒ 14 = Black	
				21°	09.4483		
				42°	09.4485		

UT D57 Spot Track


Track Mounted Directional Accent

On board dimmer included

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Variant
3000K	80	23.5 W	2500lm	10°	09.4440	30 = White 14 = Black	A9V= Integral ELV dimming driver, 120V
				21°	09.4441		
				42°	09.4442		
3000K	90	23.5 W	2000lm	10°	09.4443	30 = White 14 = Black	A9V= Integral ELV dimming driver, 120V
				21°	09.4444		
				42°	09.4445		
4000K	90	23.5 W	2150lm	10°	09.4450	30 = White 14 = Black	A9V= Integral ELV dimming driver, 120V
				21°	09.4451		
				42°	09.4452		


Photometrics

3000K CRI 90




Beam Angle: 10°			
h(m)	E(lx)	D(m)	
1	11643	0.18	
2	2911	0.36	
3	1294	0.54	
4	728	0.72	
5	466	0.90	

Luminous flux luminaire
997 lm



Beam Angle: 21°			
h(m)	E(lx)	D(m)	
1	5178	0.37	
2	1294	0.73	
3	575	1.10	
4	324	1.47	
5	207	1.83	

Luminous flux luminaire
941 lm




Beam Angle: 42°			
h(m)	E(lx)	D(m)	
1	2623	0.76	
2	656	1.52	
3	291	2.28	
4	164	3.05	
5	105	3.81	

Luminous flux luminaire
1108 lm

UT D57 Spot Track

Track Mounted Directional Accent

Optional Accessories *

Cross baffle	Elliptical lens	Flood lens
08.8429.00	08.8431.00	08.8432.00
		
Honeycomb anti-glare louvre *	Snoot shielding cone	
08.8428.00	08.0526.00	
		

* Fixture accomodates exclusively 1 accessory, for Filter options contact Flos