



UT D57 Spot Track

Track Mounted Directional Accent

Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments. A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.



Lamp

Lamp Type	LED ARRAY
Wattage	23,5W
Output Nominal	2500lm / 2000lm / 2150lm
Color Temperature	3000K / 3000K / 4000K
Color rendering	CRI 80 / CRI 90 / CRI 90

Optical

Beam Angle	10°/ 21°/ 42°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	1.26 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°


Finishes

Painted lacquer


☐ 30 White ☐ 14 Black ☐ 30.78 All White



Dimensions



Dali Version



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Installation type	Track
Environment	Indoor dry location



UT D57 Spot Track

Track Mounted Directional Accent

Electrical & Control

Driver location	Integral non-dimming driver
Driver Input Voltage	120V-277V
Control	Non Dimmable


Performance

Maximum delivered output	From 1471lm up to 2145lm
Efficacy	91,3lm/W


Notes



Dimensions



Dali Version



Integral LED is not field replaceable.

Fixture is constant Current Low Voltage LED, Class 2.

Just 1 accessory can be install at the time. For filter options contact Flos.

3500K available, but not cataloged. Consult factory for additional color temperatures.

.30 versions come with the track adapter, the arm and the rear of the head in black. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

Track Required. See Spec-sheet for Global 3c-track.

Contact FLOS sales agent for configuration of layout and specification information

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

UT D57 Spot Track

Track Mounted Directional Accent

How to specify

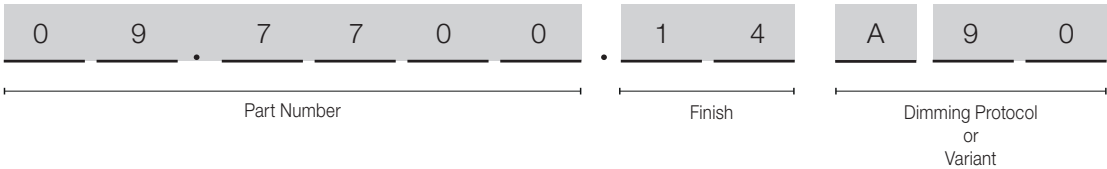


Non Dimmable

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	23.5 W	2500lm	10°	09.7700	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				21°	09.7702		
				42°	09.7704		
3000K	90	23.5 W	2000lm	10°	09.7706	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				21°	09.7707		
				42°	09.7708		
4000K	90	23.5 W	2150lm	10°	09.7701	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				21°	09.7703		
				42°	09.7705		

Photometrics


3000K CRI 90

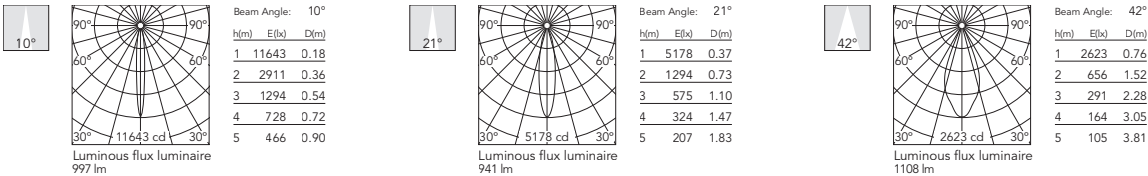

UT D57 Spot Track

Track Mounted Directional Accent

Optional Accessories *

Cross baffle	Elliptical lens	Flood lens
08.8429.00	08.8431.00	08.8432.00
		
Honeycomb anti-glare louvre *	Snoot shielding cone	
08.8428.00	08.0526.00	
		

* Fixture accomodates exclusively 1 accessory, for Filter options contact Flos