



UT D86 Spot Track

Track Mounted Directional Accent

Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.


A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.




Lamp

Lamp Type	LED ARRAY
Wattage	33 W
Output Nominal	3770lm / 3116lm / 3246lm
Color Temperature	3000K / 3000K / 4000K
Color rendering	CRI 80 / CRI 90 / CRI 90

Dimensions



Dali Version



Optical

Beam Angle	12° / 24° / 37°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	1.65 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°

Finishes

Painted lacquer

☐ 30 White

☒ 14 Black

☐ 30.78 All White



Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Installation type	Track
Environment	Indoor dry location



UT D86 Spot Track

Track Mounted Directional Accent

Electrical & Control

Driver location	Integral non-dimming driver
Driver Input Voltage	120V-277V
Control	Non Dimmable

Performance

Maximum delivered output	From 1990lm to 2646lm
Efficacy	80,2lm/W

Notes

Integral LED is not field replaceable.

Fixture is constant Current Low Voltage LED, Class 2.

Just 1 accessory can be install at the time. For filter options contact Flos.

3500K available, but not cataloged. Consult factory for additional color temperatures.


.30 versions come with the track adapter, the arm and the rear of the head in black. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

Track Required. See Spec-sheet for Global 3c-track.


Contact FLOS sales agent for configuration of layout and specification information



Dimensions



Dali Version



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

UT D86 Spot Track

Track Mounted Directional Accent

How to specify

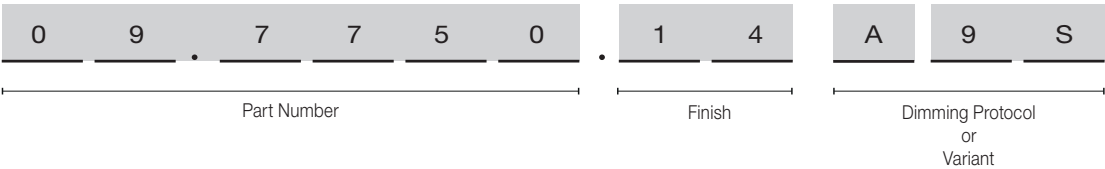


Non Dimmable

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	33 W	3770lm	12°	09.7750	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				24°	09.7752		
				37°	09.7754		
3000K	90	33 W	3116lm	12°	09.7756	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				24°	09.7757		
				37°	09.7758		
4000K	90	33 W	3246lm	12°	09.7751	☐ 30 = White ☒ 14 = Black ☐ 30A78 = All White	A90= Integral non-dimming driver, 120-277V
				24°	09.7753		
				37°	09.7755		

Photometrics

3000K CRI 90

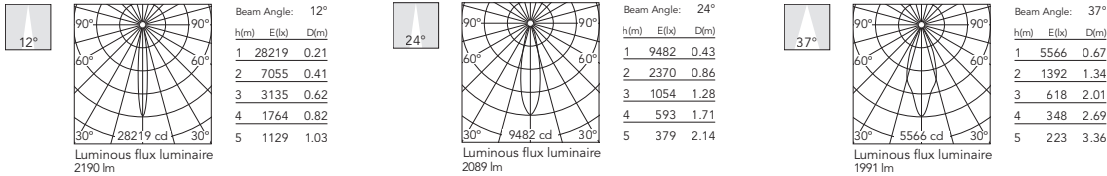

UT D86 Spot Track

Track Mounted Directional Accent

Optional Accessories *

Holding Ring	Cross baffle	Flood lens (to use with the holding ring)
08.8410.00	08.8411.00	08.8175.68
		
Honeycomb anti-glare louvre (to use with the holding ring)	Elliptical lens (to use with the holding ring)	
08.8495.14	08.8163.68	
		

* Fixture accomodates exclusively 1 accessory, for Filter options contact Flos