



UT Spot Track Wall-Washer D86

Track Mounted Directional Accent


Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.

A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.



Dimensions

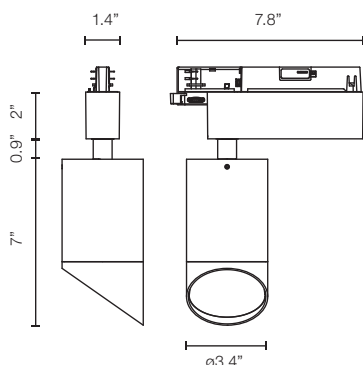

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED ARRAY High Performances
Wattage	33W
Output Nominal	3960lm / 3250lm / 3500lm
Color Temperature	3000K / 3000K / 4000K
Color rendering	CRI 80 / CRI 90 / CRI 90

Optical

Beam Angle	50°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	3.4 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°

Finishes

☐ 30 White

Painted lacquer

☒ 14 Black



Installation type	Track
Environment	Indoor dry location



UT Spot Track Wall-Washer D86

Track Mounted Directional Accent

Electrical & Control


Driver location	Integral non-dimming driver
Driver Input Voltage	120V-277V
Control	ELV, non Dimmable

Performance

Maximum delivered output	From 21160lm to 2560lm
Efficacy	77,6lm/W



Dimensions

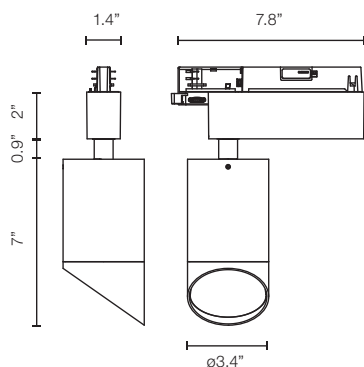

Notes

Integral LED is not field replaceable.

Fixture is constant Current Low Voltage LED, Class 2.

Just 1 accessory can be install at the time. For filter options contact Flos.

3500K available, but not cataloged. Consult factory for additional color temperatures.

Track Required. See Spec-sheet for Global 3c-track.

Contact FLOS sales agent for configuration of layout and specification information

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

UT Spot Track Wall-Washer D86

Track Mounted Directional Accent

How to specify

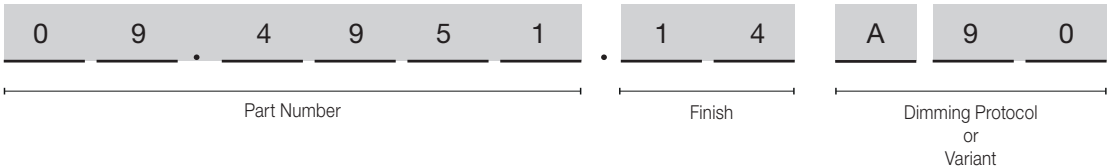

Non Dimmable

CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	33W	3960lm	50°	09.4951	☐ 30 = White ☒ 14 = Black	A90= Integral non-dimming driver, 120-277V
3000K	90	33W	3250lm	50°	09.4954	☐ 30 = White ☒ 14 = Black	A90= Integral non-dimming driver, 120-277V
4000K	90	33W	3500lm	50°	09.4957	☐ 30 = White ☒ 14 = Black	A90= Integral non-dimming driver, 120-277V

UT Spot Track Wall-Washer D86


Track Mounted Directional Accent

On board dimmer included


CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	33W	3960lm	50°	09.4950	30 = White 14 = Black	A9S = Integral power Supply, On board dimmer included
3000K	90	33W	3250lm	50°	09.4953	30 = White 14 = Black	A9S = Integral power Supply, On board dimmer included
4000K	90	33W	3500lm	50°	09.4956	30 = White 14 = Black	A9S = Integral power Supply, On board dimmer included

Photometrics

3000K - CRI 80



3000K - CRI 90



4000K - CRI 90

