



UT Spot Track Wall-Washer D86

Track Mounted Directional Accent


Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.


A light fixture for indoor use to be mounted on ceilings, available in LED technology light sources and in ELV&FF or 1-10V dimming versions.



Dimensions



Dali Version



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED ARRAY High Performances
Wattage	33W
Output Nominal	3960lm / 3250lm / 3500lm
Color Temperature	3000K / 3000K / 4000K
Color rendering	CRI 80 / CRI 90 / CRI 90

Optical

Beam Angle	50°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	3.4 Lbs
Ingress Protection Rating	IP20
Maximum tilt Angle 90°	90°
Rotation 360°	360°

Finishes

Painted lacquer

☐ 30 White

☒ 14 Black

☐ 30.78 All White



Installation type	Track
Environment	Indoor dry location



UT Spot Track Wall-Washer D86

Track Mounted Directional Accent

Electrical & Control


Driver location	Integral non-dimming driver
Driver Input Voltage	120V-277V
Control	Non Dimmable

Performance


Maximum delivered output	From 21160lm to 2560lm
Efficacy	77,6lm/W



Dimensions



Dali Version



Notes

Integral LED is not field replaceable.

Fixture is constant Current Low Voltage LED, Class 2.

Just 1 accessory can be install at the time. For filter options contact Flos.

3500K available, but not cataloged. Consult factory for additional color temperatures.

.30 versions come with the track adapter, the arm and the rear of the head in black. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

Track Required. See Spec-sheet for Global 3c-track.

Contact FLOS sales agent for configuration of layout and specification information

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

UT Spot Track Wall-Washer D86

Track Mounted Directional Accent

How to specify

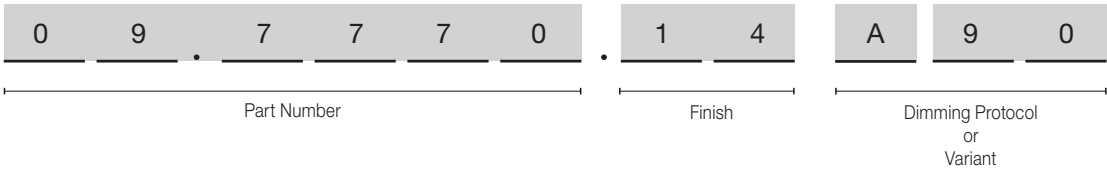


Non Dimmable


CCT	CRI	Wattage	Initial Lumens	Beam Angle	Part Number	Finish	Dimming Protocol
3000K	80	35.5W	3960lm	50°	09.7770	☐ 30 = White ☒ 14 = Black ☐ 30A78 = AllWhite	A90= Integral non-dimming driver, 120-277V
3000K	90	35.5W	3250lm	50°	09.7771	☐ 30 = White ☒ 14 = Black ☐ 30A78 = AllWhite	A90= Integral non-dimming driver, 120-277V
4000K	90	35.5W	3500lm	50°	09.7772	☐ 30 = White ☒ 14 = Black ☐ 30A78 = AllWhite	A90= Integral non-dimming driver, 120-277V

Photometrics

3000K - CRI 80



3000K - CRI 90



4000K - CRI 90

