

Camouflage Ø 140 by Piero Lissoni

Outdoor use for wall installation.



Description

Collection of products for outdoor use, for wall installation with LED light source. Dissipating aluminum body with diffuser in transparent polycarbonate. The Crema d'Orcia and Basaltina stone finishes are made by fastening high-strength, high-resistance adhesive to a stone plate created by means of mechanical machining from a solid block.

Lamp

Lamps Type	LED
Wattage	8W
Initial Lumens	786 lm, 913 lm, 960 lm
Color Temperature	2700K, 3000K, 4000K
Color rendering	CRI80

Optical

Beam Angle	157°
Lighting Type	Indirect
Light Distribution	Diffuse

Physical

Material	Aluminium / Stone
Aiming	Fixed
Weight	Pounds
Ingress Protection Rating	IP65

Finishes


Painted lacquer / Real Stone Finish



Installation type	Wall
Environment	Outdoor/ Wet location



Dimensions



*Concrete, crema d'orcia, basaltina H = 1.38" [35mm].

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Camouflage Ø 140 by Piero Lissoni

Outdoor use for wall installation.



Electrical & Control

Input Fixture Voltage	24V
Control	Forward + Reverse Phase, 0-10V Dimming
Driver	Remote
Input Driver Voltage	120 - 277V
Output Driver Voltage	24V

Performance

Maximum delivered output	579
Efficacy	72.4 lm/W

Notes

Recommended connections for in-ground installations with a 2-way terminal block 4 pole IP68 H₂O Stop. Not supplied by FLOS, to be ordered separately.

The concrete stone finishing is made by fastening a poured cement plate reinforced with fiberglass using a single component high strength, high-resistance adhesive.

The Primer version is painted after installation with normal water-based colors (tempera, stucco, water-based paints) to ensure maximum uniformity with the architecture.

The aluminum versions are finished with a high-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard.

The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents.

The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.


For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

Dimensions



*Concrete, crema d'orcia, basaltina H = 1.38" [35mm].

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.

Camouflage Ø 140 by Piero Lissoni

Outdoor use for wall installation.

How to specify

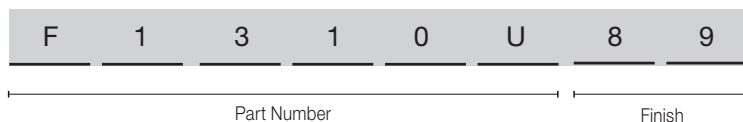

Part Number	Finish	CCT	Initial Lumens	Delivered Lumens	CRI	Photometrics
F1310U89	Concrete	2700	786	474	80	
F1310U90	Crema d'Orcia Stone					
F1310U87	Basaltina Stone					
F1310U00	Primer					
F1310U01	White					
F1310U06	Grey					
F1310U33	Anthracite					
F1310U30	Black					
F1310U18	Deep Brown					
F1310U12	Forest Green					
F1311U89	Concrete	3000	913	551	80	
F1311U90	Crema d'Orcia Stone					
F1311U87	Basaltina Stone					
F1311U00	Primer					
F1311U01	White					
F1311U06	Grey					
F1311U33	Anthracite					
F1311U30	Black					
F1311U18	Deep Brown					
F1311U12	Forest Green					
F1312U89	Concrete	4000	960	579	80	
F1312U90	Crema d'Orcia Stone					
F1312U87	Basaltina Stone					
F1312U00	Primer					
F1312U01	White					
F1312U06	Grey					
F1312U33	Anthracite					
F1312U30	Black					
F1312U18	Deep Brown					
F1312U12	Forest Green					

Camouflage Ø 140 by Piero Lissoni

Outdoor use for wall installation.

Drivers

LED Driver, 24VDC, 96W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 60W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 30W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED
LEDSB96W24V-VAR-Y1	LEDSB60W24V-VAR-Y1	LEDSB30W24V-VAR-Y1
