



Zero Track

High-tech LED lighting system for interior architecture


Description

This new 24V system for surface mounted installation is characterized by its diminutive dimensions, providing a minimalist aesthetic which is perfect for many architectural spaces. The extruded aluminum track is available up to 2 meters long, and available in white, black, deep brown, bronze and chrome finishes.


Zero Track is especially useful for residential applications, and concrete ceilings where recessed lighting cannot be installed. Easy to specify, easy to install and with a large variety of elegant spots, pendants, and area light fixtures designed by Jorge Herrera and Piero Lissoni.



Surface Installation

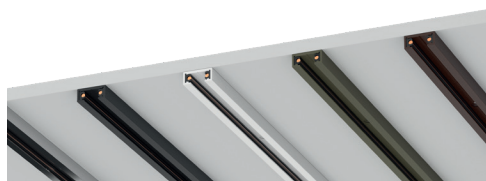

Light Modules

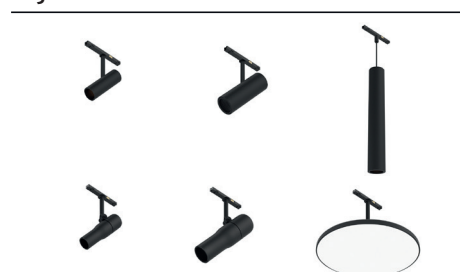

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

| | |
|-------------------|------------------|
| System Lamp Type | LED |
| Color Temperature | 2700K, 3000K |
| Color Rendering | CRI90 |
| Application | General Lighting |

Physical

| | |
|---------------------------|---|
| Material | Aluminum |
| Ingress Protection Rating | IP20 |
| Finishes | <div> <div>40 = White</div> <div>14 = Black</div> <div>06 = Chrome</div> <div>CZ = Bronze</div> <div>18 = Deep brown</div> </div> |
| Installation type | Surface |
| Environment | Indoor |
| Field cuttable | Yes |

Electrical & Control

| | |
|------------------------|--------------|
| Driver location | Remote |
| Driver Input Voltage | 120V-277V |
| Driver Output Voltage | 24V |
| Maximum Driver Wattage | 96W |
| Maximum Current | 4A |
| Control | Non-Dimmable |



Zero Track

High-tech LED lighting system for interior architecture

Notes

Wattage per linear foot is dependent upon quantity and type of light modules used.

Contractor to supply wire from driver to luminaire. Drivers should be installed in a suitable electrical enclosure (by others), and an accessible location.

The surface mounted track is directly screwed to any surface. FLOS provides the mounting hardware.

2 options in term of power supply:


Remote power supply

Surface mounted canopy directly connected to the track. Includes a Jbox cover plate. Track and Surface mounted canopy need to be completely aligned.


The maximum length that can be fed with a single 96W driver is 19'-6", however voltage drop may limit actual lengths to shorter runs. Consult factory for specific application assistance.

3500K and other CCTs are available but not cataloged. Consult factory.

Surface Installation

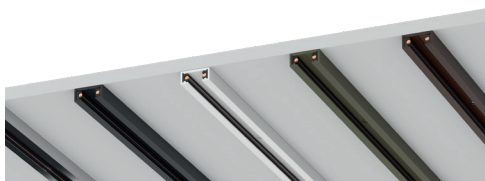

Light Modules

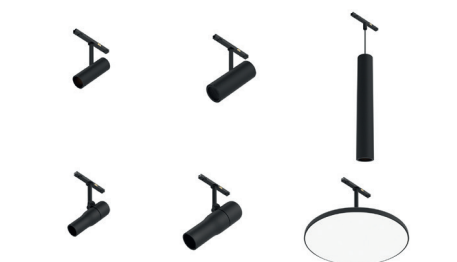

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

How to Specify

A. Select and position corners

1. 90deg Corner - Connect sections on flat surfaces
2. Inner Corner - Connect sections wall/wall, wall/ceiling)

B. Fill lengths between corners with Linear Housings

Available section lengths are 3.3', and 6.7'. Profile can be easily cut on site to exact length and joined together with other track sections.

C. Drivers

Quantity of drivers determined by total wattage or light elements in section (total maximum possible per linear foot is 29W).

Maximum driver distance is 15'. Locate drivers nearby.

D. Select Spot heads

Individual Spots are Find Me zero, Find Me 1, Find Me 2, Find Me 1 Suspension, Atom 90, Atom 120 and Atom 200.

Zero Track

High-tech LED lighting system for interior architecture


Profiles

39.4" [1 m] Profile

Indoor Track for surface mounted installations (ceiling or wall). To be fixed with specific screw plugs that come with the track. All accessories need to be order separately.

Part Number:

- 06.2500.40
- 06.2500.06
- 06.2500.14
- 06.2500.CZ
- 06.2500.18

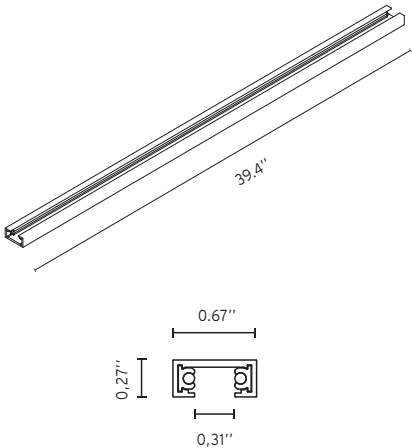


78.7" [2 m] Profile


Indoor Track for surface mounted installations (ceiling or wall). To be fixed with specific screw plugs that come with the track. All accessories need to be order separately.

Part Number:

- 06.2501.40
- 06.2501.06
- 06.2501.14
- 06.2501.CZ
- 06.2501.18

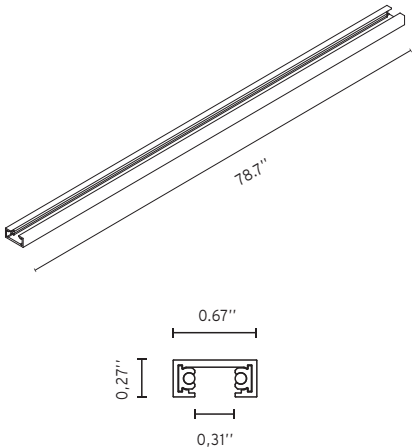

How to specify

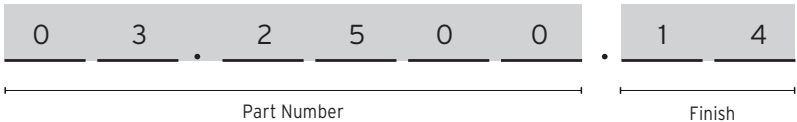

* * specify power supply separately

Zero Track

High-tech LED lighting system for interior architecture


Connectors

Feed unit for remote power supply unit

Power cable inserting is possible both from the top and the side.

Part Number:

- 06.2540.40
- 06.2540.14
- 06.2540.CZ
- 06.2540.18

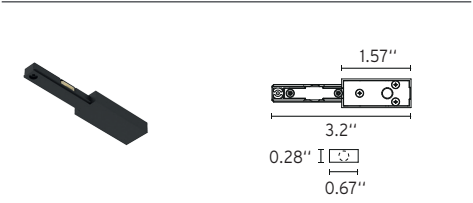


Feed intermediate connector.

Upper feeding cable entry.

Part Number:


- 06.2541.40
- 06.2541.14
- 06.2541.CZ
- 06.2541.18

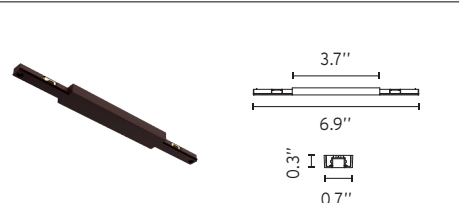

Intermediate connector

Part Number:

- 06.2506.40
- 06.2506.14

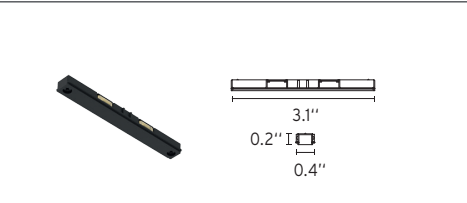


Accessories

End Cap Kit

Part Number:

- 06.2509.40
- 06.2509.14
- 06.2509.CZ
- 06.2509.18

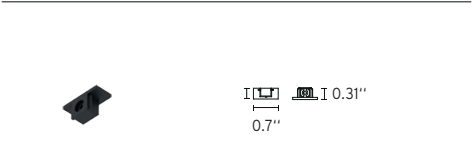


Stopper

For fixing luminaires in vertical track installations.

Part Number:

- 08.0630.40
- 08.0630.14

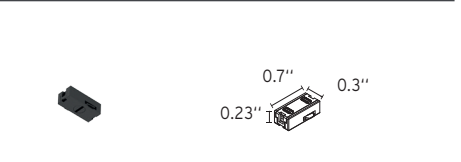

Zero Track

High-tech LED lighting system for interior architecture


Corners

Flat Corner 90°

Can be powered. It has a rear space for the supply connection.

Part Number:

- ☐ 06.2542.40
- ☒ 06.2542.14
- ☒ 06.2542.CZ
- ☒ 06.2542.18

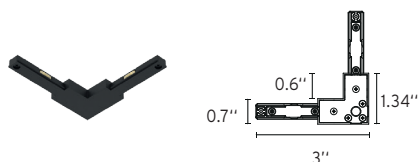


Ceiling/wall - wall/wall inner corner

Can be powered. It has two spaces for the supply connection located on each side at the rear.

Part Number:

- ☐ 06.2543.40
- ☒ 06.2543.14
- ☒ 06.2543.CZ
- ☒ 06.2543.18

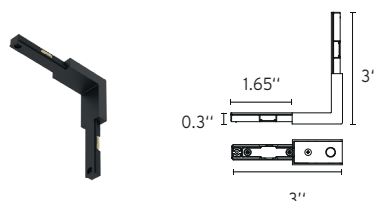

Interior ceiling/ceiling-wall/wall curve.

Can be powered via connections on the back.

Part Number:

- ☐ 06.2544.40
- ☒ 06.2544.14
- ☒ 06.2544.CZ
- ☒ 06.2544.18




T-shaped connector

Can be powered via connections on the back.

Part Number:

- ☐ 06.2545.40
- ☒ 06.2545.14
- ☒ 06.2545.CZ
- ☒ 06.2545.18

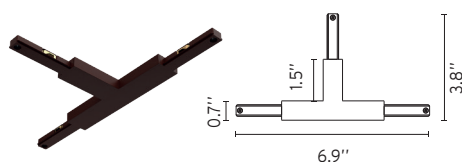


Cross-shaped connector

Can be powered via connections on the back.

Part Number:

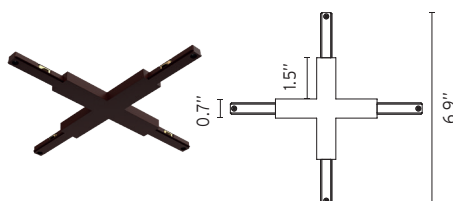



- ☐ 06.2546.40
- ☒ 06.2546.14
- ☒ 06.2546.CZ
- ☒ 06.2546.18



Zero Track

High-tech LED lighting system for interior architecture

Required Drivers

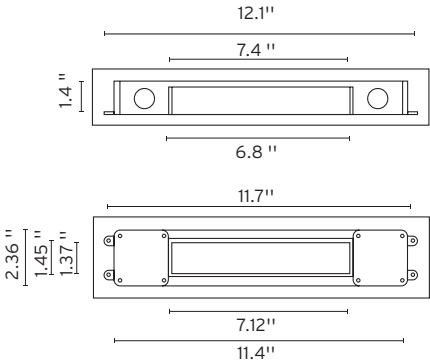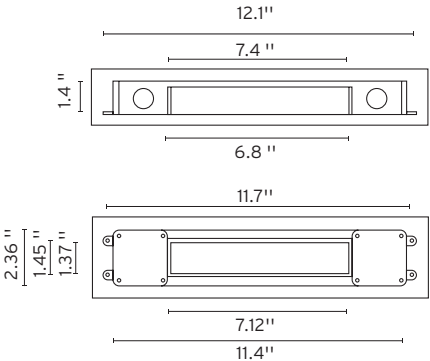
| | | |
|---|---|--|
| LED Driver, 24VDC, 96W, Non-Dimming, 120-277V | LED Driver, 24VDC, 60W, Non-Dimming, 120-277V | |
| Part Number: LEDSB96W24V-NDM-DO1 | Part Number: LEDSB60W24V-NDM-DO1 | |
|  |  | |
|  |  | |

Zero Track

High-tech LED lighting system for interior architecture

Find Me Zero

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. The maximum number of luminaries that can be feeded with the same power supply is 13. Honeycomb and cross baffle comes standard with the fixture. IP20

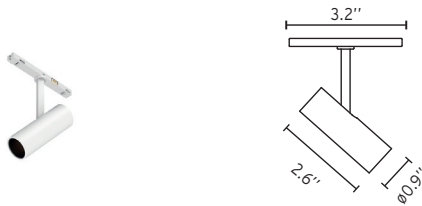

| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric | | | | | | | | | | | | | | | | | | |
|-------|-------|----------------|------------------|-------|-------------|-------------|---|---|------|-------|------|---|------|------|---|-----|------|---|-----|------|---|----|------|---|----|------|
| 2700 | 90 | 300 | 169 | 3.5W | 15° | 09.3801 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>1303 cd</div><div>30°</div><div>60°</div><div>90°</div></div><div>Luminous flux luminaire 169 lm</div></div> <div><div>Beam Angle: 15°</div><table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>1303</td><td>0.26</td></tr><tr><td>2</td><td>326</td><td>0.52</td></tr><tr><td>3</td><td>145</td><td>0.77</td></tr><tr><td>4</td><td>81</td><td>1.03</td></tr><tr><td>5</td><td>52</td><td>1.29</td></tr></table></div> | h(m) | E(lx) | D(m) | 1 | 1303 | 0.26 | 2 | 326 | 0.52 | 3 | 145 | 0.77 | 4 | 81 | 1.03 | 5 | 52 | 1.29 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1303 | 0.26 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 326 | 0.52 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 145 | 0.77 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 81 | 1.03 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 52 | 1.29 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 325 | 183 | 3.5W | 15° | 09.3800 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>1412 cd</div><div>30°</div><div>60°</div><div>90°</div></div><div>Luminous flux luminaire 183 lm</div></div> <div><div>Beam Angle: 15°</div><table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>1412</td><td>0.26</td></tr><tr><td>2</td><td>353</td><td>0.52</td></tr><tr><td>3</td><td>157</td><td>0.77</td></tr><tr><td>4</td><td>88</td><td>1.03</td></tr><tr><td>5</td><td>56</td><td>1.29</td></tr></table></div> | h(m) | E(lx) | D(m) | 1 | 1412 | 0.26 | 2 | 353 | 0.52 | 3 | 157 | 0.77 | 4 | 88 | 1.03 | 5 | 56 | 1.29 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1412 | 0.26 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 353 | 0.52 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 157 | 0.77 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 88 | 1.03 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 56 | 1.29 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2700 | 90 | 300 | 163 | 3.5W | 20° | 09.3803 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>1059 cd</div><div>30°</div><div>60°</div><div>90°</div></div><div>Luminous flux luminaire 163 lm</div></div> <div><div>Beam Angle: 20°</div><table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>1059</td><td>0.36</td></tr><tr><td>2</td><td>265</td><td>0.72</td></tr><tr><td>3</td><td>118</td><td>1.08</td></tr><tr><td>4</td><td>66</td><td>1.44</td></tr><tr><td>5</td><td>42</td><td>1.80</td></tr></table></div> | h(m) | E(lx) | D(m) | 1 | 1059 | 0.36 | 2 | 265 | 0.72 | 3 | 118 | 1.08 | 4 | 66 | 1.44 | 5 | 42 | 1.80 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1059 | 0.36 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 265 | 0.72 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 118 | 1.08 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 66 | 1.44 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 42 | 1.80 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 325 | 177 | 3.5W | 20° | 09.3802 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>1151 cd</div><div>30°</div><div>60°</div><div>90°</div></div><div>Luminous flux luminaire 177 lm</div></div> <div><div>Beam Angle: 20°</div><table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>1151</td><td>0.36</td></tr><tr><td>2</td><td>288</td><td>0.72</td></tr><tr><td>3</td><td>128</td><td>1.08</td></tr><tr><td>4</td><td>72</td><td>1.44</td></tr><tr><td>5</td><td>46</td><td>1.80</td></tr></table></div> | h(m) | E(lx) | D(m) | 1 | 1151 | 0.36 | 2 | 288 | 0.72 | 3 | 128 | 1.08 | 4 | 72 | 1.44 | 5 | 46 | 1.80 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1151 | 0.36 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 288 | 0.72 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 128 | 1.08 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 72 | 1.44 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 46 | 1.80 | | | | | | | | | | | | | | | | | | | | | | | | |


* Consult factory for other available CCT





Zero Track

High-tech LED lighting system for interior architecture

Find Me 1

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. The maximum number of luminaries that can be feeded with the same power supply is 9. Honeycomb and cross baffle comes standard with the fixture. IP20

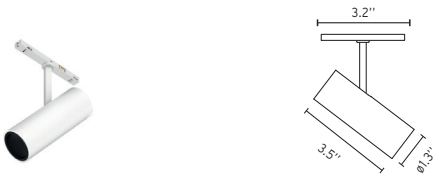

| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric | | | | | | | | | | | | | | | | | |
|-------|-------|----------------|------------------|-------|-------------|-------------|--|-------------|-------|------|---|------|------|---|------|------|---|-----|------|---|-----|------|---|-----|------|
| 2700 | 90 | 450 | 309 | 5.5W | 14° | 09.3812 | <div><div><div></div>40 = White</div><div><div></div>06 = Chrome</div><div><div></div>14 = Black</div><div><div></div>CZ = Bronze</div><div><div></div>18 = Deep brown</div></div> <div><p>Beam Angle: 14°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>4168</td><td>0.24</td></tr><tr><td>2</td><td>1042</td><td>0.48</td></tr><tr><td>3</td><td>463</td><td>0.72</td></tr><tr><td>4</td><td>261</td><td>0.95</td></tr><tr><td>5</td><td>167</td><td>1.19</td></tr></tbody></table><p>4168 cd Luminous flux luminaire 309 lm</p></div> | h(m) | E(lx) | D(m) | 1 | 4168 | 0.24 | 2 | 1042 | 0.48 | 3 | 463 | 0.72 | 4 | 261 | 0.95 | 5 | 167 | 1.19 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4168 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1042 | 0.48 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 463 | 0.72 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 261 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 167 | 1.19 | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 485 | 314 | 5.5W | 14° | 09.3810 | <div><div><div></div>40 = White</div><div><div></div>06 = Chrome</div><div><div></div>14 = Black</div><div><div></div>CZ = Bronze</div><div><div></div>18 = Deep brown</div></div> <div><p>Beam Angle: 14°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>4193</td><td>0.24</td></tr><tr><td>2</td><td>1048</td><td>0.49</td></tr><tr><td>3</td><td>466</td><td>0.73</td></tr><tr><td>4</td><td>262</td><td>0.97</td></tr><tr><td>5</td><td>168</td><td>1.21</td></tr></tbody></table><p>4193 cd Luminous flux luminaire 314 lm</p></div> | h(m) | E(lx) | D(m) | 1 | 4193 | 0.24 | 2 | 1048 | 0.49 | 3 | 466 | 0.73 | 4 | 262 | 0.97 | 5 | 168 | 1.21 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4193 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1048 | 0.49 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 466 | 0.73 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 262 | 0.97 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 168 | 1.21 | | | | | | | | | | | | | | | | | | | | | | | |
| 2700 | 90 | 450 | 186 | 5.5W | 20° | 09.3813 | <div><div><div></div>40 = White</div><div><div></div>06 = Chrome</div><div><div></div>14 = Black</div><div><div></div>CZ = Bronze</div><div><div></div>18 = Deep brown</div></div> <div><p>Beam Angle: 20°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1238</td><td>0.35</td></tr><tr><td>2</td><td>310</td><td>0.70</td></tr><tr><td>3</td><td>138</td><td>1.06</td></tr><tr><td>4</td><td>77</td><td>1.41</td></tr><tr><td>5</td><td>50</td><td>1.76</td></tr></tbody></table><p>1238 cd Luminous flux luminaire 186 lm</p></div> | h(m) | E(lx) | D(m) | 1 | 1238 | 0.35 | 2 | 310 | 0.70 | 3 | 138 | 1.06 | 4 | 77 | 1.41 | 5 | 50 | 1.76 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1238 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 310 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 138 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 77 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 50 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 485 | 193 | 5.5W | 20° | 09.3811 | <div><div><div></div>40 = White</div><div><div></div>06 = Chrome</div><div><div></div>14 = Black</div><div><div></div>CZ = Bronze</div><div><div></div>18 = Deep brown</div></div> <div><p>Beam Angle: 20°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1285</td><td>0.35</td></tr><tr><td>2</td><td>321</td><td>0.70</td></tr><tr><td>3</td><td>143</td><td>1.06</td></tr><tr><td>4</td><td>80</td><td>1.41</td></tr><tr><td>5</td><td>51</td><td>1.76</td></tr></tbody></table><p>1285 cd Luminous flux luminaire 193 lm</p></div> | h(m) | E(lx) | D(m) | 1 | 1285 | 0.35 | 2 | 321 | 0.70 | 3 | 143 | 1.06 | 4 | 80 | 1.41 | 5 | 51 | 1.76 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1285 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 321 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 143 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 80 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 51 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | |

* Consult factory for other available CCT



Zero Track
High-tech LED lighting system for interior architecture

Find Me 2



| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric |
|-------|-----|----------------|------------------|-------|-------------|-------------|---|---|
| 2700 | 90 | 650 | 479 | 10.5W | 10° | 09.3862 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 10° h(m) E(lx) D(m) 1 9244 0.18 2 2311 0.35 3 1027 0.53 4 578 0.70 5 370 0.88</p> <p>Luminous flux luminaire 479 lm</p> |
| 3000 | 90 | 700 | 531 | 10.5W | 10° | 09.3860 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 10° h(m) E(lx) D(m) 1 10249 0.18 2 2562 0.35 3 1139 0.53 4 641 0.70 5 410 0.88</p> <p>Luminous flux luminaire 531 lm</p> |
| 2700 | 90 | 650 | 441 | 10.5W | 19° | 09.3863 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 19° h(m) E(lx) D(m) 1 1991 0.34 2 498 0.67 3 221 1.01 4 124 1.34 5 80 1.68</p> <p>Luminous flux luminaire 441 lm</p> |
| 3000 | 90 | 700 | 489 | 10.5W | 19° | 09.386 1 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 19° h(m) E(lx) D(m) 1 2208 0.34 2 552 0.67 3 245 1.01 4 138 1.34 5 88 1.68</p> <p>Luminous flux luminaire 489 lm</p> |
| 2700 | 90 | 650 | 364 | 10.5W | 32° | 09.3865 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 32° h(m) E(lx) D(m) 1 722 0.57 2 180 1.15 3 80 1.72 4 45 2.29 5 29 2.87</p> <p>Luminous flux luminaire 364 lm</p> |
| 3000 | 90 | 700 | 404 | 10.5W | 32° | 09.3864 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 32° h(m) E(lx) D(m) 1 800 0.57 2 200 1.15 3 89 1.72 4 50 2.29 5 32 2.87</p> <p>Luminous flux luminaire 404 lm</p> |


* Consult factory for other available CCT

Zero Track

High-tech LED lighting system for interior architecture.

Find Me 1 Suspension

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. Module controlled by PWM with 0-10V dimmer or controller. The maximum number of luminaries that can be feeded with the same power supply is 9.

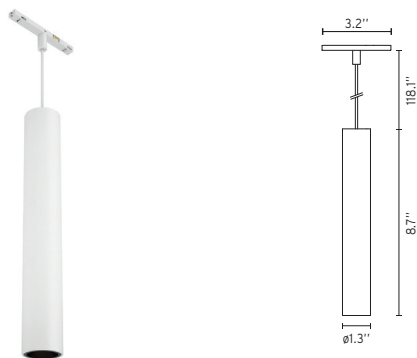

| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric | | | | | | | | | | | | | | | | | | |
|-------|------|----------------|------------------|-------|-------------|-------------|---|---|------|------|------|---|------|------|---|------|------|---|-----|------|---|-----|------|---|-----|------|
| 2700 | 90 | 450 | 309 | 5.5W | 14° | 09.3822 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div>90°</div><div>90°</div><div>60°</div><div>60°</div><div>30°</div><div>30°</div></div><div><div></div><div>4168 cd</div></div><div>Luminous flux luminaire 309 lm</div></div> <div>Beam Angle: 14°<table><tr><th>h(m)</th><th>E lx</th><th>D(m)</th></tr><tr><td>1</td><td>4168</td><td>0.24</td></tr><tr><td>2</td><td>1042</td><td>0.48</td></tr><tr><td>3</td><td>463</td><td>0.72</td></tr><tr><td>4</td><td>261</td><td>0.95</td></tr><tr><td>5</td><td>167</td><td>1.19</td></tr></table></div> | h(m) | E lx | D(m) | 1 | 4168 | 0.24 | 2 | 1042 | 0.48 | 3 | 463 | 0.72 | 4 | 261 | 0.95 | 5 | 167 | 1.19 |
| h(m) | E lx | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4168 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1042 | 0.48 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 463 | 0.72 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 261 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 167 | 1.19 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 485 | 314 | 5.5W | 14° | 09.3820 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div>90°</div><div>90°</div><div>60°</div><div>60°</div><div>30°</div><div>30°</div></div><div><div></div><div>4193 cd</div></div><div>Luminous flux luminaire 314 lm</div></div> <div>Beam Angle: 14°<table><tr><th>h(m)</th><th>E lx</th><th>D(m)</th></tr><tr><td>1</td><td>4193</td><td>0.24</td></tr><tr><td>2</td><td>1048</td><td>0.49</td></tr><tr><td>3</td><td>466</td><td>0.73</td></tr><tr><td>4</td><td>262</td><td>0.97</td></tr><tr><td>5</td><td>168</td><td>1.21</td></tr></table></div> | h(m) | E lx | D(m) | 1 | 4193 | 0.24 | 2 | 1048 | 0.49 | 3 | 466 | 0.73 | 4 | 262 | 0.97 | 5 | 168 | 1.21 |
| h(m) | E lx | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4193 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1048 | 0.49 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 466 | 0.73 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 262 | 0.97 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 168 | 1.21 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2700 | 90 | 450 | 186 | 5.5W | 20° | 09.3823 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div>90°</div><div>90°</div><div>60°</div><div>60°</div><div>30°</div><div>30°</div></div><div><div></div><div>1238 cd</div></div><div>Luminous flux luminaire 186 lm</div></div> <div>Beam Angle: 20°<table><tr><th>h(m)</th><th>E lx</th><th>D(m)</th></tr><tr><td>1</td><td>1238</td><td>0.35</td></tr><tr><td>2</td><td>310</td><td>0.70</td></tr><tr><td>3</td><td>138</td><td>1.06</td></tr><tr><td>4</td><td>77</td><td>1.41</td></tr><tr><td>5</td><td>50</td><td>1.76</td></tr></table></div> | h(m) | E lx | D(m) | 1 | 1238 | 0.35 | 2 | 310 | 0.70 | 3 | 138 | 1.06 | 4 | 77 | 1.41 | 5 | 50 | 1.76 |
| h(m) | E lx | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1238 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 310 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 138 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 77 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 50 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 485 | 193 | 5.5W | 20° | 09.3821 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div><div>90°</div><div>90°</div><div>60°</div><div>60°</div><div>30°</div><div>30°</div></div><div><div></div><div>1285 cd</div></div><div>Luminous flux luminaire 193 lm</div></div> <div>Beam Angle: 20°<table><tr><th>h(m)</th><th>E lx</th><th>D(m)</th></tr><tr><td>1</td><td>1285</td><td>0.35</td></tr><tr><td>2</td><td>321</td><td>0.70</td></tr><tr><td>3</td><td>143</td><td>1.06</td></tr><tr><td>4</td><td>80</td><td>1.41</td></tr><tr><td>5</td><td>51</td><td>1.76</td></tr></table></div> | h(m) | E lx | D(m) | 1 | 1285 | 0.35 | 2 | 321 | 0.70 | 3 | 143 | 1.06 | 4 | 80 | 1.41 | 5 | 51 | 1.76 |
| h(m) | E lx | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1285 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 321 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 143 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 80 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 51 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | | |

* Consult factory for other available CCT

Zero Track

High-tech LED lighting system for interior architecture.

Atom 90

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. The maximum number of luminaries that can be feeded with the same power supply is 9. Honeycomb and cross baffle comes standard with the fixture. IP20



| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric |
|-------|-----|----------------|------------------|-------|-------------|-------------|---|---|
| 2700 | 90 | 450 | 224 | 5.5W | 14° | 09.3831 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 14° h(m) E(lx) D(m) 1 2558 0.25 2 640 0.51 3 284 0.76 4 160 1.02 5 102 1.27 Luminous flux luminaire 224 lm</p> |
| 3000 | 90 | 485 | 247 | 5.5W | 14° | 09.3830 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 14° h(m) E(lx) D(m) 1 2832 0.25 2 708 0.51 3 315 0.76 4 177 1.02 5 113 1.27 Luminous flux luminaire 247 lm</p> |
| 2700 | 90 | 450 | 217 | 5.5W | 21° | 09.3833 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 21° h(m) E(lx) D(m) 1 1362 0.37 2 341 0.73 3 151 1.10 4 85 1.47 5 54 1.84 Luminous flux luminaire 217 lm</p> |
| 3000 | 90 | 485 | 240 | 5.5W | 21° | 09.3832 | 40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown | <p>Beam Angle: 21° h(m) E(lx) D(m) 1 1508 0.37 2 377 0.73 3 168 1.10 4 94 1.47 5 60 1.84 Luminous flux luminaire 240 lm</p> |


* Consult factory for other available CCT





Zero Track

High-tech LED lighting system for interior architecture.

Atom 120

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. The maximum number of luminaries that can be feeded with the same power supply is 9. Honeycomb and cross baffle comes standard with the fixture. IP20

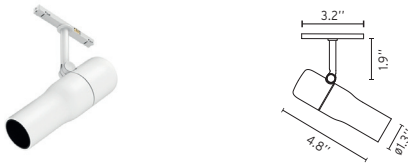

| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric | | | | | | | | | | | | | | | | | | |
|-------|-------|----------------|------------------|-------|-------------|-------------|---|---|------|-------|------|---|------|------|---|------|------|---|-----|------|---|-----|------|---|-----|------|
| 2700 | 90 | 635 | 433 | 8W | 14° | 09.3841 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div>Beam Angle: 14°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5843</td><td>0.24</td></tr><tr><td>2</td><td>1461</td><td>0.48</td></tr><tr><td>3</td><td>649</td><td>0.72</td></tr><tr><td>4</td><td>365</td><td>0.95</td></tr><tr><td>5</td><td>234</td><td>1.19</td></tr></tbody></table><div>Luminous flux luminaire 433 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 5843 | 0.24 | 2 | 1461 | 0.48 | 3 | 649 | 0.72 | 4 | 365 | 0.95 | 5 | 234 | 1.19 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5843 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1461 | 0.48 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 649 | 0.72 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 365 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 234 | 1.19 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 680 | 440 | 8W | 14° | 09.3840 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div>Beam Angle: 14°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5878</td><td>0.24</td></tr><tr><td>2</td><td>1469</td><td>0.49</td></tr><tr><td>3</td><td>653</td><td>0.73</td></tr><tr><td>4</td><td>367</td><td>0.97</td></tr><tr><td>5</td><td>235</td><td>1.21</td></tr></tbody></table><div>Luminous flux luminaire 440 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 5878 | 0.24 | 2 | 1469 | 0.49 | 3 | 653 | 0.73 | 4 | 367 | 0.97 | 5 | 235 | 1.21 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5878 | 0.24 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1469 | 0.49 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 653 | 0.73 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 367 | 0.97 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 235 | 1.21 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2700 | 90 | 635 | 364 | 8W | 20° | 09.3843 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div>Beam Angle: 20°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2557</td><td>0.35</td></tr><tr><td>2</td><td>639</td><td>0.70</td></tr><tr><td>3</td><td>284</td><td>1.06</td></tr><tr><td>4</td><td>160</td><td>1.41</td></tr><tr><td>5</td><td>102</td><td>1.76</td></tr></tbody></table><div>Luminous flux luminaire 364 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 2557 | 0.35 | 2 | 639 | 0.70 | 3 | 284 | 1.06 | 4 | 160 | 1.41 | 5 | 102 | 1.76 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2557 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 639 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 284 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 160 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 102 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 680 | 373 | 8W | 20° | 09.3842 | <div><div></div>40 = White</div> <div><div></div>06 = Chrome</div> <div><div></div>14 = Black</div> <div><div></div>CZ = Bronze</div> <div><div></div>18 = Deep brown</div> | <div><div>Beam Angle: 20°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2624</td><td>0.35</td></tr><tr><td>2</td><td>656</td><td>0.70</td></tr><tr><td>3</td><td>292</td><td>1.06</td></tr><tr><td>4</td><td>164</td><td>1.41</td></tr><tr><td>5</td><td>105</td><td>1.76</td></tr></tbody></table><div>Luminous flux luminaire 373 lm</div></div> | h(m) | E(lx) | D(m) | 1 | 2624 | 0.35 | 2 | 656 | 0.70 | 3 | 292 | 1.06 | 4 | 164 | 1.41 | 5 | 105 | 1.76 |
| h(m) | E(lx) | D(m) | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2624 | 0.35 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 656 | 0.70 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 292 | 1.06 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 164 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 105 | 1.76 | | | | | | | | | | | | | | | | | | | | | | | | |


* Consult factory for other available CCT

Zero Track

High-tech LED lighting system for interior architecture.

Atom 200

LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter inside the fixture body. Module controlled by PMW with 0-10V dimmer or controller. The maximum number of luminaries that can be feeded with the same power supply is 4.

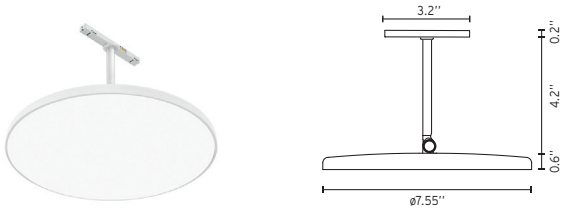

| CCT * | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish | Photometric | | | | | | | | | | | | |
|-------|-------|----------------|------------------|-------|-------------|-------------|---|---|------|------|-------|------|------|------|------|------|------|-------|-----|-------|
| 2700 | 90 | 1050 | 395 | 10.5W | 110° | 09.3851 | <div><div><div></div><div></div><div></div><div></div><div></div></div><div>40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown</div></div> | <div><p>Luminous flux luminaire 395 lm</p><table><tr><th>E(h)</th><th>D(m)</th></tr><tr><td>1 145</td><td>2.86</td></tr><tr><td>2 36</td><td>5.73</td></tr><tr><td>3 16</td><td>8.59</td></tr><tr><td>4 9</td><td>11.45</td></tr><tr><td>5 5</td><td>14.32</td></tr></table></div> | E(h) | D(m) | 1 145 | 2.86 | 2 36 | 5.73 | 3 16 | 8.59 | 4 9 | 11.45 | 5 5 | 14.32 |
| E(h) | D(m) | | | | | | | | | | | | | | | | | | | |
| 1 145 | 2.86 | | | | | | | | | | | | | | | | | | | |
| 2 36 | 5.73 | | | | | | | | | | | | | | | | | | | |
| 3 16 | 8.59 | | | | | | | | | | | | | | | | | | | |
| 4 9 | 11.45 | | | | | | | | | | | | | | | | | | | |
| 5 5 | 14.32 | | | | | | | | | | | | | | | | | | | |
| 3000 | 90 | 1150 | 424 | 10.5W | 110° | 09.3850 | <div><div><div></div><div></div><div></div><div></div><div></div></div><div>40 = White 06 = Chrome 14 = Black CZ = Bronze 18 = Deep brown</div></div> | <div><p>Luminous flux luminaire 424 lm</p><table><tr><th>E(h)</th><th>D(m)</th></tr><tr><td>1 156</td><td>2.86</td></tr><tr><td>2 39</td><td>5.73</td></tr><tr><td>3 17</td><td>8.59</td></tr><tr><td>4 10</td><td>11.45</td></tr><tr><td>5 6</td><td>14.32</td></tr></table></div> | E(h) | D(m) | 1 156 | 2.86 | 2 39 | 5.73 | 3 17 | 8.59 | 4 10 | 11.45 | 5 6 | 14.32 |
| E(h) | D(m) | | | | | | | | | | | | | | | | | | | |
| 1 156 | 2.86 | | | | | | | | | | | | | | | | | | | |
| 2 39 | 5.73 | | | | | | | | | | | | | | | | | | | |
| 3 17 | 8.59 | | | | | | | | | | | | | | | | | | | |
| 4 10 | 11.45 | | | | | | | | | | | | | | | | | | | |
| 5 6 | 14.32 | | | | | | | | | | | | | | | | | | | |

* Consult factory for other available CCT