



Bellhop Wall

Wall Sconce Designed by Edward Barber & Jay Osgerby



Description


Originally conceived as a table lamp for the London Design Museum restaurant, Bellhop moves outdoors. Reminiscent of a hatted hotel porter, Edward Barber & Jay Osgerby's contemporary design offers diffused lighting which enriches landscapes and architecture.  
Bellhop utilizes the latest generation LED technology installed around the lamp head, protected by an opal optic diffuser, allowing a smooth and homogeneous light to radiate all around the pole.

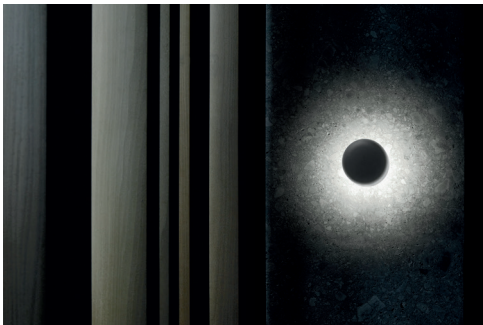

Lamp

Lamps Type	LED
Wattage	8W
Initial Lumens	783 lm, 816 lm, 873 lm
Color Temperature	2700K, 3000K, 4000K
Color rendering	CRI 80

Dimensions



Optical

Beam Angle	85°
Lighting Type	Indirect
Light Distribution	Diffuse

Physical

Material	Aluminium
Aiming	Fixed
Weight	Pounds
Ingress Protection Rating	IP65

Finishes

Painted lacquer

- 01 White 06 Grey 56 Stainless Steel 12 Forest Green 30 Black 18 Deep Brown 33 Anthracite



Installation type	Wall Surface
Environment	Outdoor / Wet Location

Certifications



Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)

Warranty

2 years from date of sale.



Bellhop Wall

Wall Sconce Designed by Edward Barber & Jay Osgerby

Electrical & Control

Voltage	120V
Control	Non Dimmable
Driver	Integral

Performance

Maximum delivered output	607
Efficacy	75.9 lm/W

Notes

Recommended connections for in-ground installations with a 2-way terminal block 4 pole IP68 H<sub>2</sub>O Stop. Not supplied by FLOS, to be ordered separately.


Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment. Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

Bellhop Wall includes a Jbox Cover Plate

Dimensions



Certifications



Class 2

Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)

Warranty


2 years from date of sale.











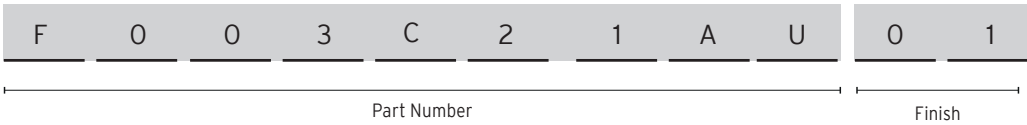




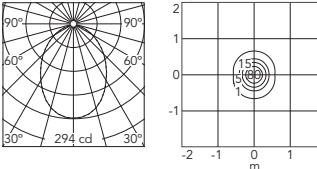








Bellhop Wall

Wall Sconce Designed by Edward Barber & Jay Osgerby

How to specify



POWER LED | Non Dimmable

Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	CRI	Photometrics
F003C21AU01	 White	2700	8W	783	551	80	
F003C21AU06	 Grey						
F003C21AU33	 Anthracite						
F003C21AU30	 Black						
F003C21AU18	 Deep Brown						
F003C21AU56	 Stainless Steel						
F003C21AU12	 Forest Green						
F003C31AU01	 White	3000	8W	816	580		
F003C31AU06	 Grey						
F003C31AU33	 Anthracite						
F003C31AU30	 Black						
F003C31AU18	 Deep Brown						
F003C31AU56	 Stainless Steel						
F003C31AU12	 Forest Green						
F003C41AU01	 White	4000	8W	873	607		
F003C41AU06	 Grey						
F003C41AU33	 Anthracite						
F003C41AU30	 Black						
F003C41AU18	 Deep Brown						
F003C41AU56	 Stainless Steel						
F003C41AU12	 Forest Green						