




Light Modules



Certifications

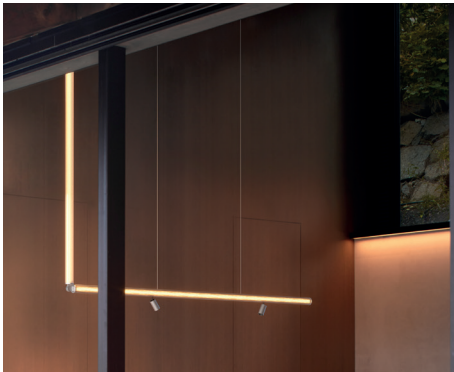

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

5 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

The Glowing Track Suspension

LED lighting system designed to fit any context




Description

Modular and versatile lighting system that combines innovation, high performance and sophisticated design into a single solution. It offers immersive ambient lighting that integrates harmoniously into the environment, providing homogeneous and balanced illumination. Profiles are designed with an efficient assembly system that ensures precise and secure connections, ideal for projects requiring versatile and scalable solutions without compromising on quality or aesthetics.

Lamp

System Lamp Type	Top LED
Color Temperature	2200K / 2700K / 3000K
Color Rendering	CRI 90
Application	General Lighting / Accent lighting

Physical

Material	Aluminum
Ingress Protection Rating	IP20
Finishes	☐ White ☒ Black ☐ Brushed Steel ☐ Brushed Bronze
	   

Installation type	Suspension
Environment	Indoor
Field cuttable	No

Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Driver Output Voltage	24V
Maximum Driver Wattage	Class 2
Control System	On/Off, 1-10V, DALI, Casambi, ELV
Control Light Modules	• Light Shadow Spot and Multi Spot Mini: Non Dimmable / DALI / 1-10V • Find Me and Atom Non Dimmable / Casambi / DALI / 1-10V





The Glowing Track Suspension

LED lighting system designed to fit any context

Notes


EC to supply site cabling from driver to track location.
Wattage per linear foot is dependent upon quantity and type of light modules used.

Light modules are available in the following dimming protocols:

- **Multi Spot Mini:** Non dimmable, DALI, 1-10V
- **Light Shadow Spots:** Non dimmable, DALI, 1-10V
- **Find Me:** Non dimmable, Casambi, DALI, 1-10V
- **Atom:** Non dimmable, Casambi, DALI, 1-10V/3500K, 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.

3500K, 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.

End caps are included.

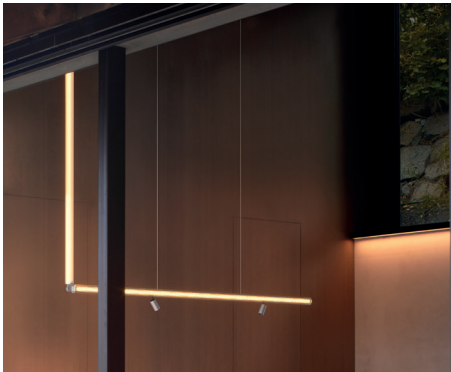

Light Modules



Certifications



Photometrics


For current IES files please visit
arch.flosusa.com

Warranty


5 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

Suspension Installation

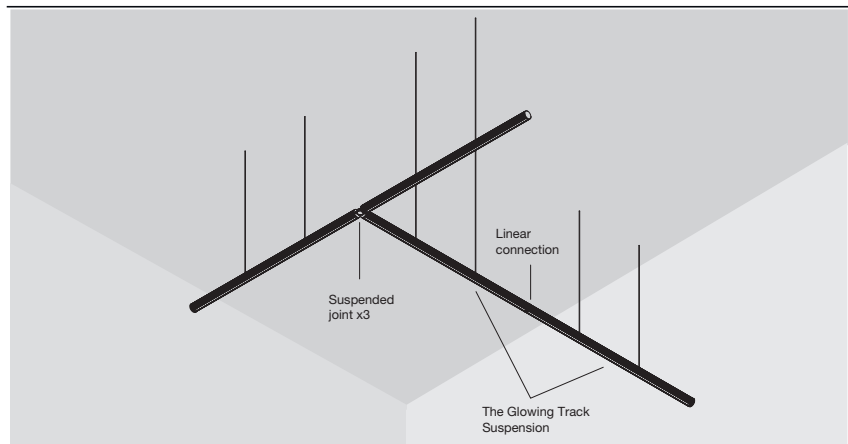


Vertical Installation

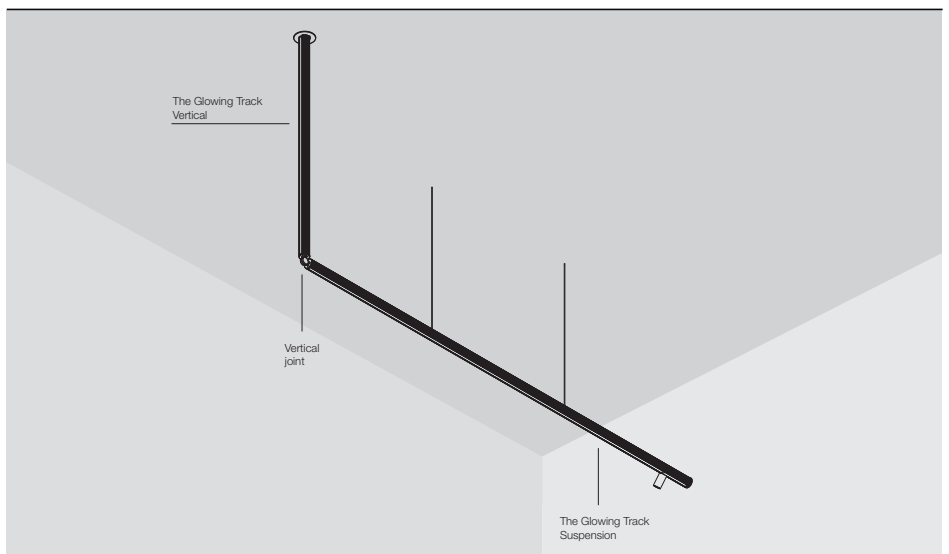


The Glowing Track Suspension

LED lighting system designed to fit any context

How to order

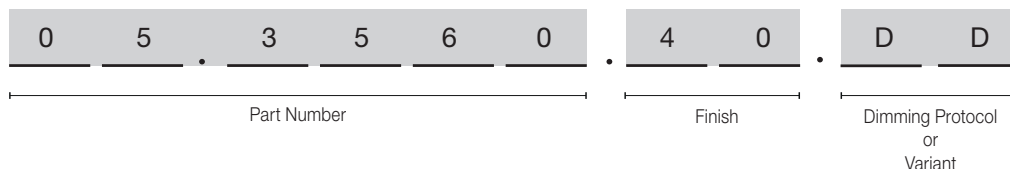

The Glowing Track Suspension

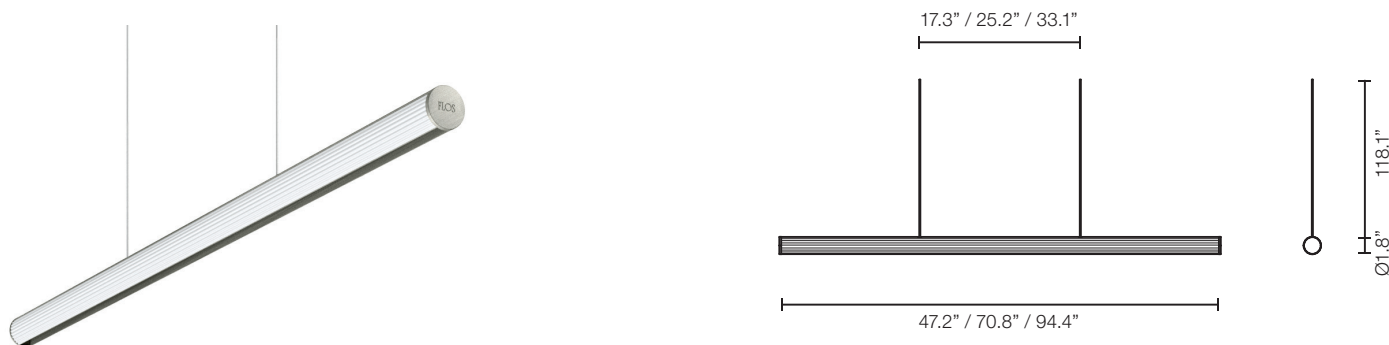

How to specify: 05.4600.40.DA

Length	CRI	CCT	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
47.2" (1200 mm)	90	2200 K	2464 lm	1523 lm	24.8W	05.4600	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	2824 lm	2285 lm		05.4500		
		3000 K	2968 lm	3047 lm		05.4501		
70.8" (1800 mm)	90	2200 K	3639 lm	1746 lm	37.2W	05.4602	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	4236 lm	2619 lm		05.4502		
		3000 K	4452 lm	3492 lm		05.4503		
94.4" (2400 mm)	90	2200 K	4928 lm	1834 lm	49.6W	05.4604	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	5648 lm	2752 lm		05.4504		
		3000 K	5936 lm	3670 lm		05.4505		

Suspension wire color and thickness

DD = DALI - White wire for white profile, black wire for all other finishes, .25" thick

BS = Casambi - Transparent, .15" thick

UL = 1-10V - White wire for white profile, black wire for all other finishes, .32" thick

GT = Phase Cut - White wire for white profile, black wire for all other finishes, .25" thick

The Glowing Track Suspension


LED lighting system designed to fit any context

Mechanical Accessories

Linear Joint
Linear connection used to join components in a straight line.

Part Number:


- 08.1213.40
- 08.1213.14
- 08.1213.ER
- 08.1213.ES



Corner Joint 2
90° corner connector used to join components in the horizontal and vertical plane.

Part Number:


- 08.1206.40
- 08.1206.14
- 08.1206.ER
- 08.1206.ES



Corner Joint 3
Connector used to join three components at right angles

Part Number:


- 08.1207.40
- 08.1207.14
- 08.1207.ER
- 08.1207.ES




Corner Joint 4
Connector used to join four components at right angles.

Part Number:


- 08.1208.40
- 08.1208.14
- 08.1208.ER
- 08.1208.ES




Photometrics The Glowing Track 47.2" (1200mm)

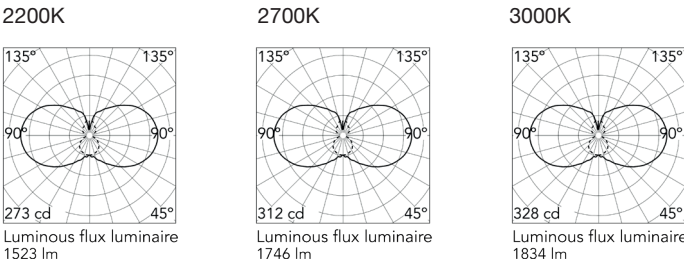

Photometrics The Glowing Track 70.8" (1800mm)

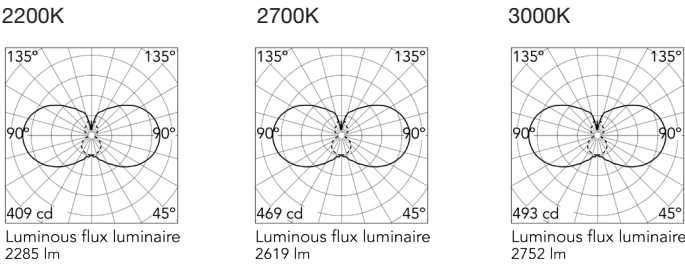

Photometrics The Glowing Track 94.4" (2400mm)

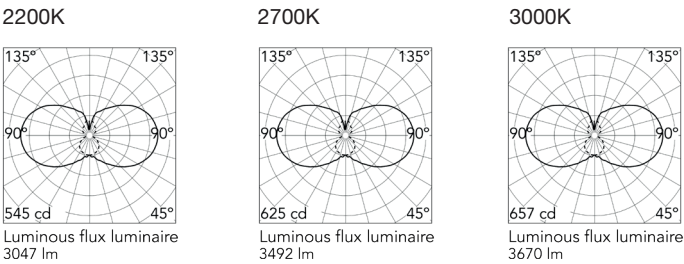

The Glowing Track Suspension Required Accessories

LED lighting system designed to fit any context


Required Accessories - Remote Power Supply

Step 1: Select a Canopy

Surface Canopy

Part Number:

- ☐ 08.1063.40
☒ 08.1063.14

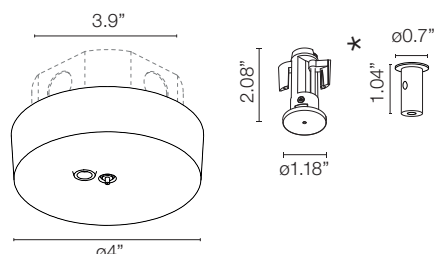


Junction box is not included with regular size surface canopy and is supplied by contractor - 3.9" electrical jbox should be what we show in the dashed drawing by others.
 *Choose the right mounting kit (recessed or surface) according to ceiling conditions.

Recessed Cover Plate

Part Number:

- ☐ 08.1064.40
☒ 08.1064.14

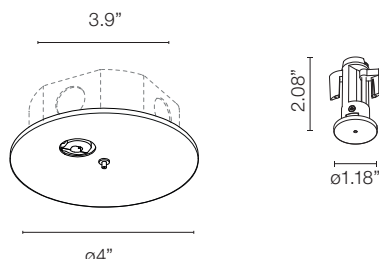


Junction box is not included with recessed canopy plate, provided by others.

Mini Recessed Canopy

Part Number:

- ☐ 08.1065.40
☒ 08.1065.14




Junction box included

Step 2: Select the Power supply

On/Off & 0-10V/DALI/Casambi Integrated.
 LED Driver, 96W 24V Non-Dimmable

Part Number:

LEDSB96W24V-NDM-D1



Remote Power Supply
 LED Driver, 60W 24V, ELV

Part Number:

LEDSB60W24V-TRI-Y1



*Please consult factory for full drivers information

The Glowing Track Suspension Required Accessories

LED lighting system designed to fit any context

Required Accessories - Ceiling Mounted Power Supply


Ceiling Mounted Power Supply Box

Compatible with On/Off/1-10V/DALI/Casambi Integrated Light profiles

LED Driver, 96W 24V Non-Dimmable

Part Number:

- ☐ 08.1066.40
- ☒ 08.1066.14

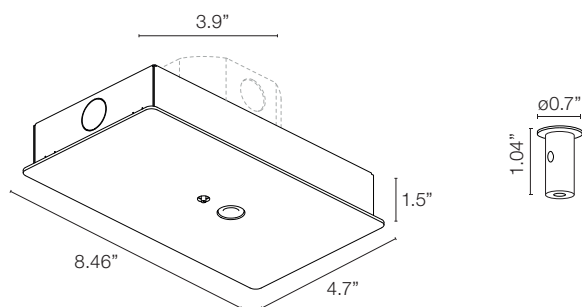


Ceiling Mounted Power Supply Box

Compatible with Phase Cut Light Profile

Track light: LED Driver, 96W 24V Non-Dimmable
Side light: LED Driver, 60W, 24V, ELV/Triac

Part Number:



- ☐ 08.1067.40
- ☒ 08.1067.14

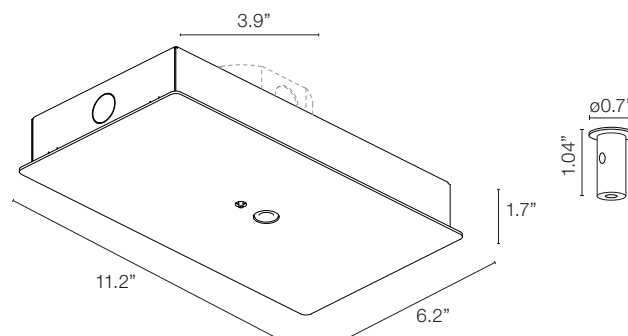

The Glowing Track Suspension 360

LED lighting system designed to fit any context

The Glowing Track 360 Suspension

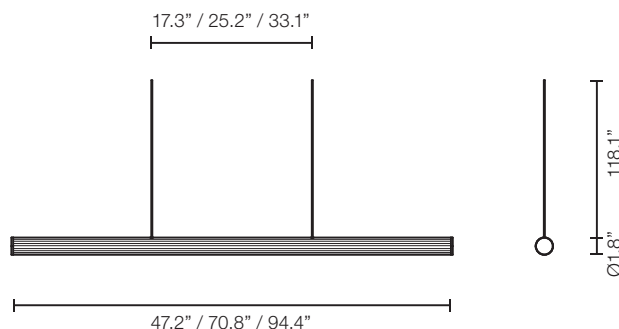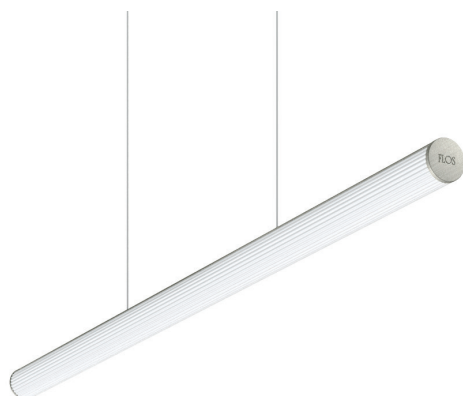

How to specify: 05.4650.40.DA

Length	CRI	CCT	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
47.2" (1200 mm)	90	2200 K	2464 lm	1768 lm	26.8W	05.4650	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	2824 lm	2026 lm		05.4550		
		3000 K	2968 lm	2130 lm		05.4551		
70.8" (1800 mm)	90	2200 K	3639 lm	2652 lm	40.2W	05.4652	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	4236 lm	3040 lm		05.4552		
		3000 K	4452 lm	3195 lm		05.4553		
94.4" (2400 mm)	90	2200 K	4928 lm	3536 lm	53.6W	05.4654	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	5648 lm	4053 lm		05.4554		
		3000 K	5936 lm	4260 lm		05.4555		

Suspension wire color and thickness

DD = DALI - White wire for white profile, black wire for all other finishes, .25" thick

BS = Casambi - Transparent, .15" thick

UL = 1-10V - White wire for white profile, black wire for all other finishes, .25" thick

GT = Phase Cut - Transparent, .15" thick


The Glowing Track 360 Suspension

LED lighting system designed to fit any context


Mechanical Accessories

Linear Joint Linear connection used to join components in a straight line.	Corner Joint 2 90° corner connector used to join components in the horizontal and vertical plane.	Corner Joint 3 Connector used to join three components at right angles	Corner Joint 4 Connector used to join four components at right angles.
Part Number: 08.1213.40 08.1213.14 08.1213.ER 08.1213.ES	Part Number: 08.1206.40 08.1206.14 08.1206.ER 08.1206.ES	Part Number: 08.1207.40 08.1207.14 08.1207.ER 08.1207.ES	Part Number: 08.1208.40 08.1208.14 08.1208.ER 08.1208.ES


Photometrics The Glowing Track 360 47.2" (1200mm)

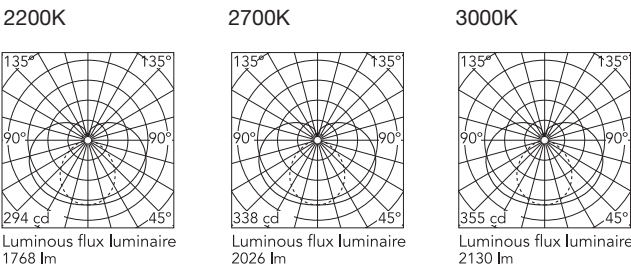

Photometrics The Glowing Track 360 70.8" (1800mm)

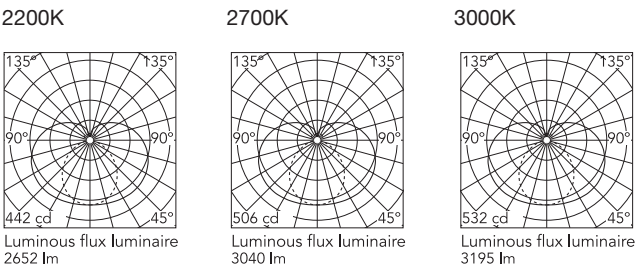

Photometrics The Glowing Track 360 94.4" (2400mm)



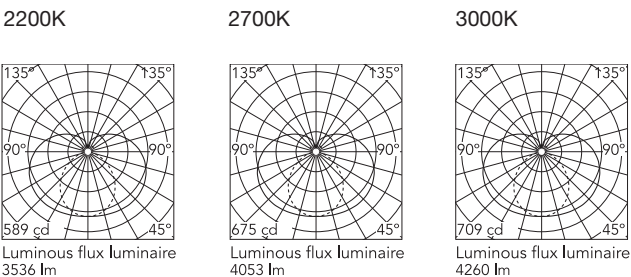


The Glowing Track 360 Suspension Required Accessories


LED lighting system designed to fit any context

Required Accessories - Remote Power Supply

Step 1: Select a Canopy

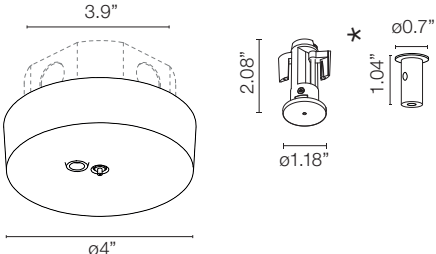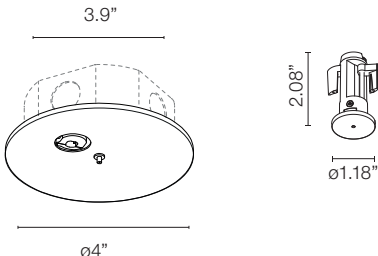Surface Canopy	Recessed Cover Plate	Mini Recessed Canopy
Part Number: ☐ 08.1063.40 ☒ 08.1063.14  Junction box is not included with regular size surface canopy and is supplied by contractor - 3.9" electrical jbox should be what we show in the dashed drawing by others. *Choose the right mounting kit (recessed or surface) according to ceiling conditions.	Part Number: ☐ 08.1064.40 ☒ 08.1064.14  Junction box is not included with recessed canopy plate, provided by others.	Part Number: ☐ 08.1065.40 ☒ 08.1065.14  Junction box included

Step 2: Select the Power supply

On/Off & 0-10V/DALI/Casambi Integrated. LED Driver, 96W 24V Non-Dimmable	Remote Power Supply LED Driver, 60W 24V, ELV
Part Number: LEDSB96W24V-NDM-D1  *Please consult factory for full drivers information	Part Number: LEDSB60W24V-TRI-Y1  *Please consult factory for full drivers information

The Glowing Track 360 Suspension Required Accessories

LED lighting system designed to fit any context

Required Accessories - Ceiling Mounted Power Supply


Ceiling Mounted Power Supply Box

Compatible with On/Off/1-10V/DALI/Casambi Integrated Light profiles

LED Driver, 96W 24V Non-Dimmable

Part Number:

- ☐ 08.1068.40
- ☒ 08.1068.14

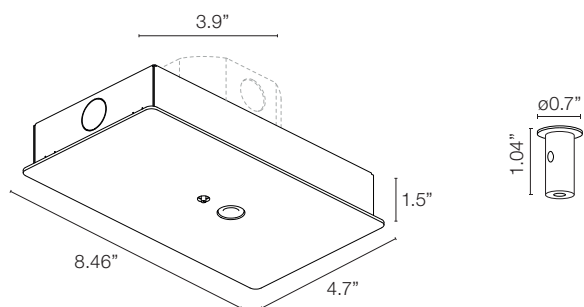


Ceiling Mounted Power Supply Box

Compatible with Phase Cut Light Profile

Part Number:

- ☐ 08.1069.40
- ☒ 08.1069.14

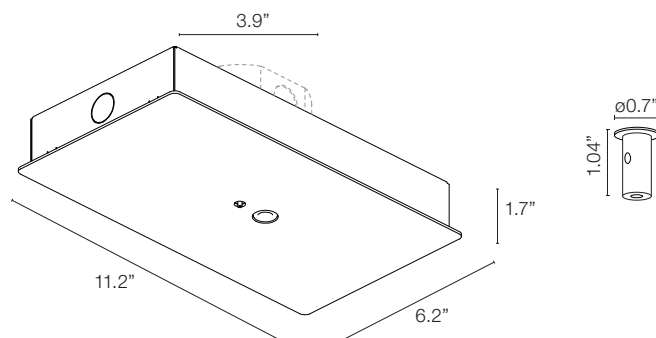

The Glowing Track Blind Suspension

LED lighting system designed to fit any context

Coming Soon

The Glowing Track Blind Suspension



How to specify: 06.2600.40

Length	Part Number	Finish	Control	Variant
47.2" (1200 mm)	06.2660	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	Dimmable	.90
70.8" (1800 mm)	06.2662			
94.4" (2400 mm)	06.2664			
47.2" (1200 mm)	06.2661	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	Non Dimmable	.90
70.8" (1800 mm)	06.2663			
94.4" (2400 mm)	06.2665			

Suspension wire color and thickness

- Dimmable - Transparent, .15" thick
- Non Dimmable - White wire for white profile, black wire for all other finishes, .25" thick

The Glowing Track Blind Suspension

LED lighting system designed to fit any context

Coming Soon


Required Accessories - Remote Power Supply

Step 1: Select a Canopy

Surface Canopy

Part Number:

- ☐ 08.1063.40
☒ 08.1063.14

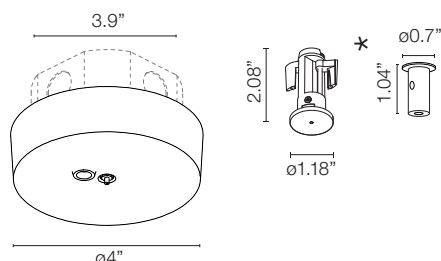


Junction box is not included with regular size surface canopy and is supplied by contractor - 3.9" electrical jbox should be what we show in the dashed drawing by others.

*Choose the right mounting kit (recessed or surface) according to ceiling conditions.

Recessed Cover Plate

Part Number:

- ☐ 08.1064.40
☒ 08.1064.14

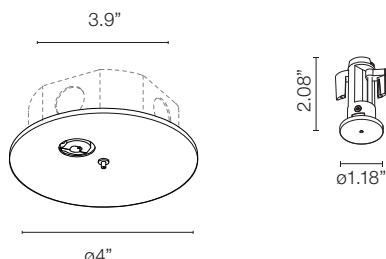


Junction box is not included with recessed canopy plate, provided by others.

Mini Recessed Canopy

Part Number:

- ☐ 08.1065.40
☒ 08.1065.14




Junction box included

Step 2: Select the Power supply

On/Off & 0-10V/DALI/Casambi Integrated.
 LED Driver, 96W 24V Non-Dimmable

Part Number:

LEDSB96W24V-NDM-D1



*Please consult factory for full drivers information

The Glowing Track Blind Suspension

LED lighting system designed to fit any context

Coming Soon

Required Accessories - Ceiling Mounted Power Supply


Ceiling Mounted Power Supply Box

Compatible with On/Off/1-10V/DALI/Casambi Integrated Light profiles

LED Driver, 96W 24V Non-Dimmable

Part Number:


- ☐ 08.1068.40
- ☒ 08.1068.14

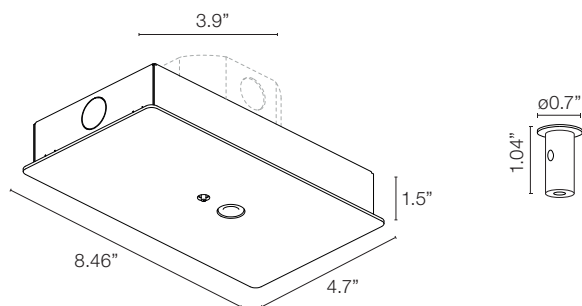

The Glowing Track Vertical

LED lighting system designed to fit any context

The Glowing Track Vertical

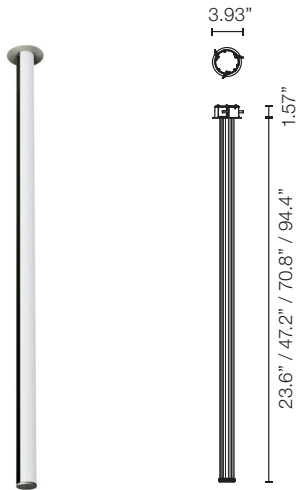


How to specify: 05.4802.40.DD								
Length	CRI	CCT	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
23.6" (600 mm)	90	2200 K	1232 lm	761 lm	12.5W	05.4802	☐ 40 = White ☐ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	1412 lm	873 lm		05.4800		
		3000 K	1484 lm	917 lm		05.4801		
47.2" (1200 mm)	90	2200 K	2464 lm	1523 lm	25W	05.4630	☐ 40 = White ☐ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	2824 lm	1746 lm		05.4530		
		3000 K	2968 lm	1834 lm		05.4531		
70.8" (1800 mm)	90	2200 K	3639 lm	2285 lm	37.5W	05.4632	☐ 40 = White ☐ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	4236 lm	2619 lm		05.4532		
		3000 K	4452 lm	2752 lm		05.4533		
94.4" (2400 mm)	90	2200 K	4928 lm	3047 lm	50W	05.4634	☐ 40 = White ☐ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	5648 lm	3492 lm		05.4534		
		3000 K	5936 lm	3670 lm		05.4535		


The Glowing Track Vertical

LED lighting system designed to fit any context


Photometrics The Glowing Track Vertical 23.6" (600mm)

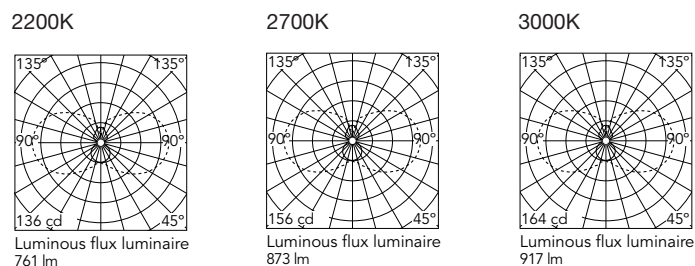


Photometrics The Glowing Track Vertical 47.2" (1200mm)

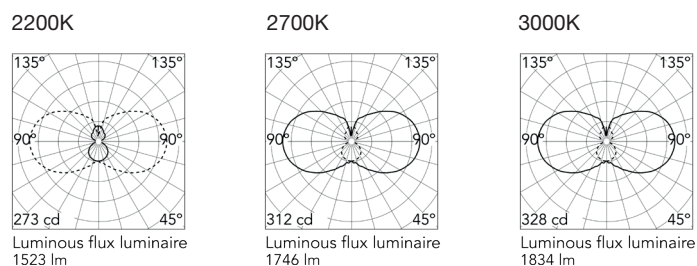

Photometrics The Glowing Track Vertical 70.8" (1800mm)

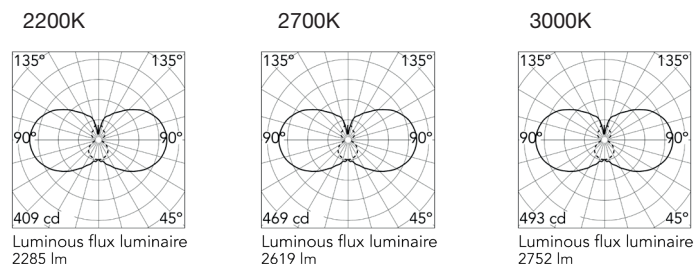


Photometrics The Glowing Track Vertical 94.4" (2400mm)

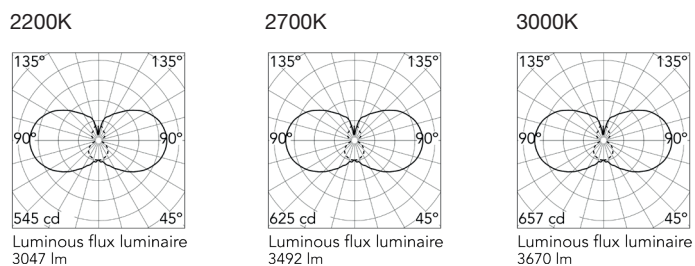

The Glowing Track 360 Vertical

LED lighting system designed to fit any context

The Glowing Track 360 Vertical

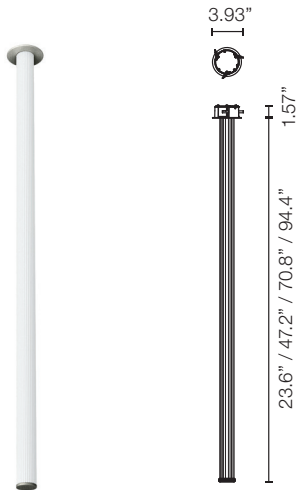


How to specify: 05.4807.40.DD

Length	CRI	CCT	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
23.6" (600 mm)	90	2200 K	1232 lm	884 lm	12.5W	05.4807	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	1412 lm	1013 lm		05.4805		
		3000 K	1484 lm	1065 lm		05.4806		
47.2" (1200 mm)	90	2200 K	2464 lm	1768 lm	25W	05.4680	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	2824 lm	2026 lm		05.4580		
		3000 K	2968 lm	2130 lm		05.4581		
70.8" (1800 mm)	90	2200 K	3639 lm	2652 lm	37.5W	05.4682	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	4236 lm	3040 lm		05.4582		
		3000 K	4452 lm	3195 lm		05.4583		
94.4" (2400 mm)	90	2200 K	4928 lm	3536 lm	50W	05.4684	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	DD = DALI BS = Casambi UL = 1-10V GT = Phase Cut
		2700 K	5648 lm	4053 lm		05.4584		
		3000 K	5936 lm	4260 lm		05.4585		


The Glowing Track 360 Vertical

LED lighting system designed to fit any context


Photometrics The Glowing Track 360 Vertical 23.6" (600mm)

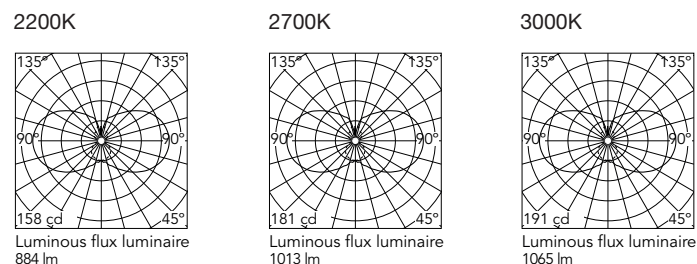


Photometrics The Glowing Track 360 Vertical 47.2" (1200mm)

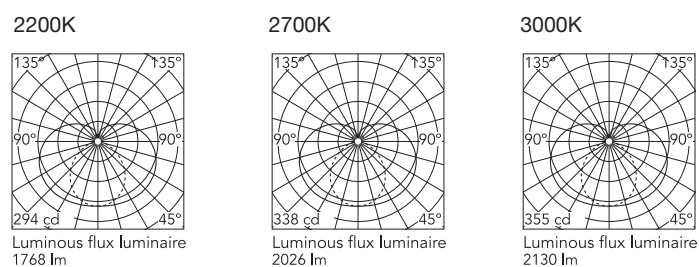

Photometrics The Glowing Track 360 Vertical 70.8" (1800mm)

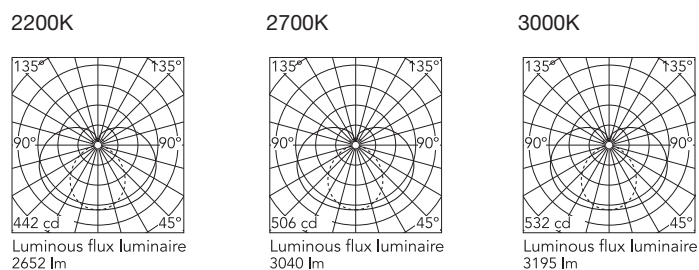

Photometrics The Glowing Track 360 Vertical 94.4" (2400mm)

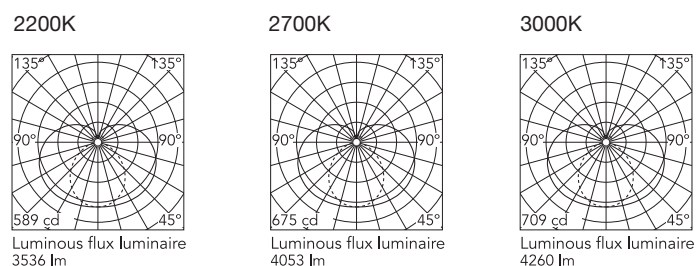


The Glowing Track Blind Vertical

LED lighting system designed to fit any context

Coming Soon


The Glowing Track Blind Vertical

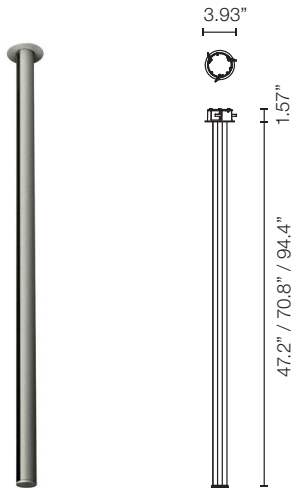

How to specify: 06.2678.40			
Length	Part Number	Finish	Dimming Protocol
47.2" (1200 mm)	06.2678	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	DALI
70.8" (1800 mm)	06.2680		
94.4" (2400 mm)	06.2682		
47.2" (1200 mm)	06.2679	☐ 40 = White ☒ 14 = Black ☐ ER = Brushed Steel ☐ ES = Brushed Bronze	Casambi
70.8" (1800 mm)	06.2681		
94.4" (2400 mm)	06.2683		

The Glowing Track Vertical Required Accessories

LED lighting system designed to fit any context

Optional Accessories	Required Driver
Corner Joint 2 90° corner connector used to join components in the horizontal and vertical plane. Part Number: ☐ 08.1206.40 ☐ 08.1206.14 ☐ 08.1206.ER ☐ 08.1206.ES  	On/Off & 0-10V/DALI/Casambi Integrated. LED Driver, 96W 24V Non-Dimmable Part Number: LEDSB96W24V-NDM-D1  *Please consult factory for full drivers information

The Glowing Track Suspension


Light Modules

The Glowing Track Suspension - Light Modules


LED lighting system designed to fit any context

LIGHT MODULES

How to order

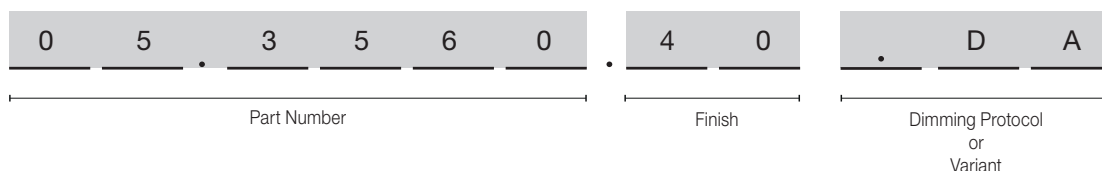

Multi Spot Mini









CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Optic	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	636 lm	408 lm	7W	Spot	05.3560	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable .DA = DALI .1V = 1-10V	
3000 K	90	762 lm	415 lm			05.3561			
2700 K	90	636 lm	433 lm	7W	Medium	05.3562	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable .DA = DALI .1V = 1-10V	
3000 K	90	762 lm	440 lm			05.3563			
2700 K	90	636 lm	401 lm	7W	Flood	05.3564	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable .DA = DALI .1V = 1-10V	
3000 K	90	762 lm	408 lm			05.3565			

The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Light Shadow Spot 30




CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	298 lm	253 lm	4.7W	Spot	05.5170	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable ADA = DALI A1V = 1-10V	
3000 K	90	318 lm	270 lm			05.5175			
2700 K	90	298 lm	257 lm	4.7W	Medium	05.5171	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable ADA = DALI A1V = 1-10V	
3000 K	90	318 lm	274 lm			05.5176			
2700 K	90	298 lm	246 lm	4.7W	Flood	05.5172	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable ADA = DALI A1V = 1-10V	
3000 K	90	318 lm	263 lm			05.5177			

The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Light Shadow Spot 30



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	298 lm	246 lm	4.7W	Wide Flood	05.5173	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	A = Non Dimable ADA = DALI A1V = 1-10V	Beam Angle: 43° h(m) E(lx) D(m) 1 524 0.80 2 131 1.59 3 58 2.39 4 33 3.19 5 21 3.99 Luminous flux luminaire 246 lm
3000 K	90	318 lm	262 lm			05.5178			Beam Angle: 43° h(m) E(lx) D(m) 1 559 0.80 2 140 1.59 3 62 2.39 4 35 3.19 5 22 3.99 Luminous flux luminaire 262 lm


Accessories







Honeycomb	Dichroic CCT Filter
Part Number: 08.0790.00	Part Number: Increase 2700K >> 3125±75K 3000K >> 3600±75K Decrease 2700K >> 2450±75K 3000K >> 2700±75K 08.0791.00 08.0792.00

The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Light Shadow Spot 45



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
2700 K	90	799 lm	650 lm	11W	Spot	05.5180	40 = White 14 = Black	Non Dimable .DA = DALI .1V = 1-10V	 Beam Angle: 15°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>8012</td><td>0.27</td></tr><tr><td>2</td><td>2003</td><td>0.54</td></tr><tr><td>3</td><td>890</td><td>0.80</td></tr><tr><td>4</td><td>501</td><td>1.07</td></tr><tr><td>5</td><td>320</td><td>1.34</td></tr></tbody></table>Luminous flux luminaire 8012 lm	h(m)	E(lx)	D(m)	1	8012	0.27	2	2003	0.54	3	890	0.80	4	501	1.07	5	320	1.34
h(m)	E(lx)	D(m)																									
1	8012	0.27																									
2	2003	0.54																									
3	890	0.80																									
4	501	1.07																									
5	320	1.34																									
3000 K	90	844 lm	686 lm	05.5185	ER = Brushed Steel ES = Brushed Bronze	 Beam Angle: 15°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>8456</td><td>0.27</td></tr><tr><td>2</td><td>2114</td><td>0.54</td></tr><tr><td>3</td><td>940</td><td>0.80</td></tr><tr><td>4</td><td>528</td><td>1.07</td></tr><tr><td>5</td><td>338</td><td>1.34</td></tr></tbody></table>Luminous flux luminaire 8456 lm	h(m)	E(lx)	D(m)	1	8456	0.27	2	2114	0.54	3	940	0.80	4	528	1.07	5	338	1.34			
h(m)	E(lx)	D(m)																									
1	8456	0.27																									
2	2114	0.54																									
3	940	0.80																									
4	528	1.07																									
5	338	1.34																									
2700 K	90	799 lm	645 lm	11W	Medium	05.5181	40 = White 14 = Black	Non Dimable .DA = DALI .1V = 1-10V	 Beam Angle: 21°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5163</td><td>0.36</td></tr><tr><td>2</td><td>1291</td><td>0.73</td></tr><tr><td>3</td><td>574</td><td>1.09</td></tr><tr><td>4</td><td>323</td><td>1.46</td></tr><tr><td>5</td><td>207</td><td>1.82</td></tr></tbody></table>Luminous flux luminaire 5163 lm	h(m)	E(lx)	D(m)	1	5163	0.36	2	1291	0.73	3	574	1.09	4	323	1.46	5	207	1.82
h(m)	E(lx)	D(m)																									
1	5163	0.36																									
2	1291	0.73																									
3	574	1.09																									
4	323	1.46																									
5	207	1.82																									
3000 K	90	844 lm	682 lm	05.5186	ER = Brushed Steel ES = Brushed Bronze	 Beam Angle: 21°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5459</td><td>0.36</td></tr><tr><td>2</td><td>1365</td><td>0.73</td></tr><tr><td>3</td><td>607</td><td>1.09</td></tr><tr><td>4</td><td>341</td><td>1.46</td></tr><tr><td>5</td><td>218</td><td>1.82</td></tr></tbody></table>Luminous flux luminaire 5459 lm	h(m)	E(lx)	D(m)	1	5459	0.36	2	1365	0.73	3	607	1.09	4	341	1.46	5	218	1.82			
h(m)	E(lx)	D(m)																									
1	5459	0.36																									
2	1365	0.73																									
3	607	1.09																									
4	341	1.46																									
5	218	1.82																									
2700 K	90	799 lm	646 lm	11W	Flood	05.5182	40 = White 14 = Black	Non Dimable .DA = DALI .1V = 1-10V	 Beam Angle: 31°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2296</td><td>0.56</td></tr><tr><td>2</td><td>574</td><td>1.11</td></tr><tr><td>3</td><td>255</td><td>1.67</td></tr><tr><td>4</td><td>144</td><td>2.22</td></tr><tr><td>5</td><td>92</td><td>2.78</td></tr></tbody></table>Luminous flux luminaire 2297 lm	h(m)	E(lx)	D(m)	1	2296	0.56	2	574	1.11	3	255	1.67	4	144	2.22	5	92	2.78
h(m)	E(lx)	D(m)																									
1	2296	0.56																									
2	574	1.11																									
3	255	1.67																									
4	144	2.22																									
5	92	2.78																									
3000 K	90	844 lm	682 lm	05.5187	ER = Brushed Steel ES = Brushed Bronze	 Beam Angle: 31°<table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2424</td><td>0.56</td></tr><tr><td>2</td><td>606</td><td>1.11</td></tr><tr><td>3</td><td>269</td><td>1.67</td></tr><tr><td>4</td><td>152</td><td>2.22</td></tr><tr><td>5</td><td>97</td><td>2.78</td></tr></tbody></table>Luminous flux luminaire 2425 lm	h(m)	E(lx)	D(m)	1	2424	0.56	2	606	1.11	3	269	1.67	4	152	2.22	5	97	2.78			
h(m)	E(lx)	D(m)																									
1	2424	0.56																									
2	606	1.11																									
3	269	1.67																									
4	152	2.22																									
5	97	2.78																									

The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Light Shadow Spot 45

Accessories

Honeycomb	Dichroic CCT Filter	
Part Number: 08.0793.00	Part Number: Increase 2700K >> 3125±75K 3000K >> 3600±75K 08.0794.00 Decrease 2700K >> 2450±75K 3000K >> 2700±75K 08.0795.00	
	 	





The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Find Me 0 by Jorge Herrera

No Dim / Casambi



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	276 lm	169 lm	3.5W	Spot	05.5100	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	302 lm	183 lm			05.5105			
2700 K	90	276 lm	179 lm	3.5W	Medium	05.5101	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	302 lm	194 lm			05.5106			





The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Find Me 1 by Jorge Herrera

No Dim / Casambi



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	432 lm	309 lm	5.5W	Spot	05.5110	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	 Beam Angle: 14° h(m) E(lx) D(m) 1 4167 0.24 2 1042 0.48 3 463 0.72 4 260 0.95 5 167 1.19 Luminous flux luminaire 309 lm
3000 K	90	446 lm	314 lm			05.5115			 Beam Angle: 14° h(m) E(lx) D(m) 1 4196 0.24 2 1049 0.49 3 466 0.73 4 262 0.97 5 168 1.21 Luminous flux luminaire 314 lm
2700 K	90	432 lm	284 lm	5.5W	Medium	05.5111	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	 Beam Angle: 20° h(m) E(lx) D(m) 1 1893 0.35 2 473 0.70 3 210 1.06 4 118 1.41 5 76 1.76 Luminous flux luminaire 284 lm
3000 K	90	446 lm	289 lm			05.5116			 Beam Angle: 20° h(m) E(lx) D(m) 1 1927 0.35 2 482 0.70 3 214 1.06 4 120 1.41 5 77 1.76 Luminous flux luminaire 289 lm

The Glowing Track Suspension - Light Modules


LED lighting system designed to fit any context

Find Me 2 by Jorge Herrera

No Dim / Casambi



DALI

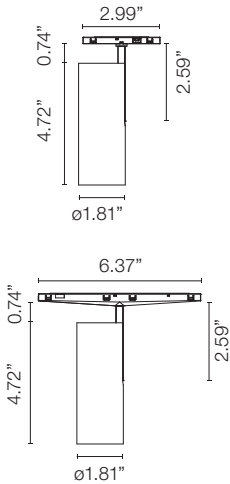


CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	724 lm	479 lm	10.5W	Spot	05.5120	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	781 lm	531 lm			05.5125			
2700 K	90	724 lm	441 lm	10.5W	Medium	05.5121	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	781 lm	489 lm			05.5126			

The Glowing Track Suspension - Light Modules


LED lighting system designed to fit any context

Atom 90 by Piero Lissoni

No Dim / Casambi



DALI



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
2700 K	90	432 lm	224 lm	5.5W	Spot	05.5140	40 = White 14 = Black	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	Beam Angle: 14° <table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2564</td><td>0.25</td></tr><tr><td>2</td><td>641</td><td>0.51</td></tr><tr><td>3</td><td>285</td><td>0.76</td></tr><tr><td>4</td><td>160</td><td>1.02</td></tr><tr><td>5</td><td>103</td><td>1.27</td></tr></tbody></table> Luminous flux luminaire 224 lm	h(m)	E(lx)	D(m)	1	2564	0.25	2	641	0.51	3	285	0.76	4	160	1.02	5	103	1.27
h(m)	E(lx)	D(m)																									
1	2564	0.25																									
2	641	0.51																									
3	285	0.76																									
4	160	1.02																									
5	103	1.27																									
3000 K	90	446 lm	247 lm	05.5145	ER = Brushed Steel ES = Brushed Bronze	Beam Angle: 14° <table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2827</td><td>0.25</td></tr><tr><td>2</td><td>707</td><td>0.51</td></tr><tr><td>3</td><td>314</td><td>0.76</td></tr><tr><td>4</td><td>177</td><td>1.02</td></tr><tr><td>5</td><td>113</td><td>1.27</td></tr></tbody></table> Luminous flux luminaire 247 lm	h(m)	E(lx)	D(m)	1	2827	0.25	2	707	0.51	3	314	0.76	4	177	1.02	5	113	1.27			
h(m)	E(lx)	D(m)																									
1	2827	0.25																									
2	707	0.51																									
3	314	0.76																									
4	177	1.02																									
5	113	1.27																									
2700 K	90	432 lm	261 lm	5.5W	Medium	05.5141	40 = White 14 = Black	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	Beam Angle: 25° <table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1353</td><td>0.45</td></tr><tr><td>2</td><td>338</td><td>0.89</td></tr><tr><td>3</td><td>150</td><td>1.34</td></tr><tr><td>4</td><td>85</td><td>1.79</td></tr><tr><td>5</td><td>54</td><td>2.23</td></tr></tbody></table> Luminous flux luminaire 261 lm	h(m)	E(lx)	D(m)	1	1353	0.45	2	338	0.89	3	150	1.34	4	85	1.79	5	54	2.23
h(m)	E(lx)	D(m)																									
1	1353	0.45																									
2	338	0.89																									
3	150	1.34																									
4	85	1.79																									
5	54	2.23																									
3000 K	90	446 lm	289 lm	05.5146	ES = Brushed Bronze	Beam Angle: 25° <table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1498</td><td>0.45</td></tr><tr><td>2</td><td>375</td><td>0.89</td></tr><tr><td>3</td><td>166</td><td>1.34</td></tr><tr><td>4</td><td>94</td><td>1.79</td></tr><tr><td>5</td><td>60</td><td>2.23</td></tr></tbody></table> Luminous flux luminaire 289 lm	h(m)	E(lx)	D(m)	1	1498	0.45	2	375	0.89	3	166	1.34	4	94	1.79	5	60	2.23			
h(m)	E(lx)	D(m)																									
1	1498	0.45																									
2	375	0.89																									
3	166	1.34																									
4	94	1.79																									
5	60	2.23																									


The Glowing Track Suspension - Light Modules

LED lighting system designed to fit any context

Atom 120 by Piero Lissoni

No Dim / Casambi

DALI

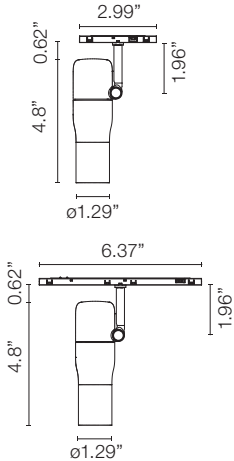

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700 K	90	600 lm	433 lm	8W	Spot	05.5150	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	648 lm	440 lm			05.5155			
2700 K	90	600 lm	364 lm	8W	Medium	05.5151	40 = White 14 = Black ER = Brushed Steel ES = Brushed Bronze	Non Dimable .CB = Casambi .DA = DALI .1V = 1-10V	
3000 K	90	648 lm	373 lm			05.5156			