


Bellhop

Designed by Edward Barber & Jay Osgerby



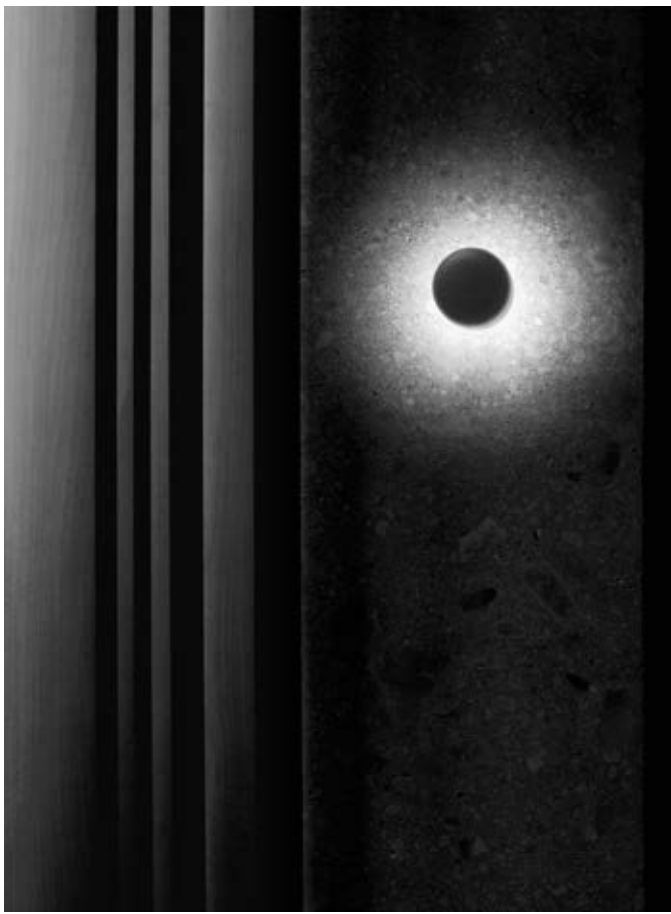

Bellhop Wall



Bellhop Pole



Bellhop Bollard

Family / Familia

Bellhop Wall



Bellhop Bollard



Bellhop Pole



Power Led

8W
551 lm - 2700K/CRI 80
580 lm - 3000K/CRI 80
607 lm - 4000K/CRI 80
[2200K available on request.](#)

Power Led

8W
551 lm - 2700K/CRI 80
580 lm - 3000K/CRI 80
607 lm - 4000K/CRI 80
[2200K available on request.](#)

Power Led

30W
2490 lm - 2700K/CRI 80
2590 lm - 3000K/CRI 80
2760 lm - 4000K/CRI 80
[2200K available on request.](#)

Colours / Colores



01 White*



06 Grey



12 Forest Green*



18 Deep Brown



30 Black*



33 Anthracite



56 Matt Stainless
Steel*

* Only for bollard and wall versions. / Sólo para las versiones bolardo y pared.

Description / Descripción

Bellhop Wall

Wall light version of the Bellhop Outdoor Collection for diffuse light, made of extruded and die-cast aluminium or stainless steel.

Bellhop Bollard

Bollard version of the Bellhop Outdoor Collection for diffuse light. Made of extruded and die-cast aluminium or stainless steel, Bellhop is available in two heights for the bollard model and with different lumens and luminaire outputs as to comply with any outdoor setting and lighting scenario need.

Bellhop Pole

Pole version of the Bellhop Outdoor Collection for diffuse light. Aluminum head mounted on a 3m or 4m long extruded pole, available for installation on rigid surface or in ground.

Bellhop Wall

Versión de pared de la colección Bellhop para exteriores para una luz difusa, hecha con aluminio extruido y fundido o acero inoxidable.

Bellhop Bollard

Versión de bolardo de la colección Bellhop para exteriores para una luz difusa. Hecha de aluminio extruido y fundido o acero inoxidable, Bellhop está disponible en dos alturas para el modelo de bolardo, con distintos lúmenes y haces de luz con el fin de ajustarse a cualquier necesidad de iluminación y configuración de exteriores.

Bellhop Pole

Versión con poste de la colección Bellhop Outdoor para una luz difusa. Cabezal de aluminio montado sobre un poste extruido de 3m o 4m de largo, disponible para su instalación sobre una superficie rígida o en el suelo.