




Captain Flint Wall Outdoor


Wall Outdoor Light Designed by Michael Anastassiades

Description

The Captain Flint family expands with a new wall feature. The iconic floor lamp by Michael Anastassiades is presented in a new configuration for both exterior and interior walls, yet preserves the minimal perfection of the cone. The new wall version completes the collection, ensuring the same familiar feeling and increasing installation versatility thanks to its signature compact shape and the exclusive finishes available.

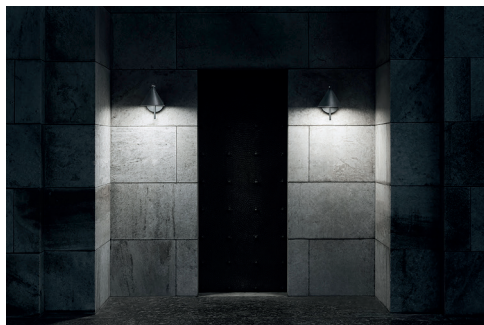

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamps Type	LED
Wattage	9.5W
Output Nominal	1055lm, 1133lm, 1211lm
Color Temperature	2700K, 3000K, 4000K
Color rendering	CRI80

Optical

Beam Angle	112°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum / Glass
Aiming	Fixed
Weight	4.6 Lbs
Ingress Protection Rating	IP65
Finishes	Painted lacquer



55 Brushed
Stainless Steel



18 Deep Brown




30 Black




37 Burgundy Red



59 Brass Finish



Installation type	Wall
Environment	Outdoor, Wet location
Impact protection	IK07

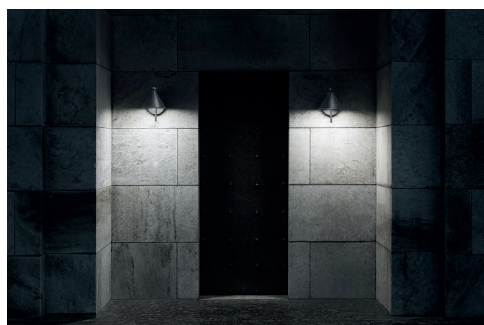

Captain Flint Wall Outdoor

Wall Outdoor Light Designed by Michael Anastassiades


Electrical & Control

Control	Standard 0-10V dimming
Driver	Integral
Input Driver Voltage	120V - 277V

Performance

Maximum delivered output	from 629 lm up to 699 lm
Efficacy	73.5 lm/W

Dimensions



Notes

- Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included.
- Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.
- During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.
- LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment. Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Captain Flint Wall Outdoor

Wall Outdoor Light Designed by Michael Anastassiades

How to specify

Part Number	CCT	Watts	Initial Lumens	Delivered Lumens	CRI	Finish	Dimming Protocol
F011W20AU55	2700K	9.5 W	989 lm	629 lm	>80	Brushed Stainless Steel	0-10V Dimmable
F011W20AU18	2700K	9.5 W	989 lm	629 lm	>80	Deep Brown	
F011W20AU30	2700K	9.5 W	989 lm	629 lm	>80	Black	
F011W20AU37	2700K	9.5 W	989 lm	629 lm	>80	Burgundy Red	
F011W20AU59	2700K	9.5 W	989 lm	629 lm	>80	Brass Finish	
F011W30AU55	3000K	9.5 W	1026 lm	652 lm	>80	Brushed Stainless Steel	
F011W30AU18	3000K	9.5 W	1026 lm	652 lm	>80	Deep Brown	
F011W30AU30	3000K	9.5 W	1026 lm	652 lm	>80	Black	
F011W30AU37	3000K	9.5 W	1026 lm	652 lm	>80	Burgundy Red	
F011W30AU59	3000K	9.5 W	1026 lm	652 lm	>80	Brass Finish	
F011W40AU55	4000K	9.5 W	1099 lm	699 lm	>80	Brushed Stainless Steel	
F011W40AU18	4000K	9.5 W	1099 lm	699 lm	>80	Deep Brown	
F011W40AU30	4000K	9.5 W	1099 lm	699 lm	>80	Black	
F011W40AU37	4000K	9.5 W	1099 lm	699 lm	>80	Burgundy Red	
F011W40AU59	4000K	9.5 W	1099 lm	699 lm	>80	Brass Finish	

Photometrics

3000K

