


Caule Bollard Nest 3

Bollard Outdoor Light Designed by Patricia Urquiola


Description

« Caule is an outdoor collection with simple understated lines yet strong style identity. Copying the botanical structure of a flower, the collection features a real flexible slender stem, almost a natural element, a subtle addition to any outdoor setting. »

Patricia Urquiola

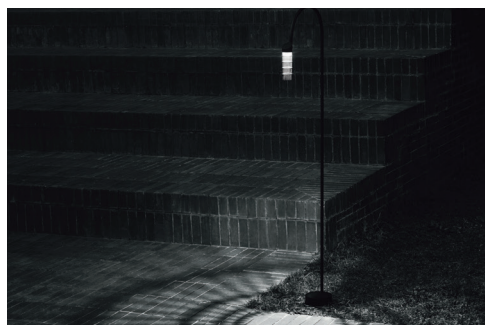

Dimensions

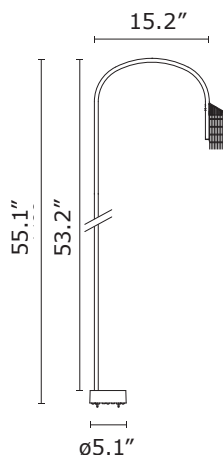

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED
Wattage	5W
Output Nominal	447lm, 480lm, 513lm
Color Temperature	2700K, 3000K, 4000K
Color rendering	CRI 80

Optical

Beam Angle	52°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Fixed
Weight	4.85 Lbs
Ingress Protection Rating	IP66

Finishes

Painted lacquer



Installation type	Ground
Environment	Outdoor, Wet location
Impact protection	IK04



Caule Bollard Nest 3

Bollard Outdoor Light Designed by Patricia Urquiola

Electrical & Control


Voltage	120V
Control	0-10V Dimmable
Driver	Integral

Performance

Maximum delivered output	143lm
Efficacy	28,6lm/W

Notes

Dimensions

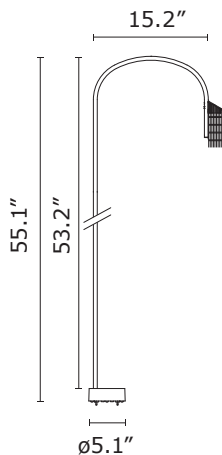

Recommended connections for in-ground installations with a 2-way terminal block 4 pole IP68 H₂O Stop on 24V side. Not supplied by FLOS, to be ordered separately.

Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment. Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Caule Bollard Nest 3

Bollard Outdoor Light Designed by Patricia Urquiola

How to specify



CCT	CRI	Wattage	Initial Lumens	Delivered Lumens	Part Number	Finish	Power Supply
2700K	80	5W	447lm	124lm	F016B23BU01	01 White	Integral Dimmable 0-10V Driver 120V-277V
					F016B23BU12	12 Forest Green	
					F016B23BU06	06 Grey	
					F016B23BU30	30 Black	
					F016B23BU18	18 Deep Brown	
					F016B23BU33	33 Anthracite	
3000K	80	5W	480lm	137lm	F016B33BU01	01 White	Integral Dimmable 0-10V Driver 120V-277V
					F016B33BU12	12 Forest Green	
					F016B33BU06	06 Grey	
					F016B33BU30	30 Black	
					F016B33BU18	18 Deep Brown	
					F016B33BU33	33 Anthracite	
4000K	80	5W	513lm	143lm	F016B43BU01	01 White	Integral Dimmable 0-10V Driver 120V-277V
					F016B43BU12	12 Forest Green	
					F016B43BU06	06 Grey	
					F016B43BU30	30 Black	
					F016B43BU18	18 Deep Brown	
					F016A43BU33	33 Anthracite	

Caule Bollard Nest 3

Bollard Outdoor Light Designed by Patricia Urquiola

Accessories

Box for ground installation.

F016Z000000

