


Captain Flint





Captain Flint

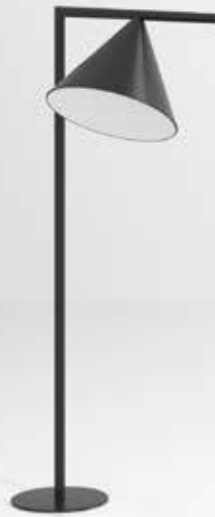

Captain Flint Wall

Family / Familia

Captain Flint Outdoor Floor




CoB Led
11W
1099 lm - 2700K/CRI 80
1140 lm - 3000K/CRI 80
1221 lm - 4000K/CRI 80
2200K available on request.

Captain Flint Outdoor Wall



CoB Led
9,5W
989 lm - 2700K/CRI 80
1026 lm - 3000K/CRI 80
1099 lm - 4000K/CRI 80
2200K available on request.

Captain Flint Outdoor Bollard



CoB Led
9,5W
989 lm - 2700K/CRI 80
1026 lm - 3000K/CRI 80
1099 lm - 4000K/CRI 80
2200K available on request.

Colours / Colores



18 Deep Brown



30 Black



37 Burgundy Red



55 Brushed Stainless Steel



59 Brass Finish

Captain Flint Outdoor Floor - Stone bases



18 Deep Brown/Travertino Imperiale



30 Black/Black Lava



37 Burgundy Red/Black Lava



55 Brushed Stainless Steel/
Occhio di Pernice



59 Brass Finish/Grey Lava

Description / Descripción

Luminaire family with wall version, bollard version and outdoor floor version.

Wall version with fixed head. Rose, frame and cone in 316L polished or painted stainless steel or polished brass finishes. Structural parts have been treated with a chemical conversion process for effective resistance against atmospheric conditions. Diffuser in photo-recorded and injection molded UV-resistant opalescent polycarbonate. LED light source included.

Floor version with 315° adjustable head in horizontal rod, with a robust stone base that comes in various finishes. Available in five standard combinations: black/black lava painted steel, deep brown/travertino imperiale, burgundy red/black lava, satinized brass/grey lava, satinized stainless steel/occhio di pernice. 5-m cable with IP44 Schuko plug suitable for outdoor use. Backlit floor dimmer switch along the IP65 cable enables ON/OFF function and 30–100% brightness regulation.

Familia de luminarias con versión de pared y versión de suelo para exterior.

Versión de pared con cabezal fijo. Roseta, marco y cono con acabado en acero inoxidable 316L pulido, pintado o en latón pulido. Las partes estructurales han sido tratadas con un proceso de conversión química con el fin de conseguir una resistencia eficaz contra los agentes atmosféricos. Difusor en policarbonato opalescente anti-UV fotograbado y moldeado por inyección. Fuente de luz LED incluida.

Versión de suelo con cabezal orientable 315° en varilla horizontal, con una robusta base en piedra disponible en diferentes acabados. Disponible en cinco combinaciones estándar: acero pintado negro/lava negra, acero pintado deep brown/travertino imperial, acero pintado rojo burdeos/lava negra, latón satinado/lava gris, acero inox satinado/ojo de perdiz. Cable de 5 metros apto para uso exterior con enchufe Schuko IP44.

Interruptor de regulación de pedal retroiluminado IP65 a lo largo del cable que garantiza las funciones ON/OFF y la regulación del 30-100% del flujo luminoso.