




Super Line PRO Up&Down


Collection of suspended luminaires for general lighting.

Description

Super Line PRO is a collection of suspended luminaires for general lighting with minimalist profile, designed to offer high performance and light quality without sacrificing visual comfort. The product is designed to meet all requirements to reduce glare and improve visual comfort in offices, complying with the most restrictive conditions. A UGR<16 and a maximum intensity value less than 3000 cd at an angle of 65° guarantee the best conditions for workplaces and make it perfect for many other applications.

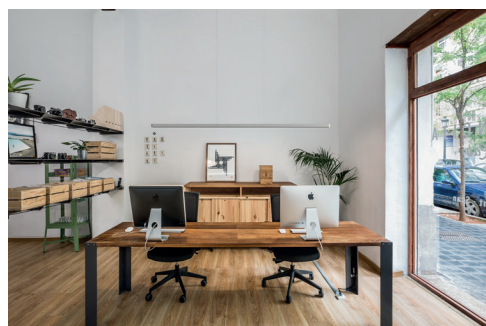

Dimensions

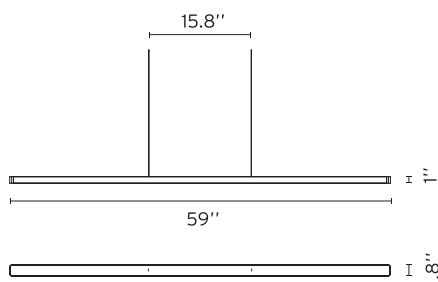

Certifications



Class 3

Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamps Type	LED
Wattage	60W
Output Nominal	3000K: 4075 lm UP / 4605 lm Down 4000K: 4337 lm UP / 4900 lm Down
Color Temperature	3000K, 4000K, *2700K, *3500K (see Notes)
Color rendering	CRI 90

Optical

Beam Angle	101° Up / 80° Down
Lighting Type	General lighting Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Fixed
Weight	1.45Kg - 3.2Lb
Ingress Protection Rating	IP20


Finishes

Painted lacquer

☐ 40 White

☐ 02 Grey

☐ 14 Black



☐ EU Brushed Rose Gold

☐ ET Brushed Brass



Installation type

Ceiling Suspended

Environment

Indoor



Super Line PRO Up&Down

Collection of suspended luminaries for general lighting..

Electrical & Control

Fixture Vf 33Vf Up / 36Vf Down

mA 1050mA

Control See driver option below

Driver LED Remote Driver


Input Driver Voltaje 120V-277V

Performance

Maximum delivered output 3000K: 6314 lm / 4000K: 6172 lm

Efficacy 99.28 lm/W

Dimensions

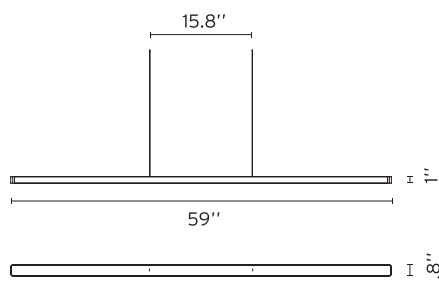

Certifications



Class 3

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Notes

The patented optical system is specifically designed for office lighting applications. The principal lens is made of PMMA. It features a dedicated surface texturing and frosted finish to guarantee the maximum homogeneity of the light.

The optics have an extreme shielding angle that does not compromise the ultra-compact dimensions and high efficiency values of the fixture.

The light engine for the up light has been develop in combination with the lens to control the indirect light and control the luminous spread.

Super Line PRO Up & Down is a unique solution when compared to Super Line.

To minimize the visual impact, the suspension cables are also the feed wires, which eliminates the need for an additional power supply cable. Suspension length: 13ft.


On the Up & Down version each suspension point controls either up light or down light and is identified by a specific print on the product.

3000K and 4000K are the standard CCT for Super Line Family, 2700K and 3500K available but not cataloged. Consult factory.

Super Line PRO Up&Down

Collection of suspended luminaries for general lighting.

How to specify

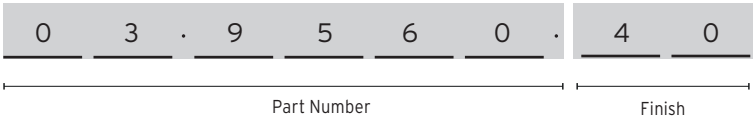

Majority UP

Part Number	Finish	CCT	Watts	Initial lumens Majority UP	Delivered Down Majority UP	Lumens Up Majority DOWN	Lumens Up Majority DOWN	Beam Angle	CRI	Photometrics
03.9560.40	White	3000	60W	4075	2500	2590	4605	101° Up 80° Down	90	<p>Beam Angle: 80° h(m) E(lx) D(m) 1 1493 1.68 2 373 3.35 3 166 5.03 4 93 6.71 5 60 8.38 1493 cd Luminous flux luminaire 6135 lm</p>
03.9560.02	Grey									
03.9560.14	Black									
03.9560.EU	Brushed Rose Gold									
03.9560.ET	Brushed Brass									
03.9561.40	White	4000	60W	4335	2660	2755	4900	101° Up 80° Down	90	<p>Beam Angle: 80° h(m) E(lx) D(m) 1 1515 1.68 2 379 3.35 3 168 5.03 4 95 6.71 5 61 8.38 1515 cd Luminous flux luminaire 6172 lm</p>
03.9561.02	Grey									
03.9561.14	Black									
03.9561.EU	Brushed Rose Gold									
03.9561.ET	Brushed Brass									

Required Accessories

Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 1050mA , 40W, 0-10V Dimmable, 120/277V.	Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 600mA , 40W, 0-10V Dimmable, 120/277V	Remote Suspension KIT : Includes two suspension kits.
Part Number: SP40W1050MA-10V-A01	Part Number: SP40W600MA-10V-A01	Part Number: 08.0642.40.19 08.0642.02.19 08.0642.14.19 08.0642.EU.19 08.0642.ET.19

Super Line PRO Up&Down

Collection of suspended luminaries for general lighting.

Drivers Options

Table with 3 columns: Configuration, Driver for Up light, Driver for down light. Rows include Up&Down Majority UP, Up&Down Majority DOWN.

The driver cannot be set above 1050mA as over driving may damage the LED due to excessive heat.

Table with 3 columns: Light emission, UGR*, L 65° < 3000 cd. Rows show UGR values for Majority Up, Majority Down, and Down configurations.

Remote Suspension Kit

