

## Super Line Up&Down Indirect


Collection of suspended luminaires for general lighting.

### Description

Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.



### Dimensions

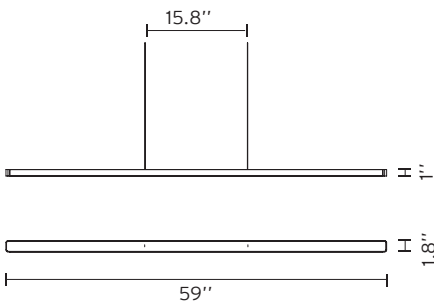

### Certifications



Class 2

### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Lamp

Lamps Type	LED
Wattage	58W
Output Nominal	3000K: 4488lm UP / 2160lm Down 4000K: 4794lm UP / 2280lm Down
Color Temperature	3000K, 4000K, *2700K, *3500K (see Notes)
Color rendering	CRI 90


### Optical

Beam Angle	101° Up / 82° Down
Lighting Type	General lighing Direct / Indirect
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Fixed
Weight	1.45Kg - 3.2Lb
Ingress Protection Rating	IP20

### Finishes

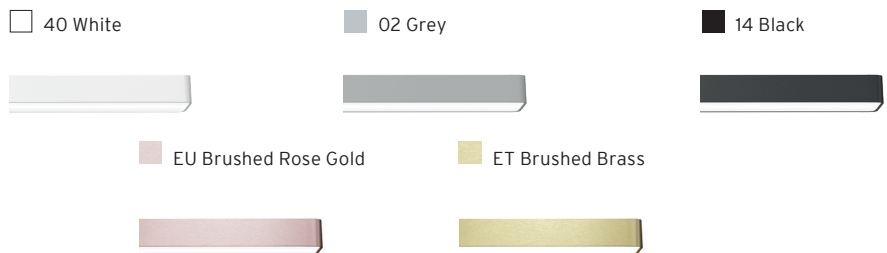

Installation type	Ceiling Suspended
Environment	Indoor



## Super Line Up&Down Indirect

Collection of suspended luminaries for general lighting..


### Electrical & Control

Fixture Vf	55.8Vf
mA	1050mA
Control	See driver option below
Driver	LED Remote Driver
Input Driver Voltaje	120V-277V

### Performance

Maximum delivered output	3000K: 4914lm / 4000K: 5225lm
Efficacy	87.08lm/W

### Dimensions

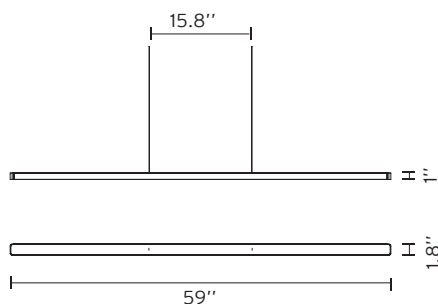

### Certifications



Class 2

### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Notes

The light engine for the up light has been develop in combination with the lens to control the indirect light and control the luminous spread.

To minimize the visual impact, the suspension cables are also the feed wires, which eliminates the need for an additional power supply cable. Suspension length: 13ft.


On the Up & Down version each suspension point controls either up light or down light and is identified by a specific print on the product.

3000K and 4000K are the standard CCT for Super Line Family, 2700K and 3500K available but not cataloged. Consult factory.













Super Line Up&Down Indirect

Collection of suspended luminaries for general lighting.

How to specify



Super Line Up&Down Indirect

Part Number	Finish	CCT	Watts	UP Lumens	Down Lumens	Beam Angle	CRI	Photometrics																		
03.9502.40	 White	3000	58W	4488 lm	2268 lm	101° Up 82° Down	90	<div><p>Beam Angle DIR: 101°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1229</td><td>2.39</td></tr><tr><td>2</td><td>307</td><td>4.78</td></tr><tr><td>3</td><td>137</td><td>7.17</td></tr><tr><td>4</td><td>77</td><td>9.57</td></tr><tr><td>5</td><td>49</td><td>11.96</td></tr></tbody></table><p>Luminous flux luminaire 4914 lm</p></div>	h(m)	E(lx)	D(m)	1	1229	2.39	2	307	4.78	3	137	7.17	4	77	9.57	5	49	11.96
h(m)	E(lx)								D(m)																	
1	1229								2.39																	
2	307								4.78																	
3	137								7.17																	
4	77	9.57																								
5	49	11.96																								
03.9502.02	 Grey																									
03.9502.14	 Black																									
03.9502.EU	 Brushed Rose Gold																									
03.9502.ET	 Brushed Brass																									
03.9503.40	 White	4000	58W	4794 lm	2376 lm	101° Up 82° Down	90	<div><p>Beam Angle DIR: 101°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1307</td><td>2.39</td></tr><tr><td>2</td><td>327</td><td>4.78</td></tr><tr><td>3</td><td>145</td><td>7.17</td></tr><tr><td>4</td><td>82</td><td>9.57</td></tr><tr><td>5</td><td>52</td><td>11.96</td></tr></tbody></table><p>Luminous flux luminaire 5225 lm</p></div>	h(m)	E(lx)	D(m)	1	1307	2.39	2	327	4.78	3	145	7.17	4	82	9.57	5	52	11.96
h(m)	E(lx)								D(m)																	
1	1307								2.39																	
2	327								4.78																	
3	145								7.17																	
4	82	9.57																								
5	52	11.96																								
03.9503.02	 Grey																									
03.9503.14	 Black																									
03.9503.EU	 Brushed Rose Gold																									
03.9503.ET	 Brushed Brass																									

Required Accessories

Splice Box: 9-7/8" X 3-3/8" X 1-5/8" H, With Driver  
Programmed by default to 1050mA , 60W, 0-10V ,  
Dimmable, 120V/277V



Remote Suspension KIT : Includes two suspension kits.  
(To be ordered separately)-

Part Number:

Part Number:

SP60W1050MA-10V-E01

- 08.0524.40.19
- 08.0524.02.19
- 08.0524.14.19
- 08.0524.EU.19
- 08.0524.ET.19

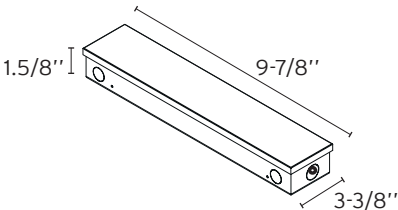

Super Line Up&Down Indirect

Collection of suspended luminaries for general lighting.

Requirements UGR<19 and L 65°<3000 cd. at maxium power

Table with 6 columns: Driver setting, Light emission, UGR\*, L 65° < 3000 cd (under Indirect), UGR\* (under Direct), L 65° < 3000 cd (under Direct). Rows show settings from 1050 mA to 350 mA.

\*X=4H, Y=8H, S=0.25H, reflections 70/50/20

Remote Suspension Kit

