


Super Line Down

Collection of suspended luminaires for general lighting.

Description


Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

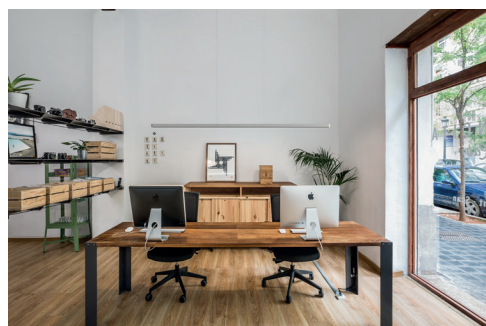

Lamp

Lamps Type	LED
Wattage	39W
Output Nominal	3000K: 4488 lm / 4000K: 4794 lm
Color Temperature	3000K, 4000K, *2700K, *3500K (see Notes)
Color rendering	CRI 90

Dimensions

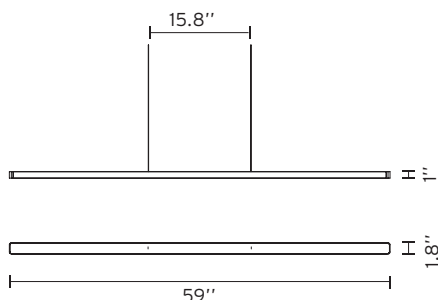

Optical

Beam Angle	82°
Lighting Type	General lighting Direct
Light Distribution	Symmetric



Physical

Material	Aluminum
Aiming	Fixed
Weight	1.45Kg - 3.2Lb
Ingress Protection Rating	IP20
Finishes	Painted lacquer

☐ 40 White

☐ 02 Grey

☐ 14 Black



☐ EU Brushed Rose Gold

☐ ET Brushed Brass



Certifications



Class 2

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Installation type	Ceiling Suspended
Environment	Indoor



Super Line Down

Collection of suspended luminaries for general lighting..


Electrical & Control

Fixture Vf	37.2Vf
mA	1050mA
Control	See driver option below
Driver	LED Remote Driver
Input Driver Voltage	120V-277V

Performance

Maximum delivered output	3000K: 3571 lm / 4000K: 3814 lm
Efficacy	92 lm/W

Dimensions

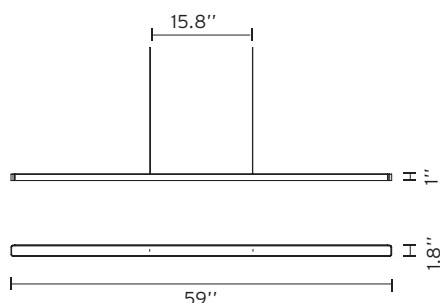

Notes

To minimize the visual impact, the suspension cables are also the feed wires, which eliminates the need for an additional power supply cable. Suspension length: 13ft.

3000K and 4000K are the standard CCT for Super Line Family, 2700K and 3500K available but not cataloged. Consult factory.

Certifications



Class 2

Photometrics


For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Super Line Down

Collection of suspended luminaries for general lighting.

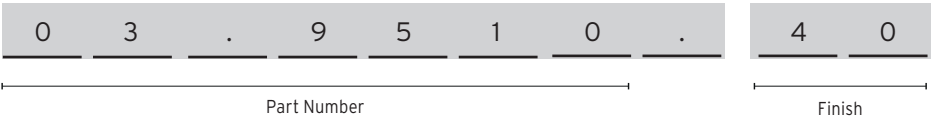

Super Line Down

Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics
03.9510.40	White	3000	39W	4488	3571	82°	90	<p>Beam Angle: 82° h(m) E(lx) D(m) 1 1948 1.57 2 487 3.13 3 216 4.70 4 122 6.27 5 78 7.84 Luminous flux luminaire 3571 lm</p>
03.9510.02	Grey							
03.9510.14	Black							
03.9510.EU	Brushed Rose Gold							
03.9510.ET	Brushed Brass							
03.9511.40	White	4000	39W	4794	3814	82°	90	<p>Beam Angle: 82° h(m) E(lx) D(m) 1 2080 1.57 2 520 3.13 3 231 4.70 4 130 6.27 5 83 7.84 Luminous flux luminaire 3814 lm</p>
03.9511.02	Grey							
03.9511.14	Black							
03.9511.EU	Brushed Rose Gold							
03.9511.ET	Brushed Brass							



Required Accessories

Remote Splice Box UL 9.5"x2.5"x1.5", With Driver
Programmed by default to 1050mA , 40W, 0-10V Dimmable, 120V/277V

Remote Suspension KIT : Includes two suspension kits.

Part Number:
SP40W1050MA-10V-A02

Part Number:
08.0524.40.19
08.0524.02.19
08.0524.14.19
08.0524.EU.19
08.0524.ET.19



Super Line Down



Collection of suspended luminaries for general lighting.

Requirements UGR<19 and L 65°<3000 cd. at maxium power

Table with 6 columns: Driver setting, Light emission, UGR*, L 65° < 3000 cd, UGR*, L 65° < 3000 cd. Rows show settings from 1050 mA to 350 mA.

*X=4H, Y=8H, S=0.25H, reflections 70/50/20

Photometrics

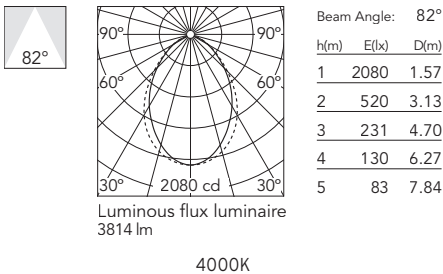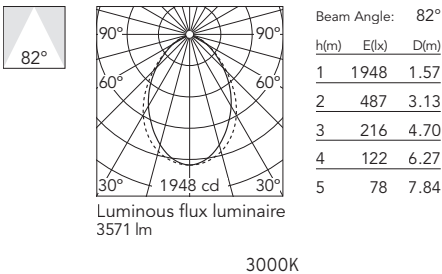

Remote Suspension Kit

