



## Super Line PRO Down


Collection of suspended luminaires for general lighting.

### Description

Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.



### Dimensions

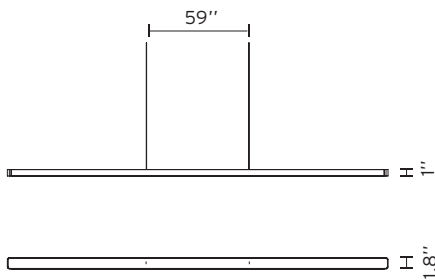

### Certifications



Class 3

### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Lamp

Lamps Type	LED
Wattage	40W
Output Nominal	3000K: 4765lm 4000K: 5072lm
Color Temperature	3000K, 4000K, *2700K, *3500K (see Notes)
Color rendering	CRI 90


### Optical

Beam Angle	80°
Lighting Type	General lighting Direct
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Fixed
Weight	1.45Kg - 3.2Lb
Ingress Protection Rating	IP20
Finishes	Painted lacquer


☐ 40 White



☐ 02 Grey



☐ 14 Black



☐ EU Brushed Rose Gold



☐ ET Brushed Brass



### Installation type

Ceiling Suspended

### Environment

Indoor



## Super Line PRO Down

Collection of suspended luminaries for general lighting.


### Electrical & Control

Fixture Vf	37Vf
mA	1050mA
Control	See driver option below
Driver	LED Remote Driver
Input Driver Voltage	120V-277V

### Performance

Maximum delivered output	3000K: 3955 lm / 4000K: 3801 lm
Efficacy	97.46 lm/W

### Dimensions

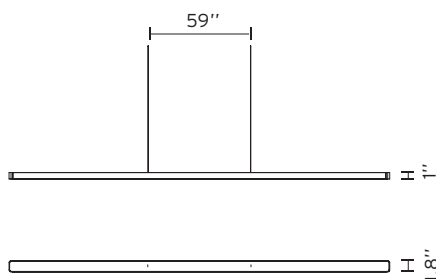

### Notes

The patented optical system is specifically designed for office lighting applications. The principal lens is made of PMMA. It features a dedicated surface texturing and frosted finish to guarantee the maximum homogeneity of the light.

The optics have an extreme shielding angle that does not compromise the ultra-compact dimensions and high efficiency values of the fixture.

The light engine for the up light has been develop in combination with the lens to control the indirect light and control the luminous spread.

To minimize the visual impact, the suspension cables are also the feed wires, which eliminates the need for an additional power supply cable. Suspension length: 13ft.

On the Up & Down version each suspension point controls either up light or down light and is identified by a specific print on the product.

3000K and 4000K are the standard CCT for Super Line Family, 2700K and 3500K available but not cataloged. Consult factory.

### Certifications



Class 3

### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)


### Warranty

2 years from date of sale.











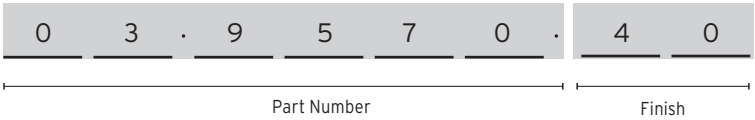

Super Line PRO Down

Collection of suspended luminaries for general lighting.

How to specify




Super Line Pro Down

Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics																								
03.9570.40	 White	3000	40W	4765	3955	80°	90	 <p>Beam Angle: 80°</p> <table><thead><tr><th></th><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2367</td><td>1.68</td><td></td></tr><tr><td>2</td><td>592</td><td>3.36</td><td></td></tr><tr><td>3</td><td>263</td><td>5.04</td><td></td></tr><tr><td>4</td><td>148</td><td>6.72</td><td></td></tr><tr><td>5</td><td>95</td><td>8.40</td><td></td></tr></tbody></table> <p>Luminous flux luminaire 3955 lm</p>		h(m)	E(lx)	D(m)	1	2367	1.68		2	592	3.36		3	263	5.04		4	148	6.72		5	95	8.40	
	h(m)								E(lx)	D(m)																						
1	2367								1.68																							
2	592								3.36																							
3	263								5.04																							
4	148	6.72																														
5	95	8.40																														
03.9570.02	 Grey																															
03.9570.14	 Black																															
03.9570.EU	 Brushed Rose Gold																															
03.9570.ET	 Brushed Brass																															
03.9571.40	 White	4000	40W	5070	3801	80°	90	 <p>Beam Angle: 80°</p> <table><thead><tr><th></th><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>2275</td><td>1.68</td><td></td></tr><tr><td>2</td><td>569</td><td>3.36</td><td></td></tr><tr><td>3</td><td>253</td><td>5.04</td><td></td></tr><tr><td>4</td><td>142</td><td>6.72</td><td></td></tr><tr><td>5</td><td>91</td><td>8.40</td><td></td></tr></tbody></table> <p>Luminous flux luminaire 3801 lm</p>		h(m)	E(lx)	D(m)	1	2275	1.68		2	569	3.36		3	253	5.04		4	142	6.72		5	91	8.40	
	h(m)								E(lx)	D(m)																						
1	2275								1.68																							
2	569								3.36																							
3	253								5.04																							
4	142	6.72																														
5	91	8.40																														
03.9571.02	 Grey																															
03.9571.14	 Black																															
03.9571.EU	 Brushed Rose Gold																															
03.9571.ET	 Brushed Brass																															

Required Accessories


Remote Splice Box UL 9.5"x2.5"x1.5", With Driver  
Programmed by default to 1050mA , 40W, 0-10V Dimmable, 120V/277V

Part Number:  
SP40W1050MA-10V-A02

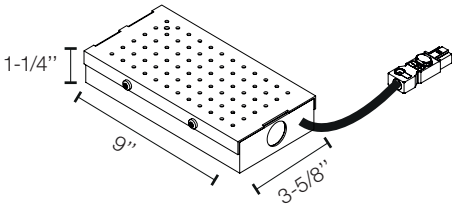

Remote Suspension KIT : Includes two suspension kits.  
(To be ordered separately).

Part Number:  
08.0524.40.19  
08.0524.02.19  
08.0524.14.19  
08.0524.EU.19  
08.0524.ET.19

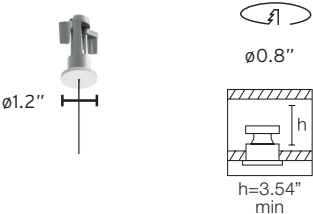

Super Line PRO Down

Collection of suspended luminaries for general lighting.

Drivers Options

Table with 3 columns: Light emission, UGR\*, and L 65° < 3000 cd. It lists three lighting configurations: 'Up & Down Majority Up', 'Up & Down Majority Down', and 'Down', each with corresponding UGR and luminance values.

Remote Suspension Kit

