

Landlord Soft

Adjustable head for installation on outdoor ground poles.

Description

Landlord is the lord of the earth and the lord of light... and if you are a flower or a tree or a simple two or four-legged animal, you have to ask Landlord for permission if you want to pass unharmed through the night. The Landlord Soft P65 projector for external use, designed to offer diffuse lighting. It is characterized by an aluminium disk shape head, orientable up to 20° beam and lockable in position, to be powered at 24V, and available in 2700K, 3000K and 4000K colour temperature. It is the perfect tool to light bushes, flowerbed and transit areas with an homogenous diffuse light beam. Landlord Soft can be installed on solid ground spikes, with the possibility of an optional picket.

Lamp

Lamps Type	LED
Wattage	5W
Output Nominal	379lm
Color Temperature	2700K
Color rendering	CRI80

Optical

Beam Angle	51°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	0.8 Pounds
Ingress Protection Rating	IP66


Finishes

Painted lacquer

01 White	06 Grey	71 Anodized Black	30 Black	18 Deep Brown	12 Forest Green	33 Anthracite
----------	---------	-------------------	----------	---------------	-----------------	---------------



Dimensions

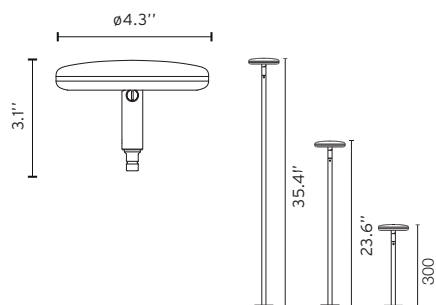

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Installation type

Wall surface (Includes JBOX Cover Plate)

Environment

Outdoor / Wet location



Landlord Soft

Adjustable head for installation on outdoor ground poles.

Electrical & Control

Input Fixture Voltage	24V
Control	Forward + Reverse Phase, 0-10V Dimming
Driver	Remote
Input Driver Voltage	120 - 277V
Output Driver Voltage	24V

Performance

Maximum delivered output	242
Efficacy	48.4 lm/W

Notes

Recommended connections for in-ground installations with a 2-way terminal block 4 pole IP68 H₂O Stop. Not supplied by FLOS, to be ordered separately.

The aluminum versions are finished with a high-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard.

The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents.

The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.


For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

Dimensions

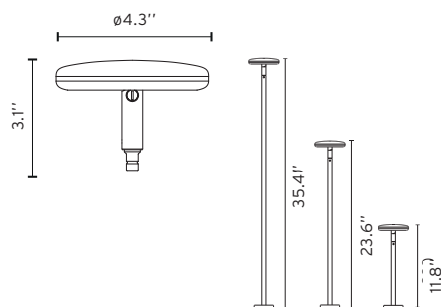

Certifications



Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.

Landlord Soft

Adjustable head for installation on outdoor ground poles.

How to specify






Part Number	Finish	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Voltage	Beam Angle	Photometrics
F004C20AU01	White	2700	80	379	242	5W	24V	12°	
F004C20AU06	Grey								
F004C20AU12	Forest Green								
F004C20AU18	Deep Brown								
F004C20AU30	Black								
F004C20AU33	Anthracite								
F004H20AU71	Anodized Black	3000	80	395	252	5W	24V		
F004C30AU01	White								
F004C30AU06	Grey								
F004C30AU12	Forest Green								
F004C30AU18	Deep Brown								
F004C30AU30	Black								
F004C30AU33	Anthracite								
F004H30AU71	Anodized Black	4000	80	421	269	5W	24V		
F004C40AU01	White								
F004C40AU06	Grey								
F004C40AU12	Forest Green								
F004C40AU18	Deep Brown								
F004C40AU30	Black								
F004C40AU33	Anthracite								
F004H40AU71	Anodized Black								



Landlord Soft

Adjustable head for installation on outdoor ground poles.

Required Accessories

<p>Pole with base. Ready for installation on solid surface. Ground installation needs earth stick use, to be ordered as separated item.</p>	<p>Earth Stick for ground installation to be combined with the pole.</p>	<p>Tree strap. Accessory for spot installation directly on three branch, from ø30mm up to ø100mm.</p>														
<p>11.8''[300 mm] Part Number:</p> <table><tr><td>F004Z010001</td><td>White</td></tr><tr><td>F004Z010006</td><td>Grey</td></tr><tr><td>F004Z010012</td><td>Forest Green</td></tr><tr><td>F004Z010018</td><td>Deep Brown</td></tr><tr><td>F004Z010030</td><td>Black</td></tr><tr><td>F004Z010033</td><td>Anthracite</td></tr><tr><td>F004Z0D0071</td><td>Anodized Black</td></tr></table>	F004Z010001	White	F004Z010006	Grey	F004Z010012	Forest Green	F004Z010018	Deep Brown	F004Z010030	Black	F004Z010033	Anthracite	F004Z0D0071	Anodized Black	<p>Part Number: F004Z060000</p> 	<p>Part Number: F004Z070000</p> 
F004Z010001	White															
F004Z010006	Grey															
F004Z010012	Forest Green															
F004Z010018	Deep Brown															
F004Z010030	Black															
F004Z010033	Anthracite															
F004Z0D0071	Anodized Black															
<p>23.6'' [600 mm] Part Number:</p> <table><tr><td>F004Z020001</td><td>White</td></tr><tr><td>F004Z020006</td><td>Grey</td></tr><tr><td>F004Z020012</td><td>Forest Green</td></tr><tr><td>F004Z020018</td><td>Deep Brown</td></tr><tr><td>F004Z020030</td><td>Black</td></tr><tr><td>F004Z020033</td><td>Anthracite</td></tr><tr><td>F004Z0E0071</td><td>Anodized Black</td></tr></table>	F004Z020001	White	F004Z020006	Grey	F004Z020012	Forest Green	F004Z020018	Deep Brown	F004Z020030	Black	F004Z020033	Anthracite	F004Z0E0071	Anodized Black		
F004Z020001	White															
F004Z020006	Grey															
F004Z020012	Forest Green															
F004Z020018	Deep Brown															
F004Z020030	Black															
F004Z020033	Anthracite															
F004Z0E0071	Anodized Black															
<p>35.4'' [900 mm] Part Number:</p> <table><tr><td>F004Z030001</td><td>White</td></tr><tr><td>F004Z030006</td><td>Grey</td></tr><tr><td>F004Z030012</td><td>Forest Green</td></tr><tr><td>F004Z030018</td><td>Deep Brown</td></tr><tr><td>F004Z030030</td><td>Black</td></tr><tr><td>F004Z030033</td><td>Anthracite</td></tr><tr><td>F004Z0F0071</td><td>Anodized Black</td></tr></table>	F004Z030001	White	F004Z030006	Grey	F004Z030012	Forest Green	F004Z030018	Deep Brown	F004Z030030	Black	F004Z030033	Anthracite	F004Z0F0071	Anodized Black		
F004Z030001	White															
F004Z030006	Grey															
F004Z030012	Forest Green															
F004Z030018	Deep Brown															
F004Z030030	Black															
F004Z030033	Anthracite															
F004Z0F0071	Anodized Black															
																

Landlord Soft

Adjustable head for installation on outdoor ground poles.

Required Accessories

LED Driver, 24VDC, 96W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 60W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 30W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED
LEDSB96W24V-VAR-Y1	LEDSB60W24V-VAR-Y1	LEDSB30W24V-VAR-Y1
