



Klein Pro H.600

Bollard Outdoor Light Designed by Flos Outdoor

Description

Clean lines, clear intersections and refined simplicity make Klein PRO barely noticeable in its surroundings offering at the same time perfect and precise functionality. The family has been reengineering and continues to amaze with its state-of-the-art LED light source. The integral imperceptible LED light source stands out when combined with anodized screen pieces to improve the general light.

Lamp


Lamp Type	LED - Edge Lighting
Wattage	5W
Initial Lumens	294 lm, 304 lm
Color Temperature	2700K, 3000K
Color rendering	CRI 80

Optical

Beam Angle	45°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Fixed
Weight	2.8 Pounds
Ingress Protection Rating	IP66
Finishes	Painted lacquer

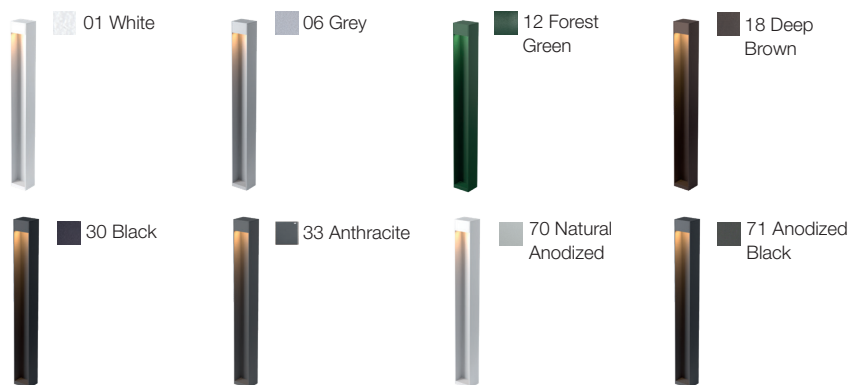

Installation type	Ground
Environment	Outdoor, Wet location
Impact protection	IK07



Dimensions



Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.



Klein Pro H.600

Bollard Outdoor Light Designed by Flos Outdoor

Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Fixture Input Voltage	24V
Control	Forward + Reverse Phase, 0-10V Dimming

Notes

- Recommended connections for in-ground installations with a 2-way terminal block 4 pole IP68 H₂O Stop on 24V side. Not supplied by FLOS, to be ordered separately.
- Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.
- During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.
- LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment. Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.
- All drivers should be installed in weather resistant enclosures (by others) or indoors.
- Silicon filled wire-nuts, should be used on all line-voltage connections to avoid syphoning moisture to electrical components.

Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Klein Pro H.600

Bollard Outdoor Light Designed by Flos Outdoor

How to specify

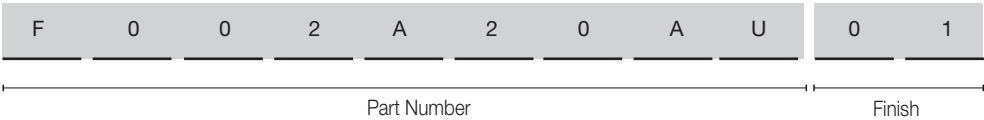




CCT	CRI	Wattage	Delivered Lumens	Part Number	Finish	Power Supply
2700K	80	5W	99 lm	F002A20AU01.A	01 White	Remote - Order separately UL
				F002A20AU06.A	06 Grey	
				F002A20AU12.A	12 Forest Green	
				F002A20AU18.A	18 Deep Brown	
				F002A20AU30.A	30 Black	
				F002A20AU33.A	33 Anthracite	
				F002A21AU70.A	70 Anodized Natural	
				F002A21AU71.A	71 Anodized Black	
3000K	80	5W	103 lm	F002A30AU01.A	01 White	Remote - Order separately UL
				F002A30AU06.A	06 Grey	
				F002A30AU12.A	12 Forest Green	
				F002A30AU18.A	18 Deep Brown	
				F002A30AU30.A	30 Black	
				F002A30AU33.A	33 Anthracite	
				F002A31AU70.A	70 Anodized Natural	
				F002A31AU71.A	71 Anodized Black	




Klein Pro H.600

Bollard Outdoor Light Designed by Flos Outdoor

Required Accessories

Surface Mounting plate for Solid Surface	Small Klein Pro ground fixing plate 1.8" x 2.2" x H6.3"	Klein Pro ground fixing plate and fixing bolts 3.3" x 3.3" x H6.3"
Part Number: <div><div></div> F002Z010001.A <div></div> F002Z010006.A <div></div> F002Z010033.A <div></div> F002Z010030.A <div></div> F002Z010018.A <div></div> F002Z010012.A</div>	Part Number: F002Z030000.A	Part Number: F002Z020000
		

Required Drivers

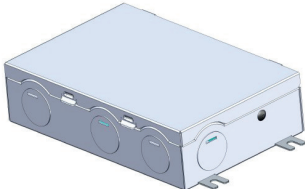LED Driver, 24VDC, 96W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 60W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED	LED Driver, 24VDC, 30W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED
LEDSB96W24V-VAR-Y1	LEDSB60W24V-VAR-Y1	LEDSB30W24V-VAR-Y1
		

Klein Pro H.600

Bollard Outdoor Light Designed by Flos Outdoor

Optional Accessories

Anodized aestetical screen piece

Part Number:

- F002Z040070 = Natural Anodized
- F002Z040071 = Black Anodized
- F002Z040073 = Gold Anodized

