




Dimensions



Certifications

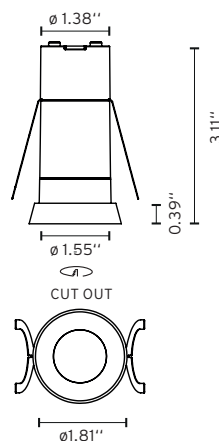

Class 2

Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.

Bon Jour 45

Ceiling Recessed Fixed Downlight

Description

LED luminaire for recessed mounting into plasterboard ceilings.

Once installed, the luminaire edge projects from of the ceiling 0.39" creating a unique and very refined aesthetic effect. The luminaire's body is injection molded aluminium.

It is available in three sizes: Bon Jour 45 (Ø 1.77"), 90 (Ø 3.54") and 145 (Ø 5.71"). Reflector made of anodized gloss aluminium with diffuser element made of polycarbonate. Available finishes: white, copper and black.

Lamp

Lamps Type	POWER LED: CREE
Wattage	4.4W
Output Nominal	524 lm, 605 lm
Color Temperature	2700K, 3000K
Color rendering	CRI90
Delivered lumens from 153lm up to 392lm	

Optical

Beam Angle	19°
Lighting Type	Direct
Light Distribution	Diffuse

Physical

Material	Aluminium (Body) / Polycarbonate (difuser)
Aiming	Fixed
Weight	0,28 lb
Ingress Protection Rating	IP44

Finishes

☐ 01 White☒ CU Copper☐ 14 Black

Installation type	Ceiling Recessed Non-IC
Environment	Indoor



Bon Jour 45

Ceiling Recessed Fixed Downlight

Electrical & Control

Voltage 120/277V, Low voltage LED

Control Dimmable 0-10V


Performance

Delivered lumens from 311 lm up to 359 lm

Efficacy 82 lm/W

Notes

Dimensions

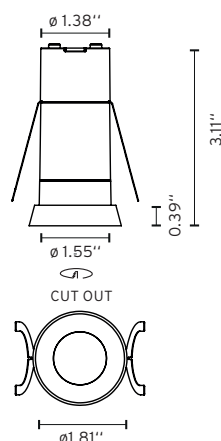

Luminaire body made of die cast aluminium.

Reflector made of anodized gloss aluminium with diffuser element made of polycarbonate.

Honeycomb and cross screening cylinder included.

Factory suggest 5" minimum plenum height.

Embedded luminaire for LED light source.

Class II Remote power supply 120/277V not included, order separately.

Beam angle is 19°

Listings: UL Listed, IP44 damp location.

Certifications



Class 2

Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty


2 years from date of sale.

Bon Jour 45

Ceiling Recessed Fixed Downlight

Fixture Type
Job Name


How to specify

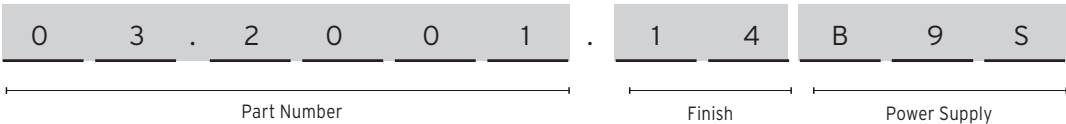

How to Specify ex. 03.2001.14B9S

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	03.2001	19.2°	Bon Jour 45, 4.4W, 524lm, 2700K, CRI 90	<div><div></div> 01 = White</div> <div><div></div> 14 = Black</div> <div><div></div> CU = Copper</div>	B9S = Class II Remote power Supply, order separately
	03.2006	19.2°	Bon Jour 45, 4.4W, 605lm, 3000K, CRI 90	<div><div></div> 01 = White</div> <div><div></div> 14 = Black</div> <div><div></div> CU = Copper</div>	B9S = Class II Remote power Supply, order separately

Photometrics

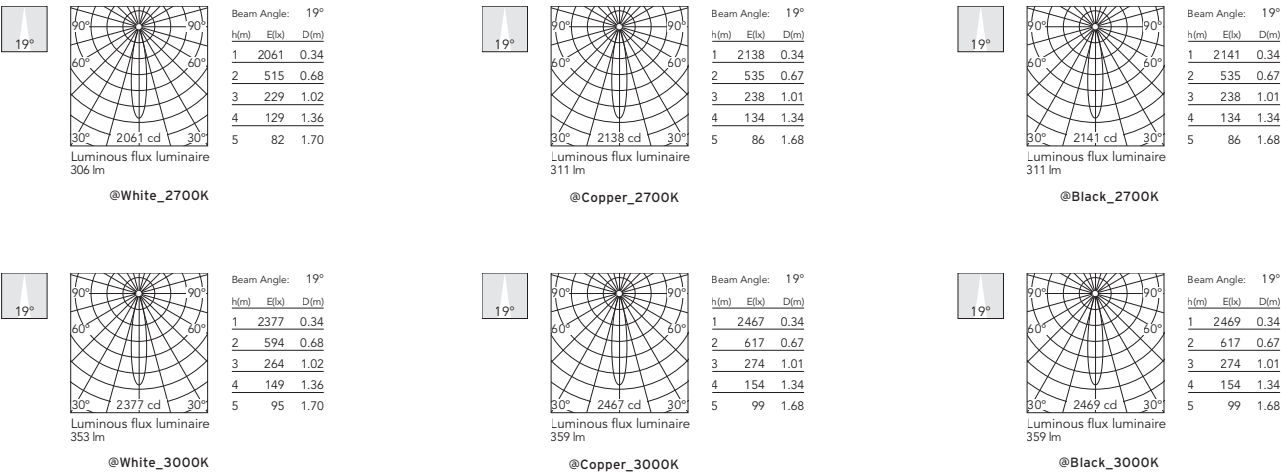

Bon Jour 45

Ceiling Recessed Fixed Downlight


Fixture Type

Job Name

Required Accessories

Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 500mA , 40W, 0-10V Dimmable, 120/277V.

Part Number:
SP40W500MA-10V-A02

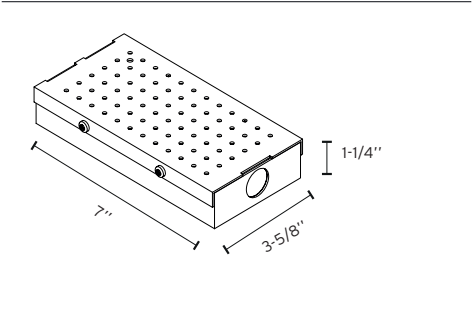

Splice Box UL 7"x3-5/8"x1-1/4", UL. With Driver Programmed to 500mA , 25W, 0-10V Dimmable, 120-277V

Part Number:
SP25W500MA-10V-A02

