

Bon Jour 90

Ceiling Recessed Fixed Downlight



Description

LED luminaire for recessed mounting into plasterboard ceilings.

Once installed, the luminaire edge projects from the ceiling 0.39" creating a unique and very refined aesthetic effect. The luminaire's body is injection molded aluminium.

It is available in three sizes: Bon Jour 45 (Ø 1.77"), 90 (Ø 3.54") and 145 (Ø 5.71"). Reflector made of anodized gloss aluminium with diffuser element made of polycarbonate. Available finishes: white, copper and black.

Lamp

Lamps Type	LED ARRAY
Wattage	16W
Output Nominal	1500 lm, 2093 lm
Color Temperature	2700K, 3000K
Color rendering	CRI90

Optical

Beam Angle	57° , 34°
Lighting Type	Direct
Light Distribution	Diffuse

Physical



Material	Aluminium (Body) / Polycarbonate (difuser)
Aiming	Fixed
Weight	1,16 lb
Ingress Protection Rating	IP44

Finishes

☐ 01 White ☒ CU Copper ☐ 14 Black



Dimensions

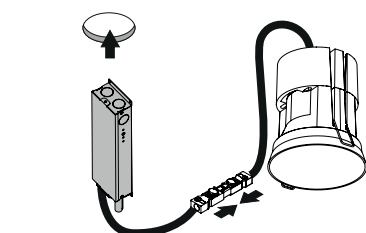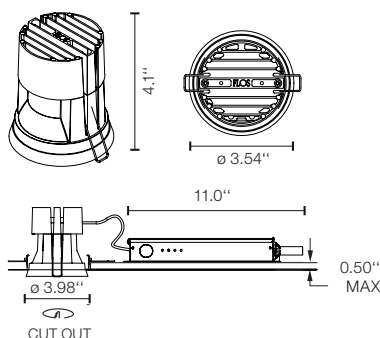

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

Installation type Ceiling Recessed Non IC

Environment Indoor



Bon Jour 90

Ceiling Recessed Fixed Downlight

Electrical & Control

Voltage 120/277V, Low voltage LED

Control Dimmable 0-10V


Performance

Delivered lumens from 383 lm up to 907 lm

Efficacy 57 lm/W

Notes

Dimensions

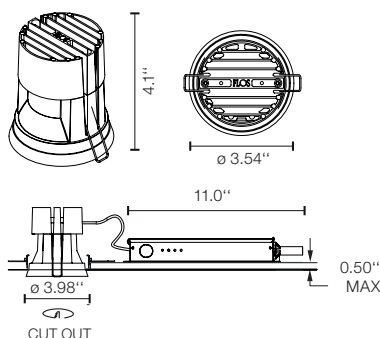

Installation frame made from thermoplastic material for installation in plasterboard ceilings required to be ordered separately.

Luminaire body made of die cast aluminium. Reflector made of anodized gloss aluminium with diffuser element made of polycarbonate.


Honeycomb and cross screening cylinder available to be ordered separately.

Embedded luminaire for LED light source. Remote 120/277V "integral" LED power supply included.

Requires pre-installation frame ring, must be ordered separately.

Factory suggests 10" minimum plenum height.

Listings: UL Listed, IP44 damp location.



Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS, USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011


For more information contact your representative or go to architectural.flosusa.com
©2025 Specifications and dimensions subject to change without notice. Issued 09.30.2025



Bon Jour 90

Ceiling Recessed Fixed Downlight


How to specify

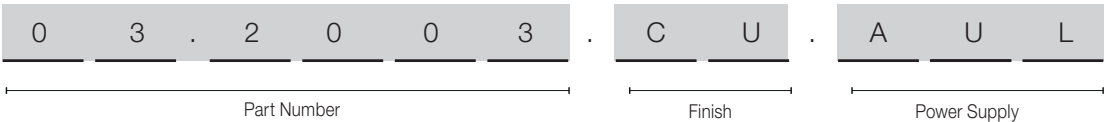

How to Specify ex. 03.2003.CU.UL

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	03.2003	56° 56° 34°	Bon Jour 90, LED, 13.5W, 1500lm, 2700K, CRI 90	<input type="checkbox"/> 01 = White <input checked="" type="checkbox"/> 14 = Black <input checked="" type="checkbox"/> CU = Cooper	AGT = Splice Box, 10% dim, ELV, 120V AUL = Splice Box, 1% dim, 0-10V, 120V A7U = Splice Box, 1% dim, 0-10V, 277V
	03.2007	56° 56° 34°	Bon Jour 90, LED, 16W, 1600lm, 3000K, CRI 90	<input type="checkbox"/> 01 = White <input checked="" type="checkbox"/> 14 = Black <input checked="" type="checkbox"/> CU = Cooper	AGT = Splice Box, 10% dim, ELV, 120V AUL = Splice Box, 1% dim, 0-10V, 120V A7U = Splice Box, 1% dim, 0-10V, 277V

Photometrics

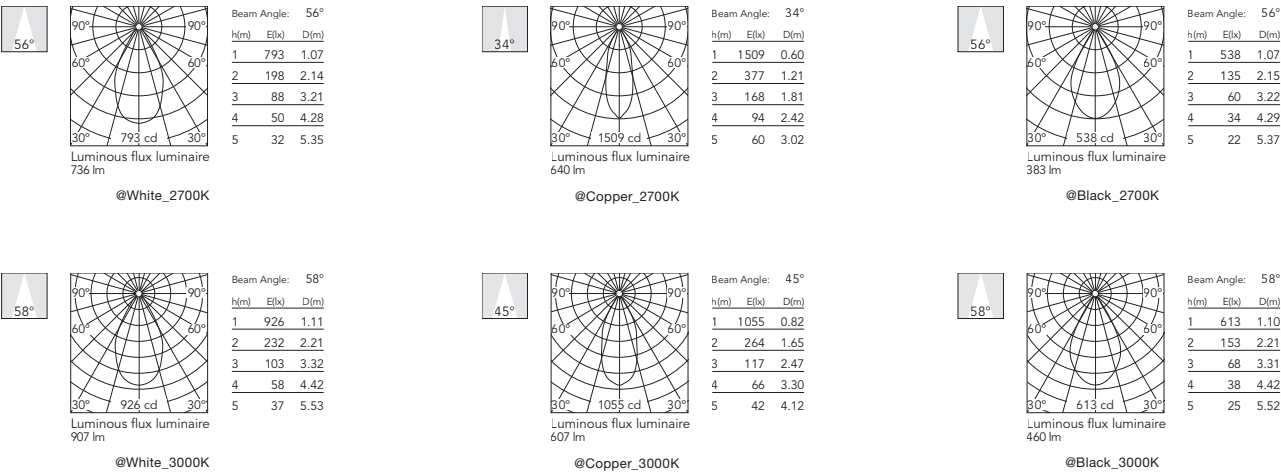

Bon Jour 90

Ceiling Recessed Fixed Downlight

Required Aecessories

Installation Frame ring until 1/2" ceiling thickness	Cross baffle + Honeycomb	Registration tray -non electrical, place holder for non IC new construction
Part Number: 08.8974.00	Part Number: 08.8976.14	Part Number: TRAY-0006
