



TOP VIEW

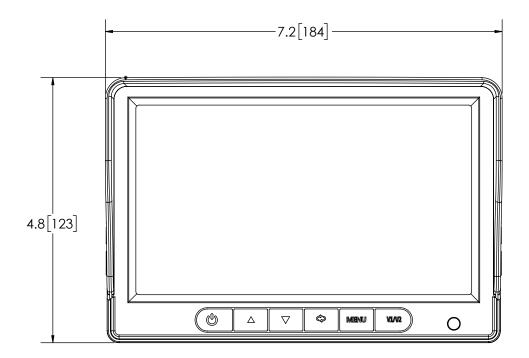

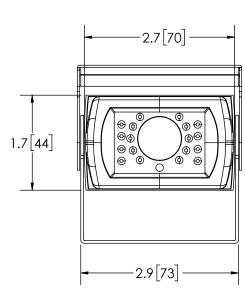

FRONT VIEW

B REVISED PER EC6416 C REVISED PER EC6416

REVISION HISTORY

DESCRIPTION

DATE

2018-03-27

2021-10-01

2022-10-21

SPECIFICATIONS

1. CERTIFICATIONS: **(€**; ECE R10; FCC;

A INITIAL RELEASE PER EC4713

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. DISPLAY: 16:9 7 IN.
- 3. RESOLUTION: 800 x 480 (PIXELS)
- 4. COLOR SYSTEM: PAL/NTSC
- 5. VOLTAGE (NOMINAL): 12-24 VDC
- 6. VOLTAGE (EXTREME): 10-32 VDC
- 7. POWER (NOMINAL): 2.9W (@ 12 VDC NOMINAL)
- 8. TEMPERATURE RANGE: -22°F (-30°C) TO 158°F (70°C)
- 9. CONNECTION: 7 PIN CABLE
- 10. RECOMMENDED MOUNTING: ADJUSTABLE BASE SUPPORT
- 11. PRODUCT WEIGHT: 0.64 LBS (0.0 Kg)
- 12. AUDIO: NO
- 13. DAY/NIGHT SENSOR: YES
- 14. WIRELESS: NO

MONITOR SPECIFICATIONS

SPECIFICATIONS

1. CERTIFICATIONS: **(€**; ECE R10; IP69K FCC,UKCA;

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. LENS ANGLE: 120°
- 3. RESOLUTION: 725 X 488 (PIXELS)
- 4. 18 IR LEDs FOR NIGHT VISION (8-10M VISIBILITY)
- 5. VOLTAGE (NOMINAL): 12 VDC
- 6. VOLTAGE (EXTREME): 10-16 VDC
- 7. POWER (NOMINAL): 0.95W (@ 12 VDC NOMINAL)
- 8. TEMPERATURE RANGE: -22°F (-30°C) TO 158°F (70°C)
- 9. CONNECTION: 4 PIN CABLE
- 10. RECOMMENDED MOUNTING: UNIVERSAL BRACKET
- 11. PRODUCT WEIGHT: 0.6 LBS (0.27 Kg)
- 12. AUDIO: NO

CAMERA SPECIFICATIONS

			1								
SCALE 1:1.75			APF	PROVALS	DATE	12					
	GENERATED DRA		DRAWN BY	ABD	2022-10-18		2	EC	:CC	www.eccolin	ık.com
DO NOT MANUALLY UPDATE. MODEL REFERENCED: A			CHECKED	BTK	2022-10-19		~				
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG.			Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 6332244					,
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES • 0.5°	ELEC. ENG.			CAN	l S	YS,7"CC	OLOR,M70	000B,C2013B,T0	C20-4E
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.	JRT	2022-10-19	CUSTOME K70					
TH	IRD ANGLE PROJECTI	± 1/64	SALES.			K/U	UU	D			_
						SIZE: B		DWG. NO	•	K7000B	REV.
			Electronically Controlled Use Latest Copy			SHEET 1	OF 1	Project: EC4	1713	Date Created: 2017-11-28	

NOTES: 1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPREY OF ELECTIONIC CONTROLS COMPANY AND DOTHER PURPOSE OF THE PROPREY CANDESSHOWN AND THE DESIGN AND OTHER PURPOSE OF THE PROPREY OF THE DATE OF THE PURPOSE OF THE PURPOSE